


# EDCON-COMPONENTS






## SPECIFICATION:

Current Rating: 50mA / 12VDC  
 Insulator Resistance: 100 Megaohm min.  
 Dielectric Withstanding: AC 250V  
 Operating Temperature: -25°C to +70°C  
 Travel: 0,25mm ± 0,1mm  
 Insulator Material: PA66  
 Cover: PA66  
 Contact Plating: Stainless Steel Silver plated  
 Terminal: Brass Silver plated  
 Sealed Character: IP67

## P.C.B Layout

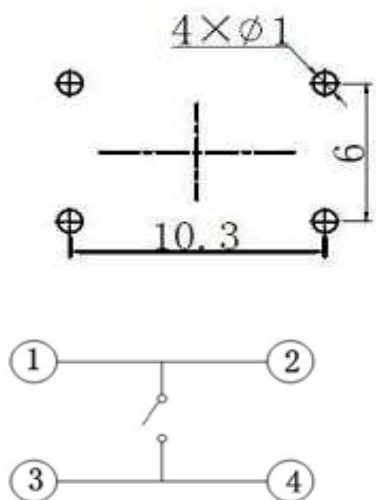

## Drawing

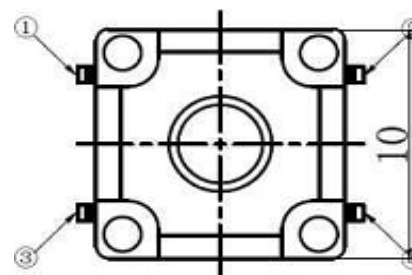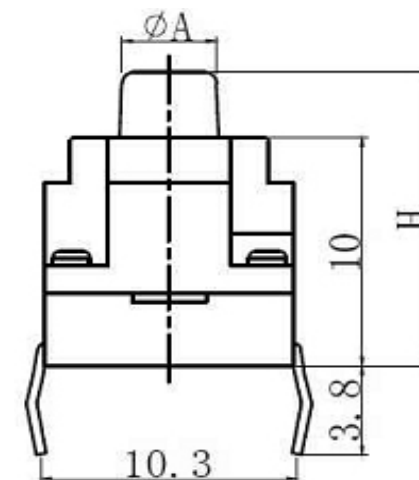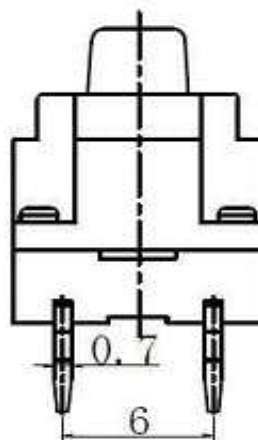

**Waterproof TACT SWITCH  
THT 10x10mm**

Part No.: **Q11105**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	



# EDCON-COMPONENTS



## Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
<b>Q11105</b>	<b>130</b>	<b>X</b>	<b>231</b>	<b>N</b>	<b>104</b>	<b>X</b>	<b>R</b>	<b>BU</b>		

xxx= Look Knob Order Code L	X= no function	231= 230gr	N= without Peg	104= 100000 cycles	X= no function	N= non ROHS	BU= Bulk Ware
		331= 330gr				R= ROHS conform	

**Waterproof TACT SWITCH  
THT 10x10mm**


Part No.: **Q11105**

Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy			Sheet No.	3 from 4



Soldering Profile for Lead Soldering

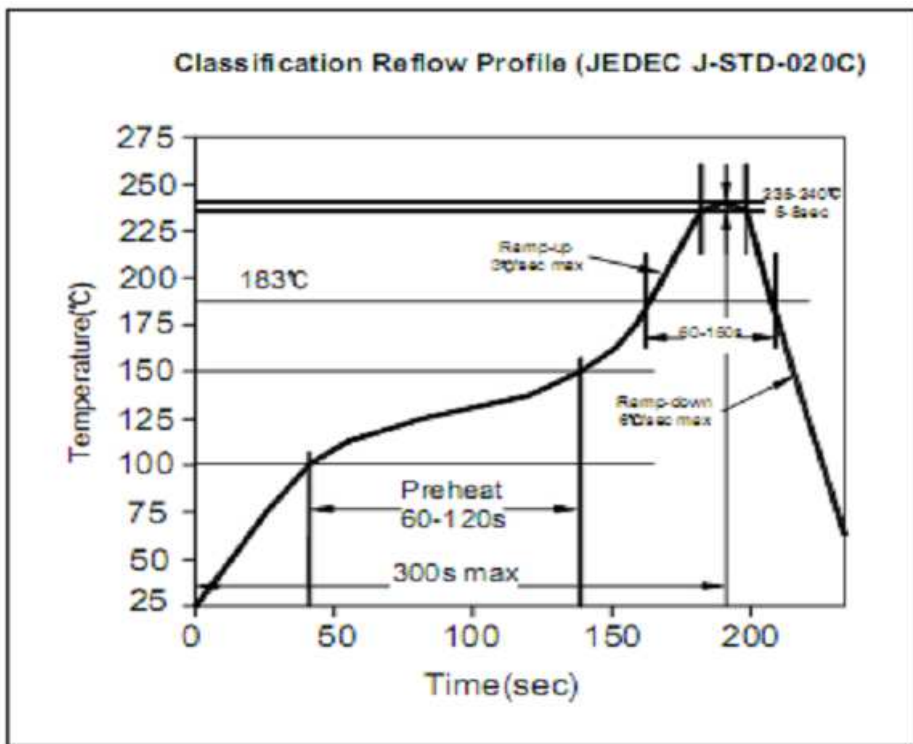

Soldering Profile for Lead Free Soldering

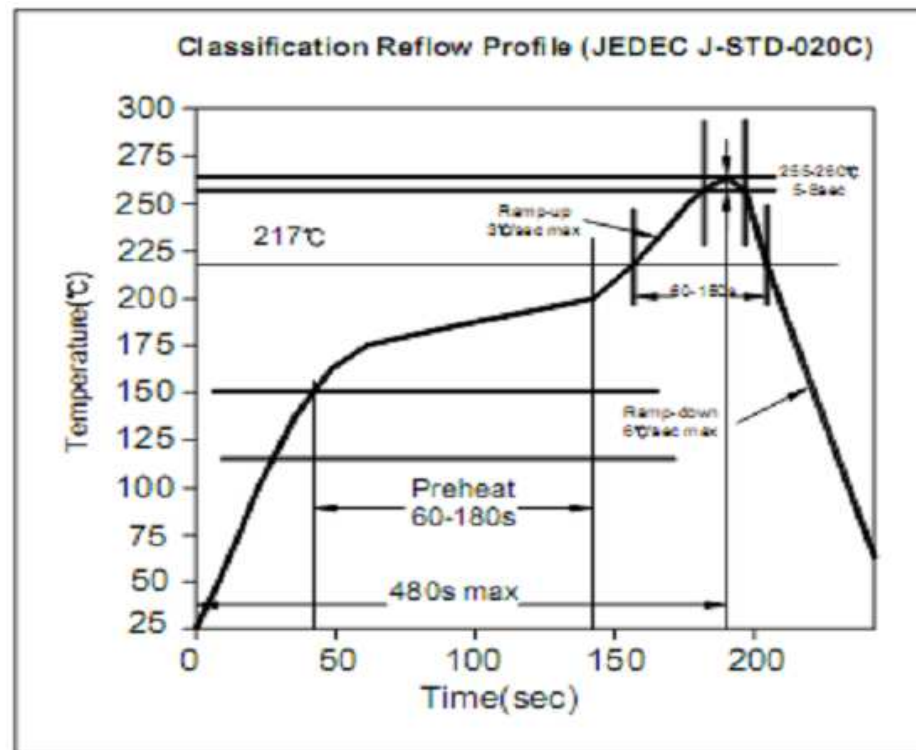

**Waterproof TACT SWITCH  
THT 10x10mm**

Part No.: **Q11105**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	Customer: