


EDCON-COMPONENTS





SPECIFICATION:



Current Rating: 50mA / 12VDC
 Insulator Resistance: ≥ 100 Megaohm min.
 Dielectric Withstanding: AC 250V
 Operating Temperature: -25°C to $+70^{\circ}\text{C}$
 Travel: $0,25\text{mm} \pm 0,1\text{mm}$
 Contact Resistance: $\leq 0,03 \Omega$

 Contact Plating: Stainless Steel Silver plated
 Terminal: Brass Silver plated

P.C.B Layout

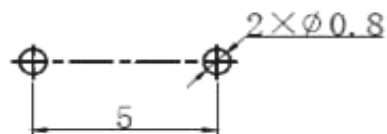

Drawing

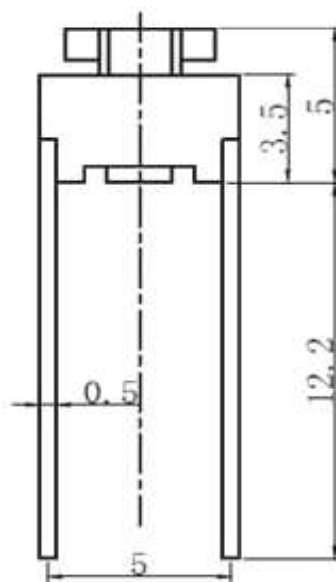



Round TACT SWITCH THT

Part No.: **Q11116**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS

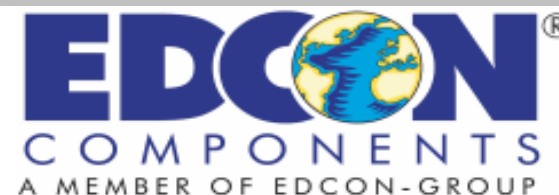


Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q11116	050	X	181	N	104	X	R	BU		


050 = 5,0mm			N = without Peg			N = non ROHS	BU = Bulk Ware
		181 = 180gr				R = ROHS conform	
				104 = 100000 cycles			
		281 = 280gr					

Round TACT SWITCH THT	
Part No.:	Q11116
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering Profile for Lead Soldering

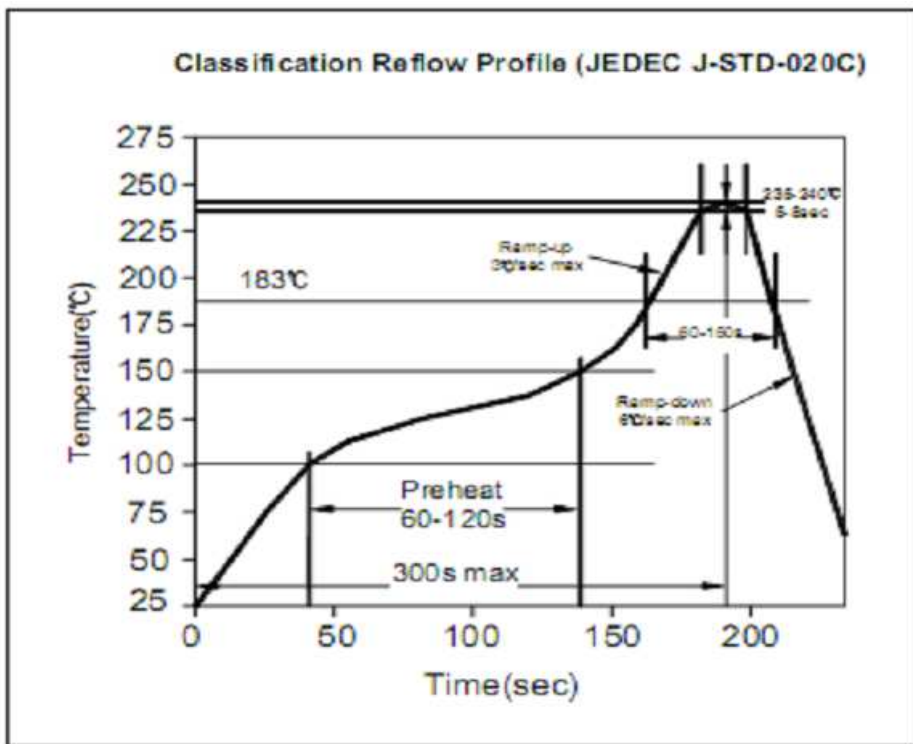

Soldering Profile for Lead Free Soldering

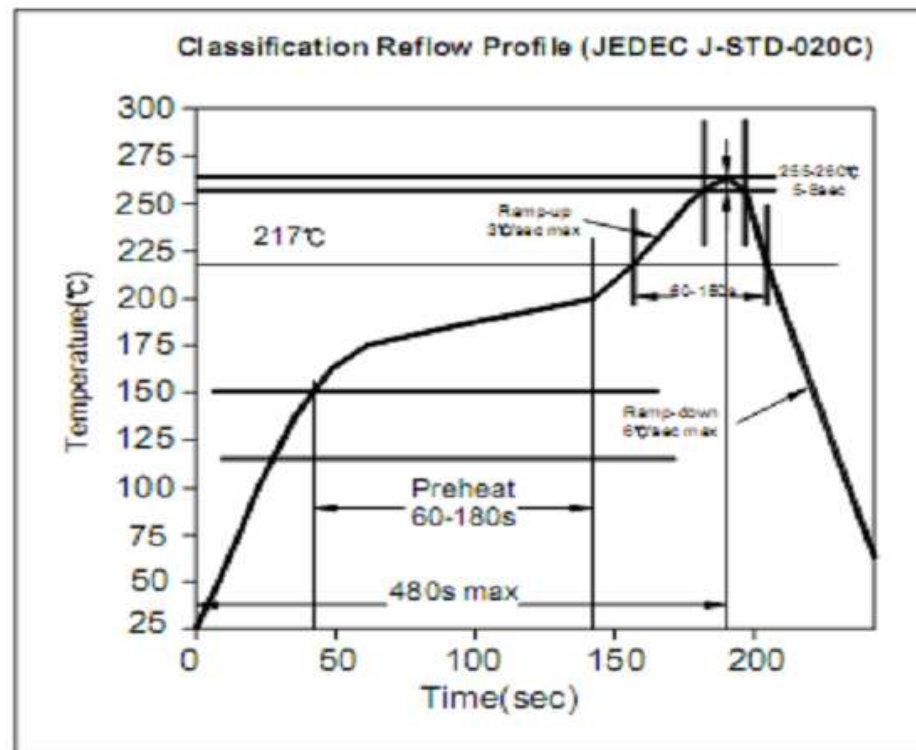

Round TACT SWITCH THT

Part No.: Q11116

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: