

EDCON-COMPONENTS




SPECIFICATION:

Current Rating:	DC12V / 50mA
Insulator Resistance:	≥100 Mega Ω min.
Contact Resistance:	≤100 mΩ max.
Travel:	0,25 / +/- 0,1mm
Operating Temperature:	.-25°C to +70°C
Lifetime:	look order code
Operating Force:	look order code


Common Specifications

Life Test	50/80 Cycles / Min with 5VDC 5mA Resistive load Cycles of Operation: As per individual Specifications
Dry Heat Proof	80°C +/- 2°C for 96hours after Test Kept in Normal Condition for 30Min.
Moisture Resistance	60°C +/- 2°C 90~95% RH for 96 Hours After Test, Kept in Normal Condition for 30 Minutes
Cold Proof	. 30°C for 96 Hours After Test Kept in Normal Condition for 30 Minutes.
Operating Force	If refers to the maximum load at the time of switching over of the contacts. (Point A in the figure)
Travel	This refers to the state of repeating the contact opening or closing momentarily at the time of the changeover of the switch to ON or OFF. Longer duration of this state


Drawing

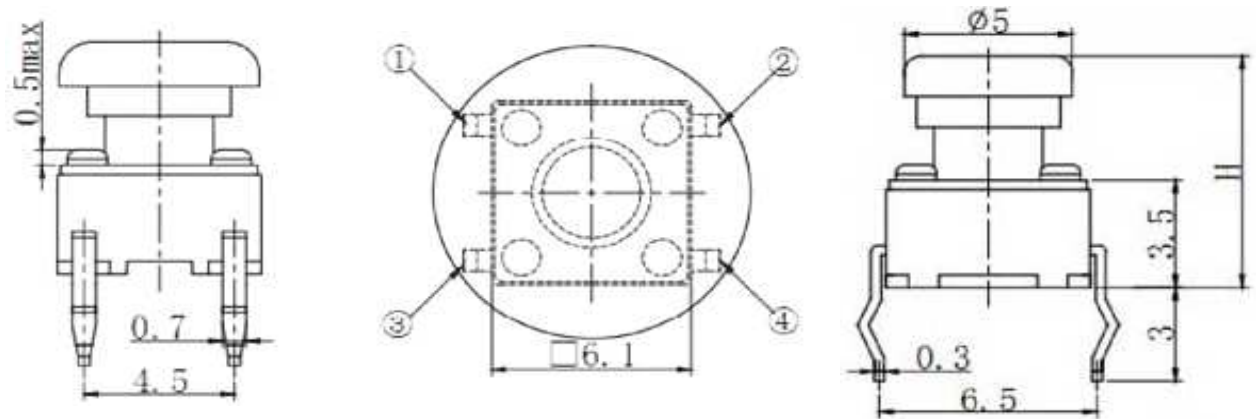

PCB Layout

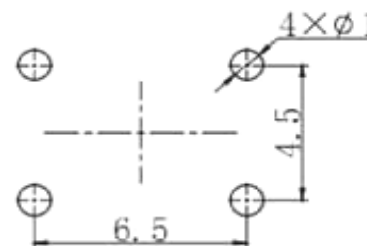

Circuit Diagramm

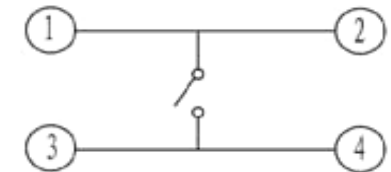

**TACT SWITCH THT 6,1x6,1mm
with Knob**

Part No.: **Q11125**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

www.edcon-components.com

email: info@edcon-components.com



EDCON®
COMPONENTS
A MEMBER OF EDCON-GROUP

Knob Order Code L	Height (mm)
070	7,0
074	7,4
075	7,5
076	7,6
080	8,0
083	8,3
085	8,5
090	9,0
095	9,5
098	9,8
100	10,0
105	10,5
110	11,0
113	11,3
115	11,5
120	12,0
125	12,5
130	13,0
135	13,5
140	14,0
145	14,5
150	15,0
155	15,5
160	16,0
165	16,5
166	16,6

[illegible][illegible]

**TACT SWITCH THT 6,1x6,1mm
with Knob**

Part No.: **Q11125**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total length (L)	Function	Operating Force	Function	Electrical life	Function	ROHS	Packing		
Q11125	070	N	181	N	803	N	R	BU		
xxx= Please look Knob Order Code		N= No function	181 = 180gr	N= No function	803= 80000 cycles by 100gr. O-Force	N= No function	N= non ROHS	BU= Bulk Ware		
					803= 80000 cycles by 130gr. O-Force		R= ROHS conform			
					803= 80000 cycles by 160gr. O-Force					
			281= 280gr		503= 50000 cycles by 250gr. O-Force					
					503= 50000 cycles by 350gr. O-Force					
					303= 30000 cycles by 500gr. O-Force					

**TACT SWITCH THT 6,1x6,1mm
with Knob**


Part No.: **Q11125**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	

Customer:


Soldering Profile for Lead Free Soldering

Classification Reflow Profile (JEDEC J-STD-020C)

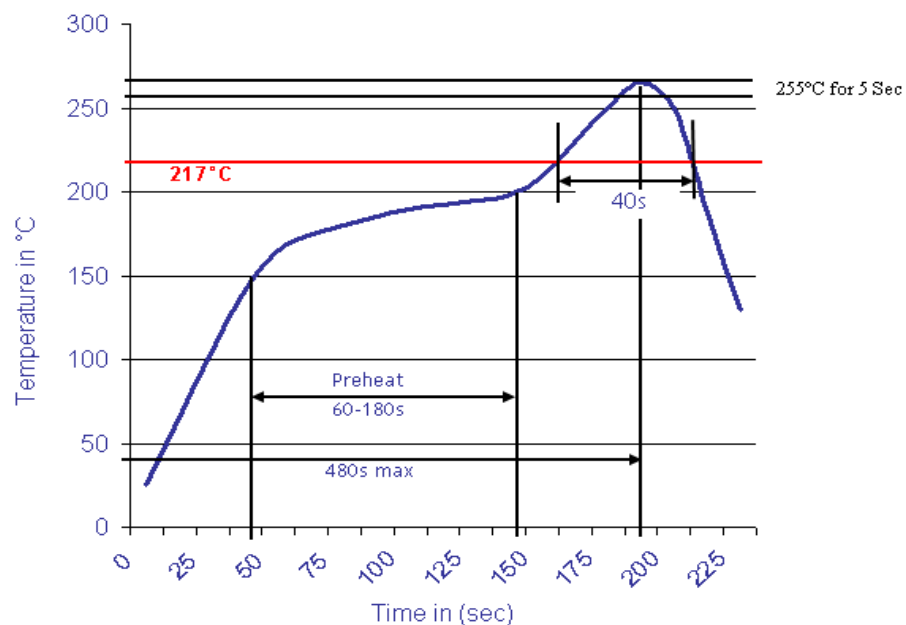
**TACT SWITCH THT 6,1x6,1mm
with Knob**

 Part No.: **Q11125**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	