


# EDCON-COMPONENTS





## SPECIFICATION:

Current Rating: 50mA / 12VDC  
 Insulator Resistance: 100 Megaohm min.  
 Dielectric Withstanding: AC 250V  
 Operating Temperature: -25°C to +70°C  
 Travel: 1,5mm ± 0,3mm  
 Insulator Material: PA66  
 Cover: PA66  
 Contact Plating: Stainless Steel Silver plated  
 Terminal: Brass Silver plated  
 Sealed Character: IP67

## P.C.B Layout

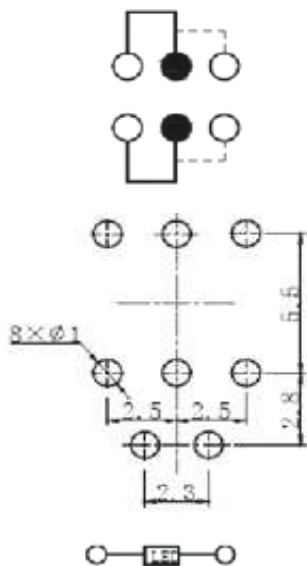

## Drawing

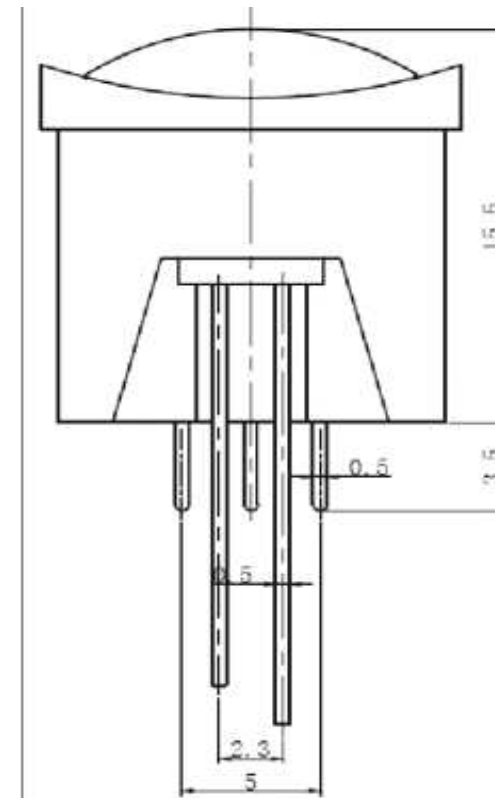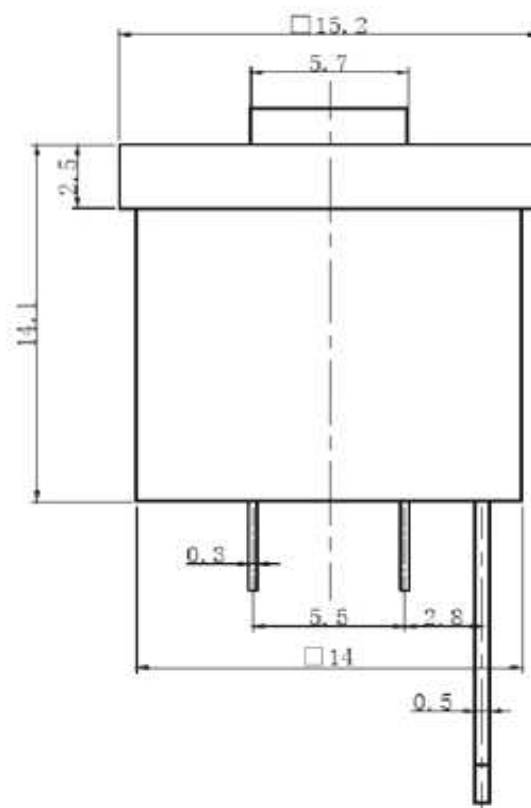

**PUSH SWITCH THT LOCK /  
UNLOCK w. LED**

Part No.: **Q11130**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

# EDCON-COMPONENTS



## Ordering Informations

Serie	Knob Color	Body Color	Operating Force	LED Illuminated	Electrical life	Fill with 0	ROHS	Packing		
<b>Q11130</b>	<b>RD</b>	<b>LG</b>	<b>101</b>	<b>BL</b>	<b>104</b>	<b>X</b>	<b>R</b>	<b>BU</b>		

<b>RD= Red</b>	<b>LG= Light Gray</b>	<b>101= 100gr</b>	<b>BL= Blue</b>	<b>104= 100000 cycles</b>	<b>X= no function</b>	<b>N= non ROHS</b>	<b>BU= Bulk Ware</b>
<b>BL= Blue</b>	<b>BK= Black</b>	<b>301= 300gr</b>	<b>RD= Red</b>			<b>R= ROHS conform</b>	
<b>GN= Green</b>			<b>GN= Green</b>				
			<b>YE= Yellow</b>				
			<b>WH= White</b>				

**PUSH SWITCH THT LOCK /  
UNLOCK w. LED**


Part No.: **Q11130**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3


Customer:



Soldering Profile for Lead Soldering

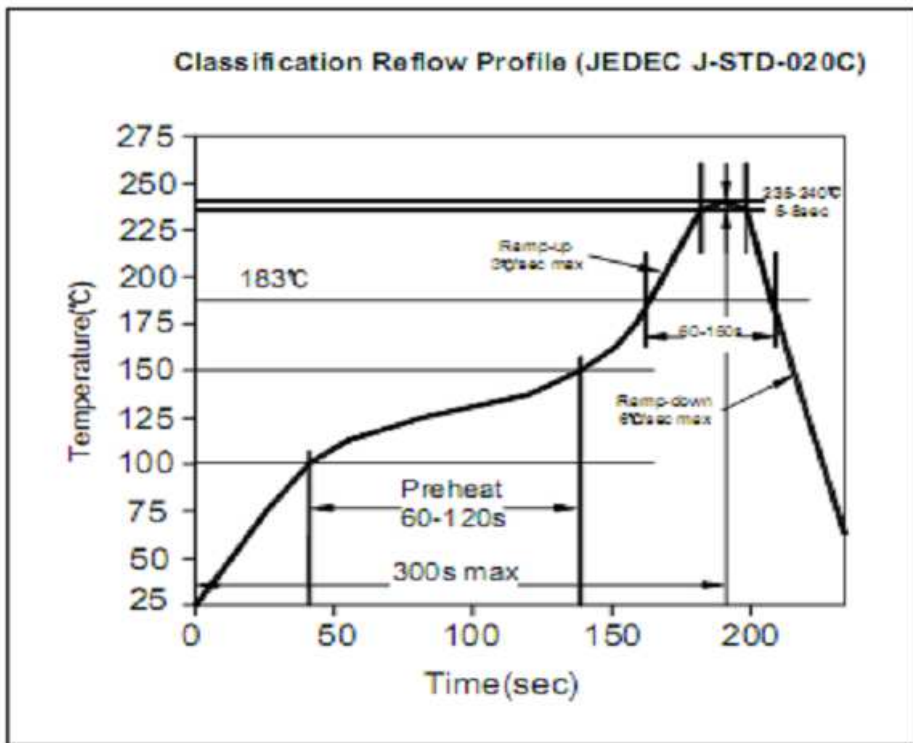

Soldering Profile for Lead Free Soldering

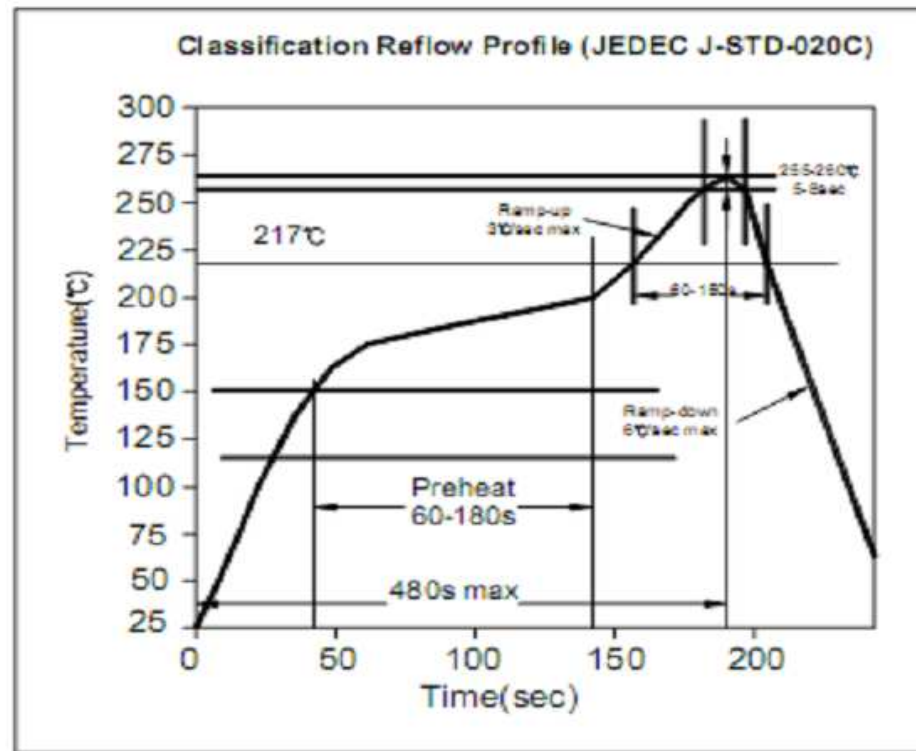

**PUSH SWITCH THT LOCK / UNLOCK w. LED**

Part No.: **Q11130**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	27.07.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: