


EDCON-COMPONENTS






2,3VA Standard PCB Encapsulated -Transformer

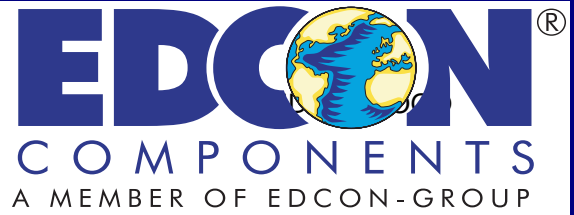

Technical specifications

- Power from 0,6VA to 36VA
- Dielectric Strength - 3750 Vrms
- High ambient operation temperature (+75°C)
- Primary (115V 60HZ / 230V/50Hz)
- Secondary Single or Dual Output
- Insulation Class - Class B (130°C)
- Safety Approvals VDE / CE

Technical drawing

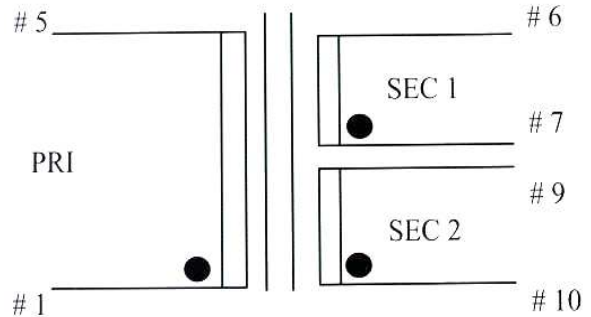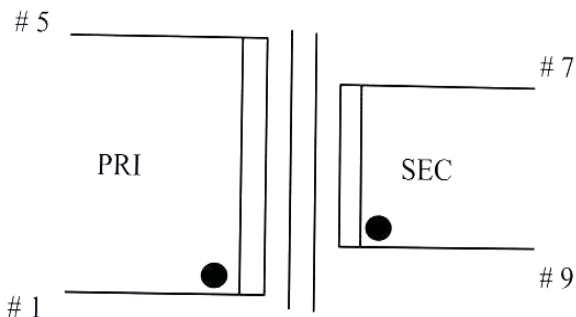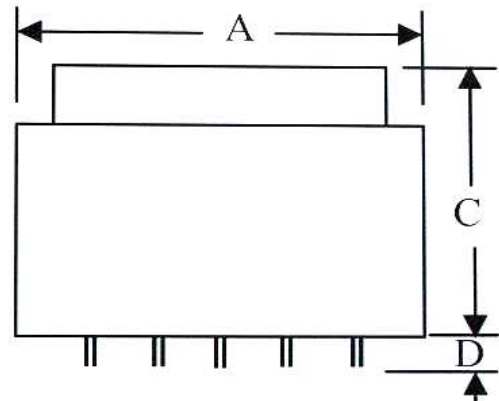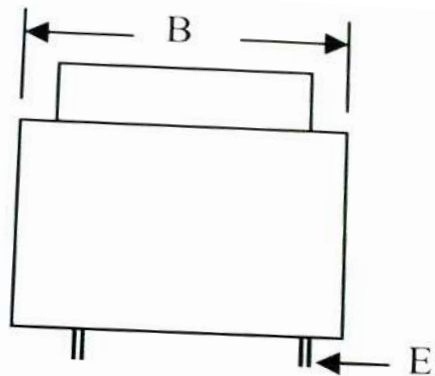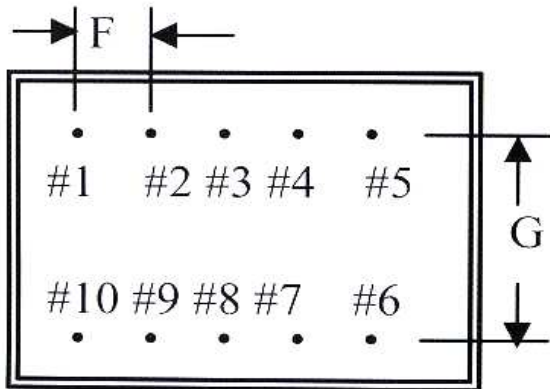


Single Output

Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

2,3VA Standard PCB Encapsulated -Transformer

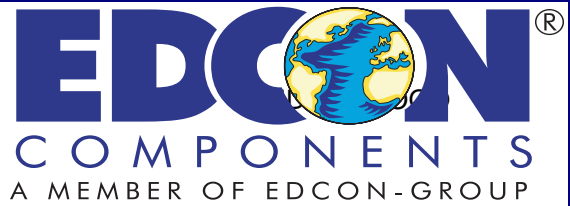

Technical dimensions

| Serie | Dimensions (mm) | | | | | | |
|-----------------|-----------------|--------|--------|--------|--------|--------|--------|
| | A | B | C | D | E | F | G |
| 2,3 (VA) | 33,0 | 27,8 | 29,8 | 4,0 | 0,8 | 5,0 | 20,0 |
| Toler. (mm) | ./-0,5 | ./-0,8 | ./-0,5 | ./-1,0 | ./-0,1 | ./-0,2 | ./-0,5 |

Ordering Informations

| Serie | Core | Output Layer | Output Voltage | |
|--------|------|--------------|----------------|--|
| V11008 | 30 | S | 060 | |

S= Single Output for 230VAC
US= Single Output for 115VAC
060 = 6V
072 = 7,2V
090 = 9V
100 = 10V
120 = 12V
150 = 15V
180 = 18V
240 = 24V

6V = 383mA
 7,2V = 319mA
 9V = 255mA
 10V = 230mA
 12V = 191mA
 15V = 153mA
 18V = 127mA
 24V = 96mA

Standard PCB Encapsulated Transformer