


EDCON-COMPONENTS






2,8VA Standard PCB Encapsulated -Transformer

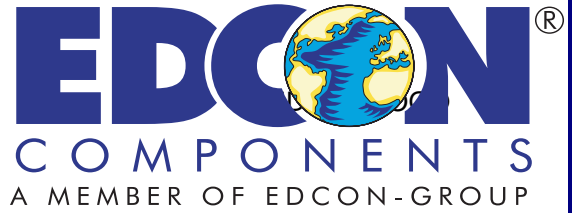

Technical specifications

Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

Technical drawing

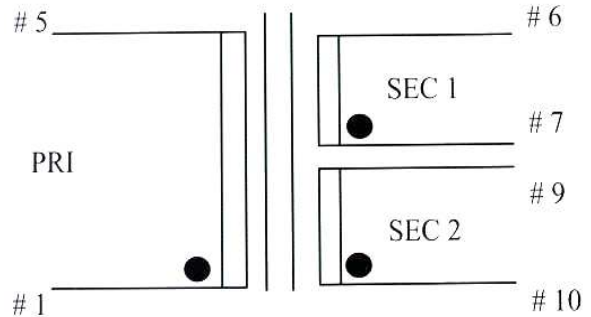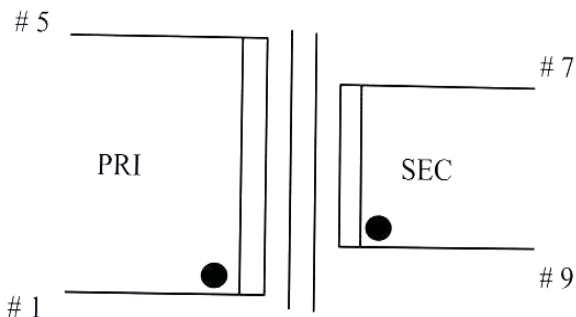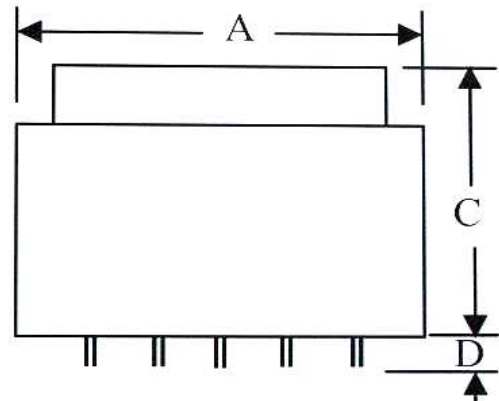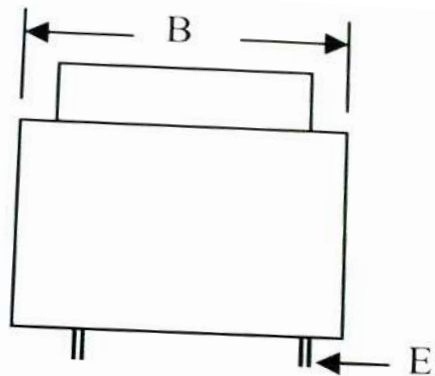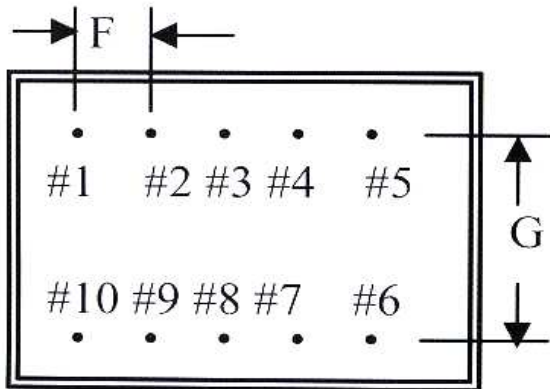


Single Output

Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

2,8VA Standard PCB Encapsulated -Transformer

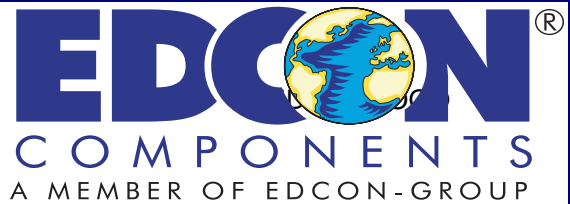

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
2,8 (VA)	33,0	27,8	29,8	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11011	30	S	060	

S= Single Output for 230VAC
US= Single Output for 115VAC
060 = 6V
072 = 7,2V
090 = 9V
100 = 10V
120 = 12V
150 = 15V
180 = 18V
240 = 24V

6V = 466mA
 7,2V = 388mA
 9V = 311mA
 10V = 280mA
 12V = 233mA
 15V = 186mA
 18V = 155mA
 24V = 116mA

Standard PCB Encapsulated Transformer