


# EDCON-COMPONENTS





## 3,0VA Standard PCB Encapsulated -Transformer

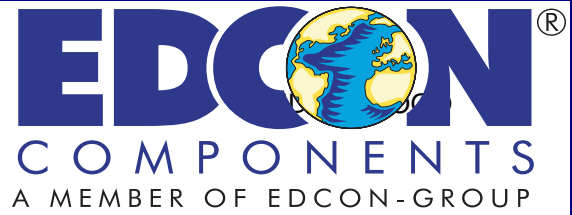


### Technical specifications

Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

### Technical drawing

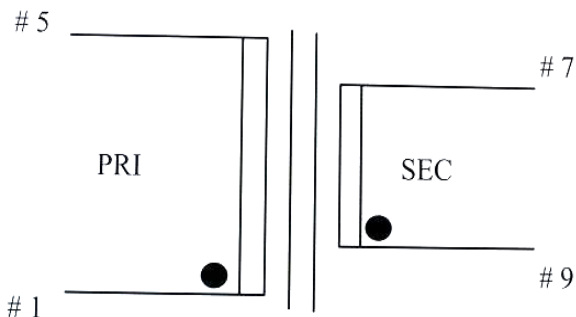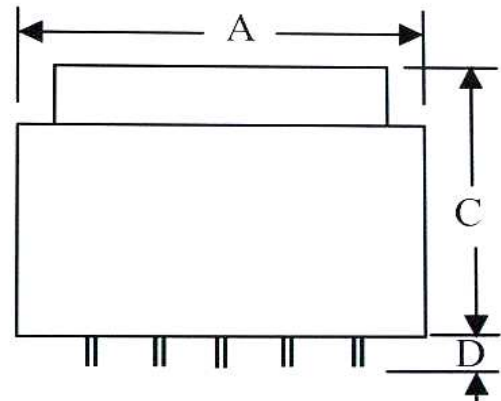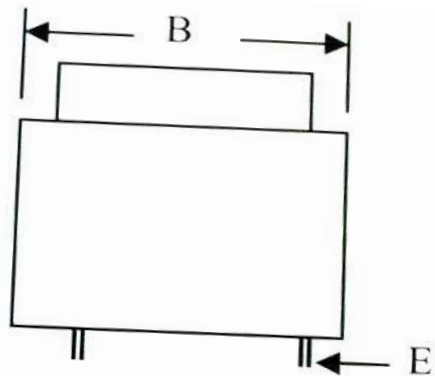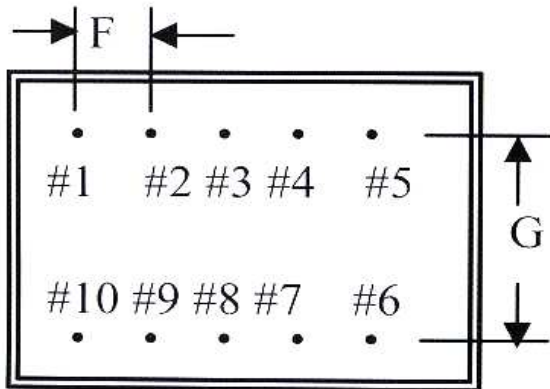

Single Output

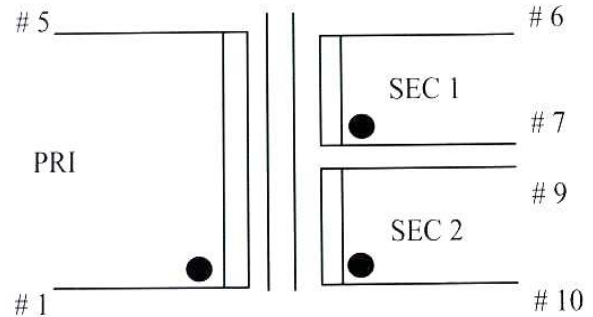


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 3,0VA Standard PCB Encapsulated -Transformer

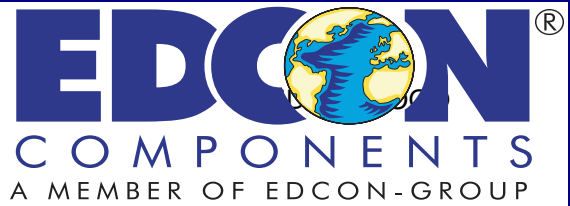

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
3,0 (VA)	33,0	27,8	35,0	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11012	30	S	060	

**S=** Single Output for 230VAC  
**US=** Single Output for 115VAC  
**060** = 6V  
**072** = 7,2V  
**090** = 9V  
**100** = 10V  
**120** = 12V  
**150** = 15V  
**180** = 18V  
**240** = 24V

6V = 500mA  
 7,2V = 417mA  
 9V = 333mA  
 10V = 300mA  
 12V = 250mA  
 15V = 200mA  
 18V = 167mA  
 24V = 125mA

Standard PCB Encapsulated Transformer