



EDCON-COMPONENTS

3,2VA Standard PCB Encapsulated -Transformer


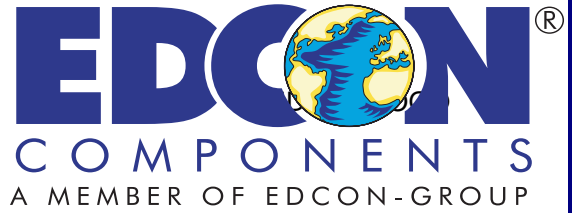


Technical specifications


Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

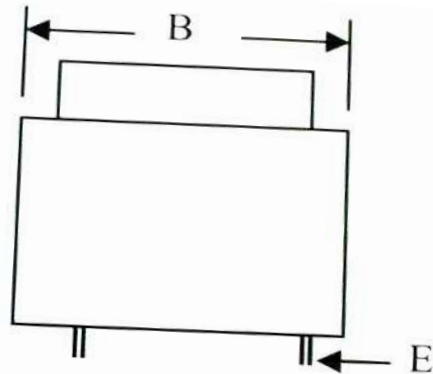


Technical drawing

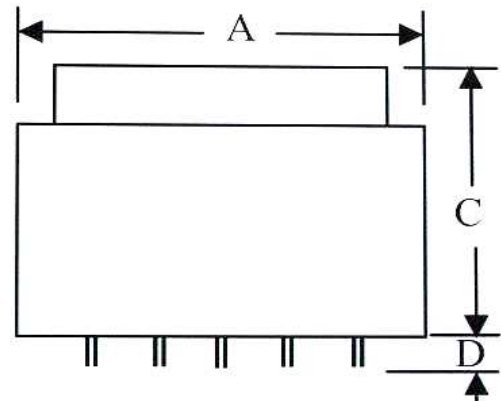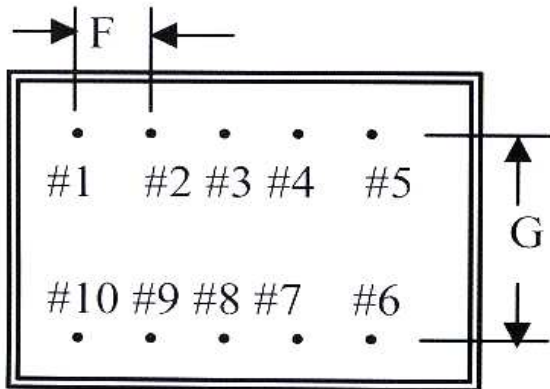

Empty pin shall be omitted if necessary.

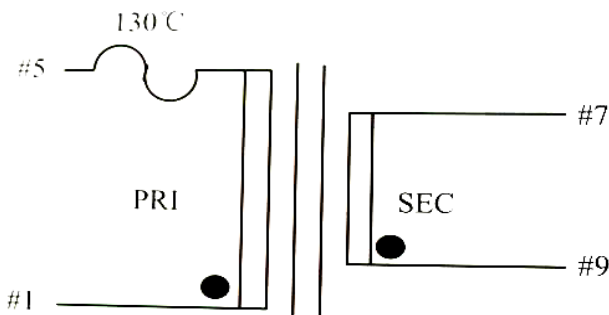

Single Output

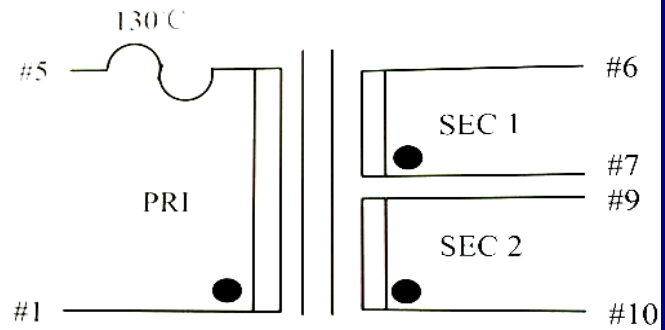


Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

3,2VA Standard PCB Encapsulated -Transformer

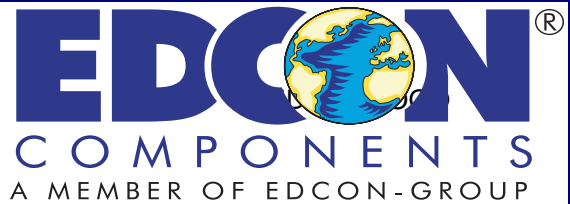

Technical dimensions

| Serie | Dimensions (mm) | | | | | | |
|-----------------|-----------------|------|------|--------|-----------|--------|--------|
| | A | B | C | D | E | F | G |
| 3,2 (VA) | 41,5 | 35,5 | 28,5 | 4,0 | 0,64*0,64 | 5,0 | 25,0 |
| Toler. (mm) | max. | max. | max. | ./-1,0 | ./-0,1 | ./-0,2 | ./-0,5 |

Ordering Informations

| Serie | Core | Output Layer | Output Voltage | |
|---------------|-----------|--------------|----------------|--|
| V11014 | 38 | S | 060 | |

S= Single Output for 230VAC
US= Single Output for 115VAC
060 = 6V
072 = 7,2V
090 = 9V
100 = 10V
120 = 12V
150 = 15V
180 = 18V
240 = 24V

6V = 533mA
 7,2V = 444mA
 9V = 355mA
 10V = 320mA
 12V = 266mA
 15V = 213mA
 18V = 177mA
 24V = 133mA

Standard PCB Encapsulated Transformer