



# EDCON-COMPONENTS

## 4,0VA Standard PCB Encapsulated -Transformer


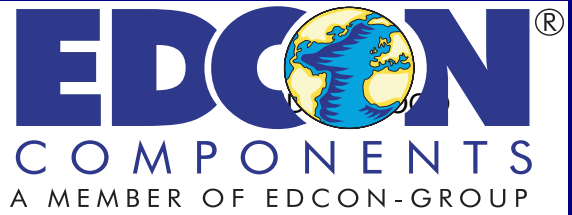


### Technical specifications


Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

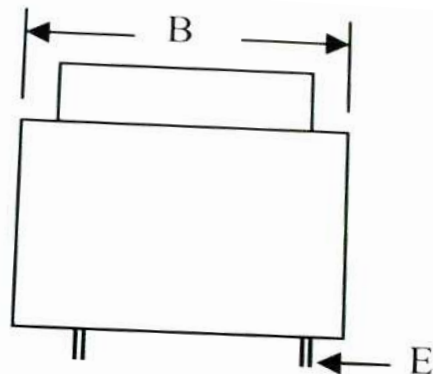


### Technical drawing

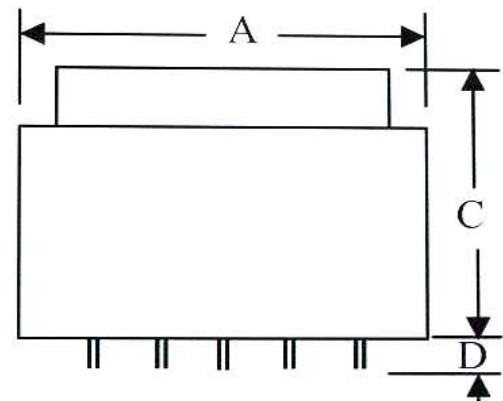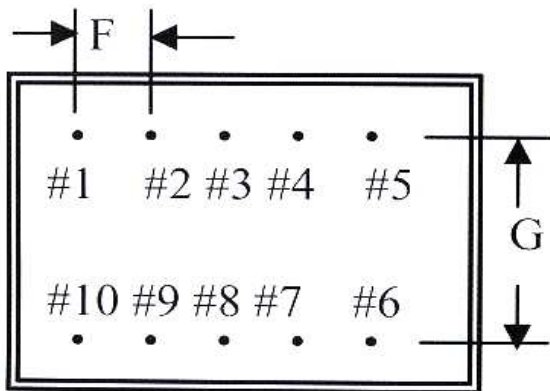

Empty pin shall be omitted if necessary.

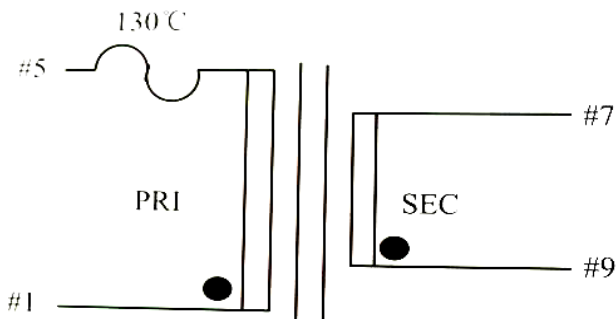

Single Output

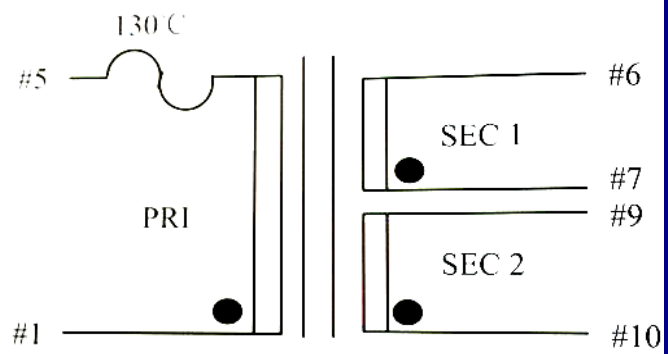


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 4,0VA Standard PCB Encapsulated -Transformer

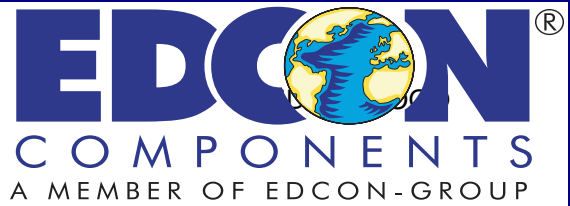

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
4,0 (VA)	41,5	35,5	28,5	4,0	0,64*0,64	5,0	25,0
Toler. (mm)	max.	max.	max.	./-1,0	./-0,1	./-0,2	./-0,5

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11015	38	S	060	

**S=** Single  
Output for  
230VAC

**US=** Single  
Output for  
115VAC

**060** = 6V  
**072** = 7,2V  
**090** = 9V  
**100** = 10V  
**120** = 12V  
**150** = 15V  
**180** = 18V  
**240** = 24V

6V = 666mA  
7,2V = 556mA  
9V = 444mA  
10V = 400mA  
12V = 333mA  
15V = 267mA  
18V = 222mA  
24V = 167mA

Standard PCB Encapsulated Transformer