


# EDCON-COMPONENTS




## 8,0VA Standard PCB Encapsulated -Transformer

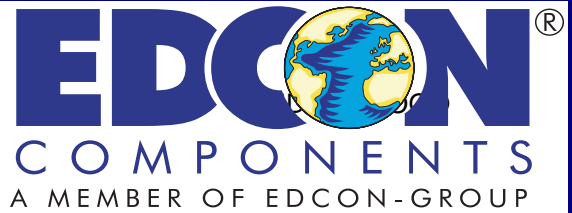


### Technical specifications

Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

### Technical drawing

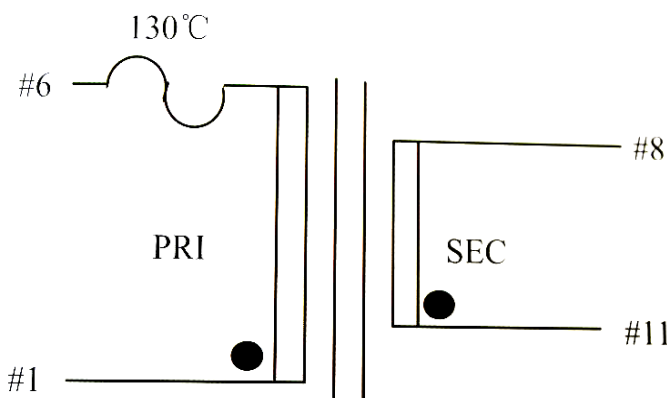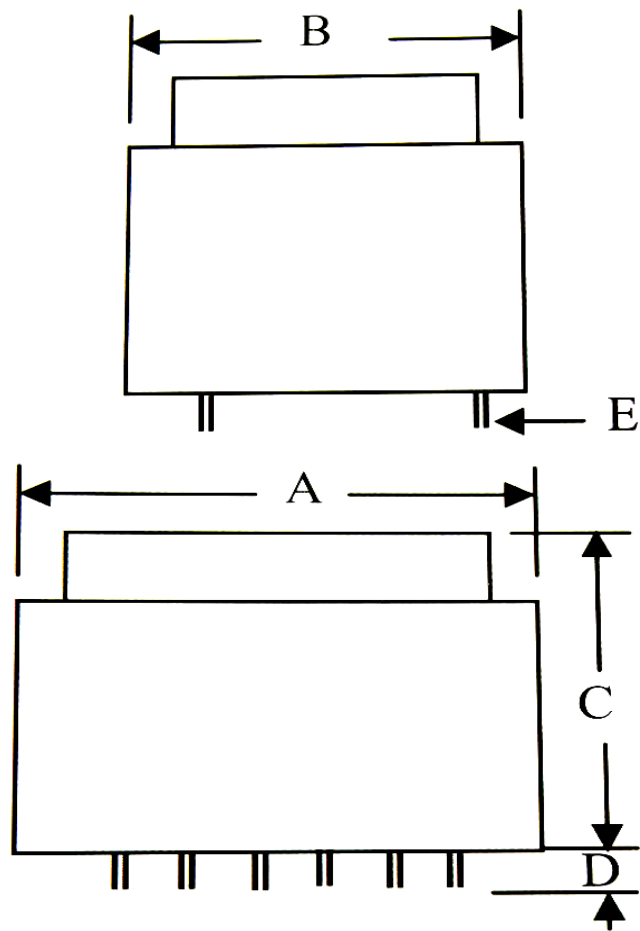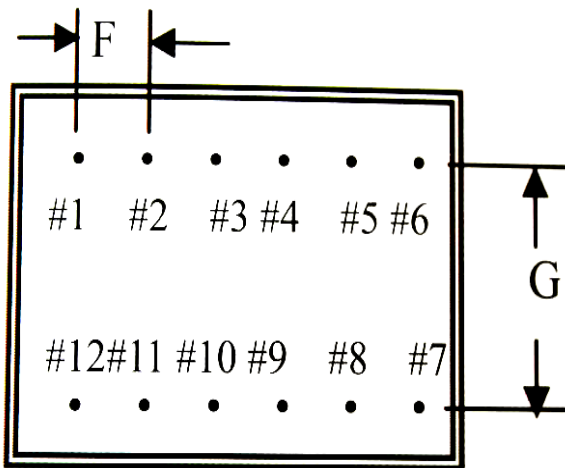

Single Output

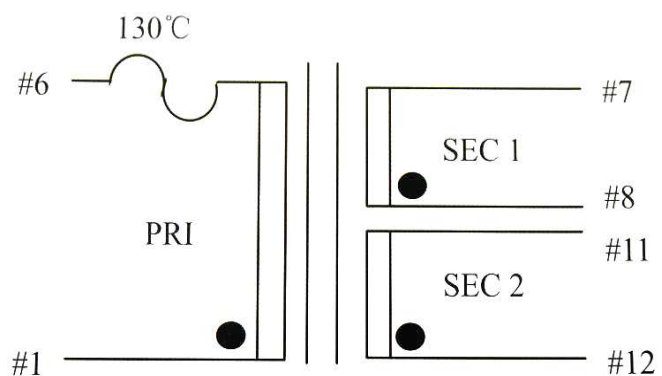


Dual Output

Standard PCB Encapsulated Transformer


# EDCON-COMPONENTS

## 8,0VA Standard PCB Encapsulated -Transformer



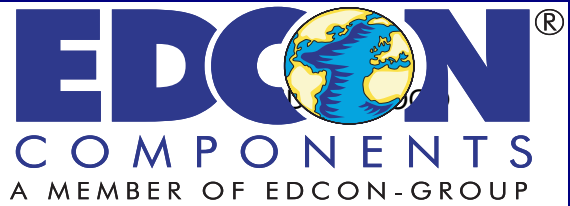


### Technical specifications


Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

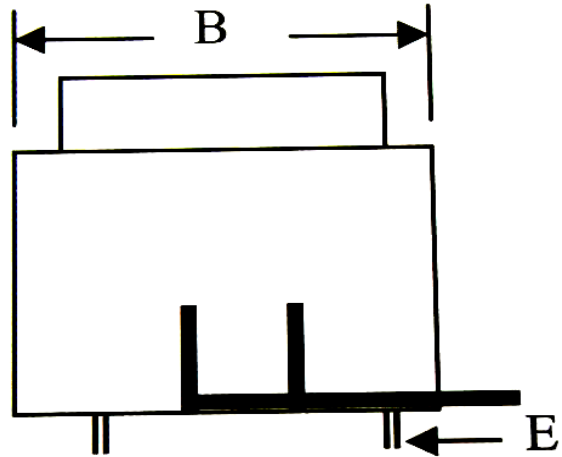

### Technical drawing

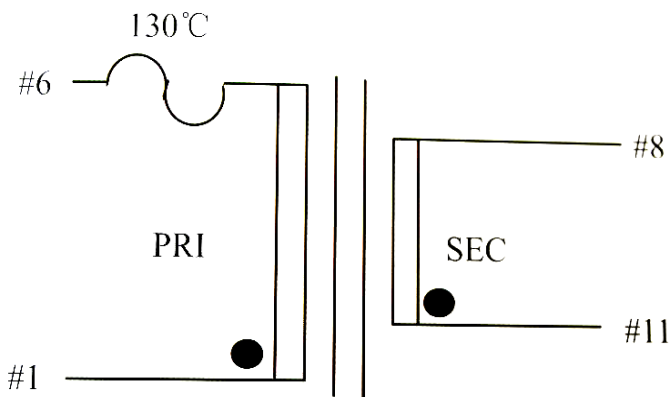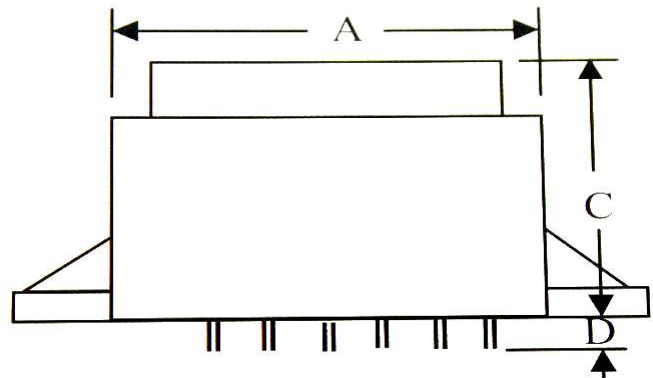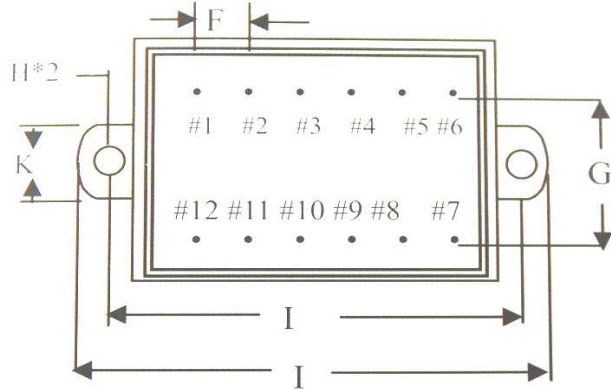

Single Output

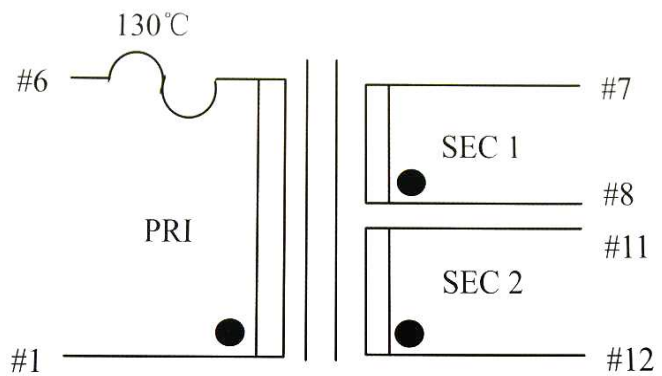


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 8,0VA Standard PCB Encapsulated -Transformer

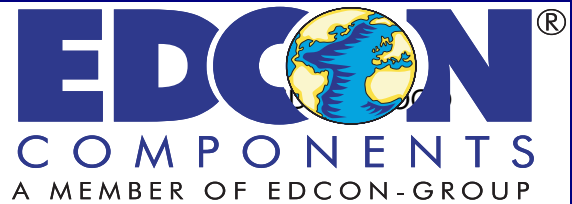

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
<b>8,0 (VA)</b>	53,0	45,0	35,5	4,0	0,64*0,64	5,0	27,5
Toler. (mm)	Max.	Max.	Max.	./-1,0	./-0,1	./-0,2	./-0,5
	H	I	J	K			
	4,2	67,0	60,5	10,0			
Toler. (mm)	./-0,2	Max.	./-0,5	./-0,5			

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
<b>V11017</b>	<b>48</b>	<b>S</b>	<b>060</b>	<b>M</b>

<b>S</b> = Single Output for 230VAC	<b>060</b> = 6V <b>072</b> = 7,2V <b>090</b> = 6V <b>100</b> = 10V	Empty W/O Mounting ear
<b>US</b> = Single Output for 115VAC	<b>120</b> = 12V <b>150</b> = 15V <b>180</b> = 18V <b>240</b> = 24V	<b>M</b> = with Mounting ears

6V = 1333mA
7,2V = 1111mA
9V = 888mA
10V = 800mA
12V = 666mA
15V = 533mA
18V = 444mA
24V = 333mA

Standard PCB Encapsulated Transformer