


EDCON-COMPONENTS






10VA Standard PCB Encapsulated -Transformer

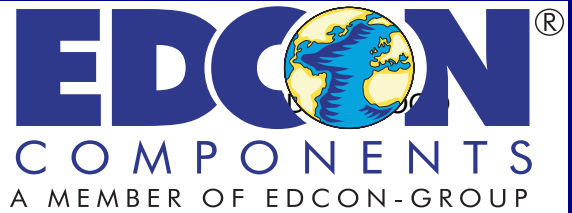

Technical specifications

Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

Technical drawing

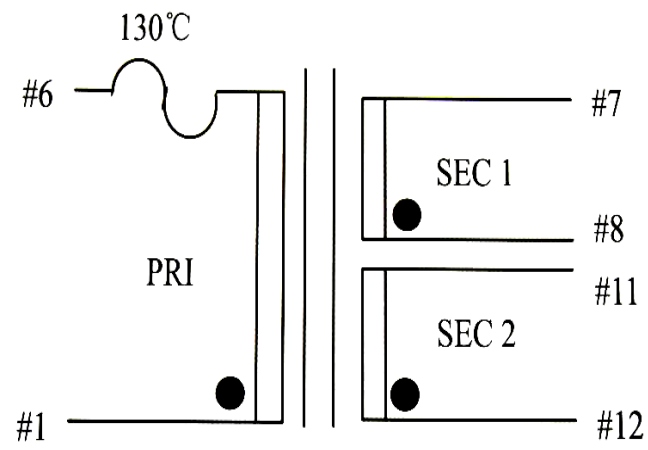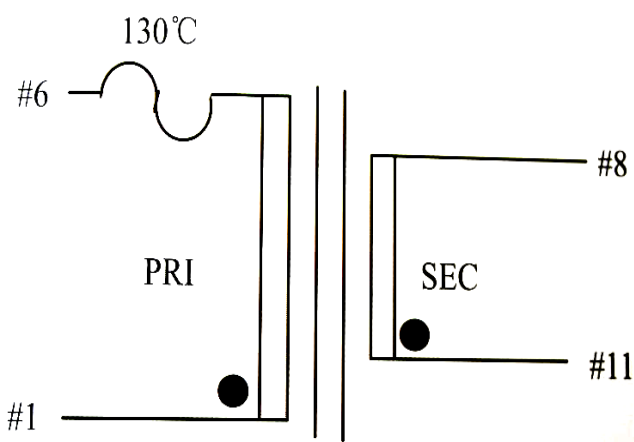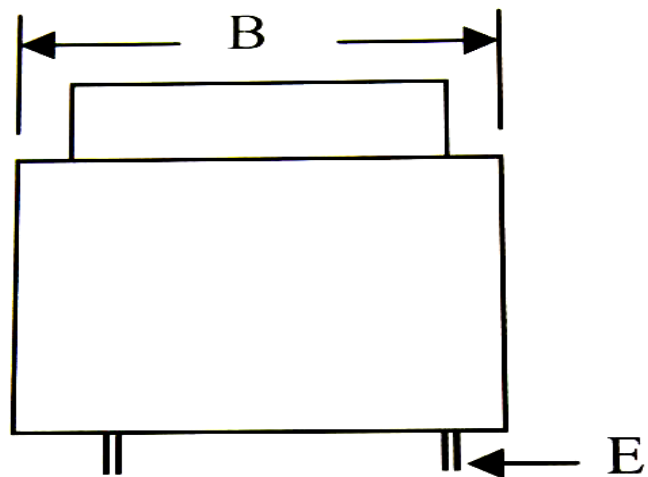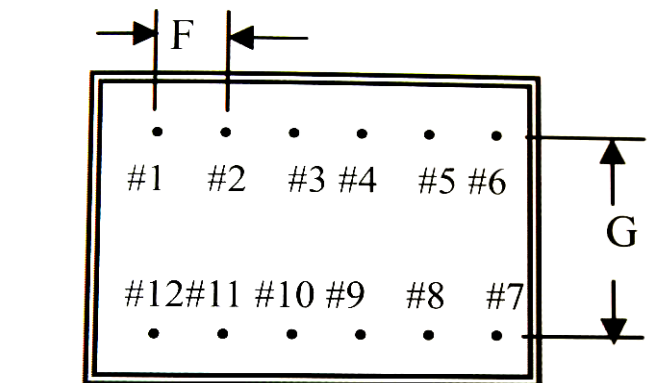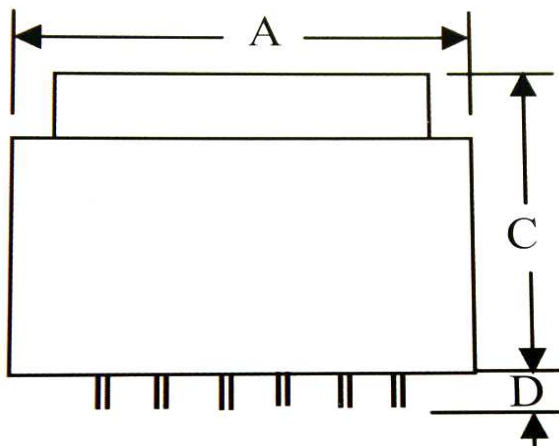


Single Output

Dual Output

Standard PCB Encapsulated Transformer


EDCON-COMPONENTS

10VA Standard PCB Encapsulated -Transformer



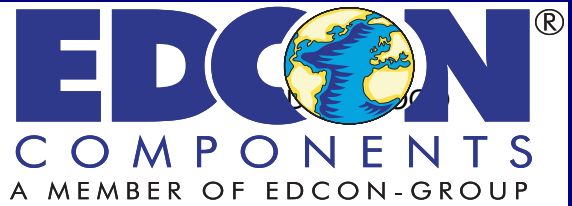


Technical specifications


Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

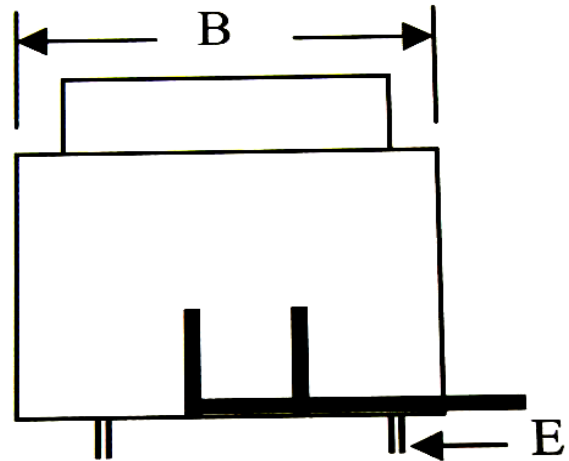

Technical drawing

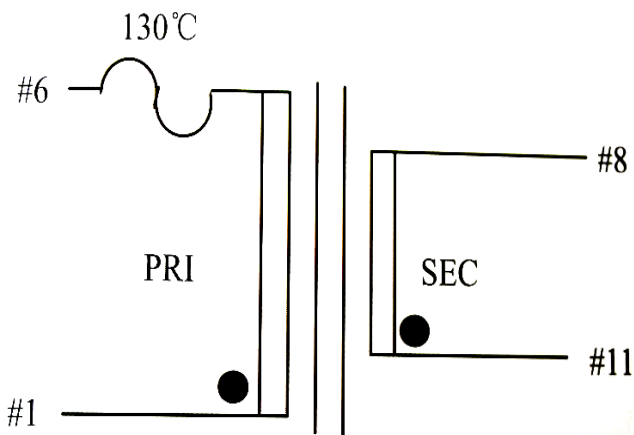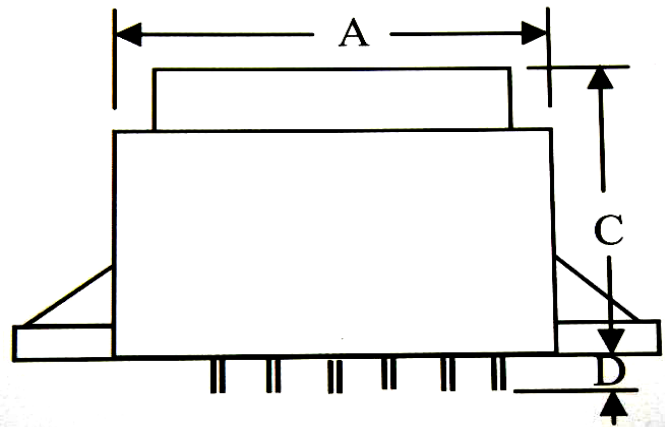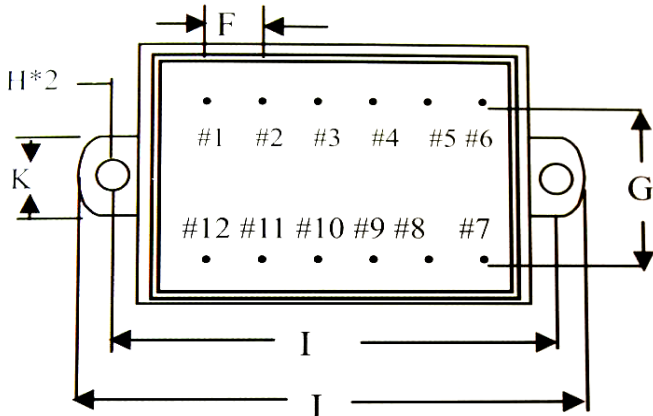

Single Output

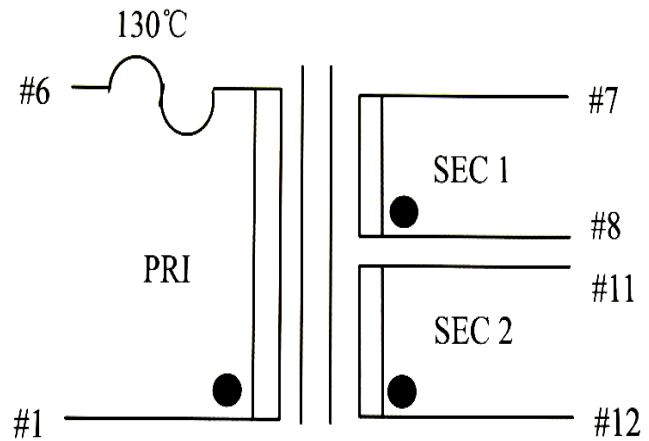


Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

10VA Standard PCB Encapsulated -Transformer

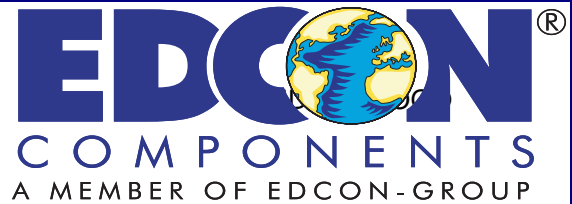

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
10 (VA)	53,0	45,0	35,5	4,0	0,64*0,64	5,0	27,5
Toler. (mm)	Max.	Max.	Max.	.+/-1,0	.+/-0,1	.+/-0,2	.+/-0,5
	H	I	J	K			
	4,2	59,0	52,5	10,0			
Toler. (mm)	.-+/-0,2	Max.	.-+/-0,5	.-+/-0,5			

Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
V11018	48	S	060	M

S = Single Output for 230VAC	060 = 6V 072 = 7,2V 090 = 9V 100 = 10V	Empty W/O Mounting ear
US = Single Output for 115VAC	120 = 12V 150 = 15V 180 = 18V 240 = 24V	M = with Mounting ears

6V = 1666mA
7,2V = 1388mA
9V = 1111mA
10V = 1000mA
12V = 833mA
15V = 666mA
18V = 555mA
24V = 416mA

Standard PCB Encapsulated Transformer