



EDCON-COMPONENTS

30VA Standard PCB Encapsulated -Transformer



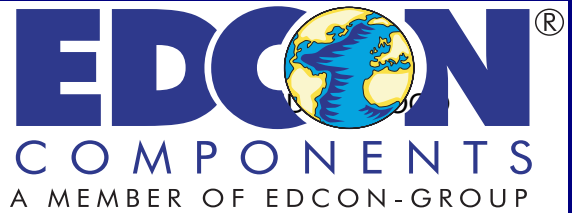


Technical specifications


Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

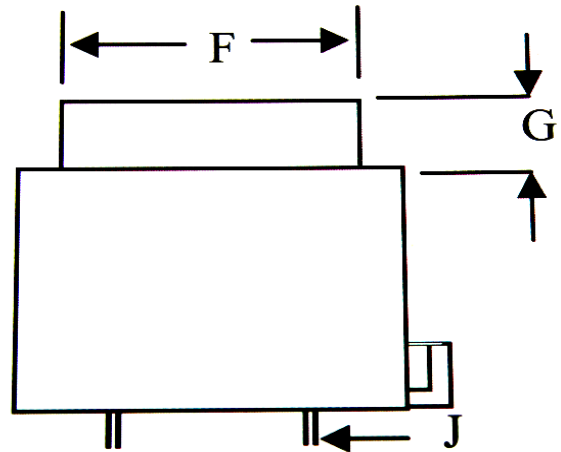

Technical drawing

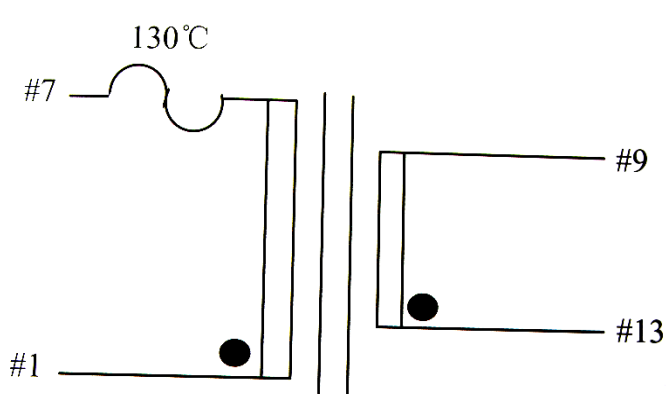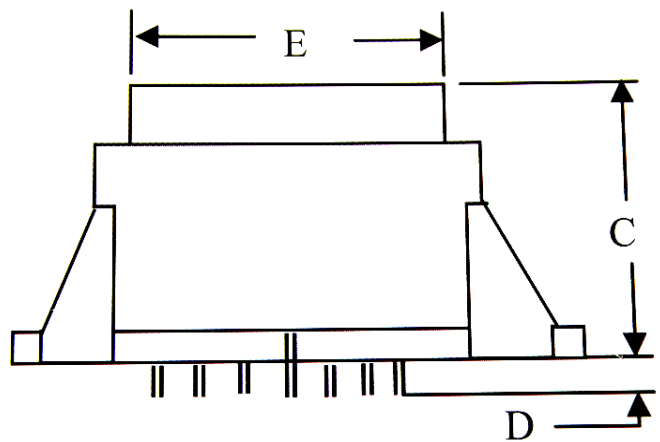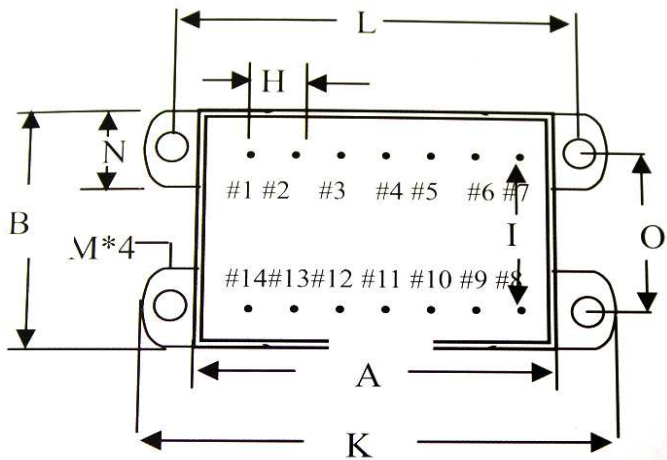

Single Output

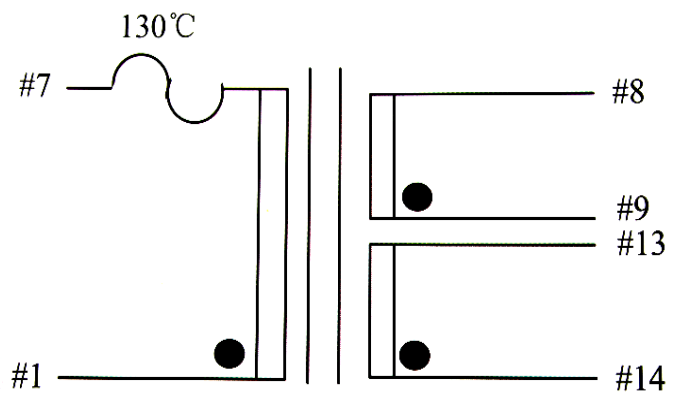


Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

30VA Standard PCB Encapsulated -Transformer

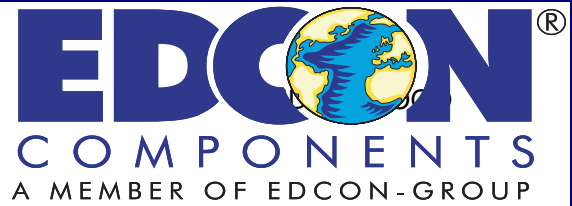

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
30 (VA)	72,5	61,0	50,0	4,0	0,8	5,0	35,0
Toler. (mm)	Max.	Max.	Max.	./-1,0	./-0,1	./-0,2	./-0,5
	H	I	J	K	L		
	4,2	88,0	77,5	10,8	47,5		
Toler. (mm)	./-0,2	Max.	./-0,5	./-0,5	./-0,5		

Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
V11027	66	S	060	M

S= Single Output for 230VAC US= Single Output for 115VAC	060 = 6V 072 = 7,2V 090 = 9V 100 = 10V 120 = 12V 150 = 15V 180 = 18V 240 = 24V	Empty W/O Mounting ear M= with Mounting ears
---	---	--

6V = 5000mA
7,2V = 4166mA
9V = 3333mA
10V = 3000mA
12V = 2500mA
15V = 2000mA
18V = 1666mA
24V = 1250mA

Standard PCB Encapsulated Transformer