


EDCON-COMPONENTS






2,1VA Standard PCB Encapsulated -Transformer

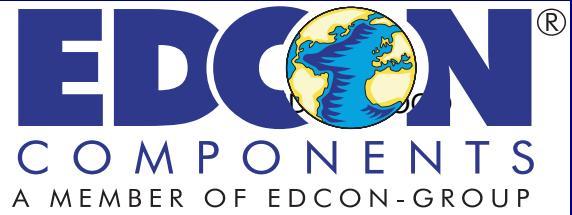

Technical specifications

Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

Technical drawing

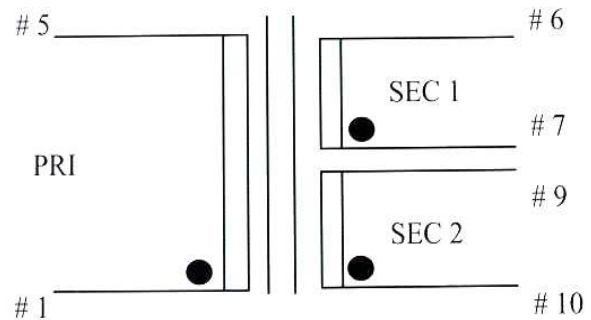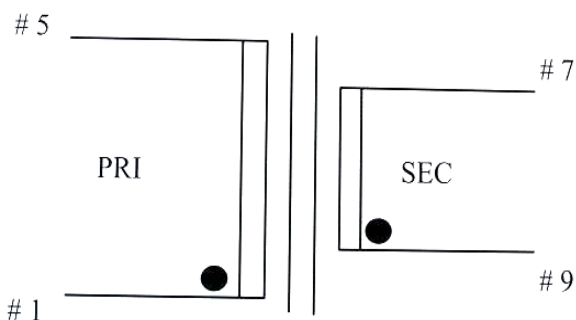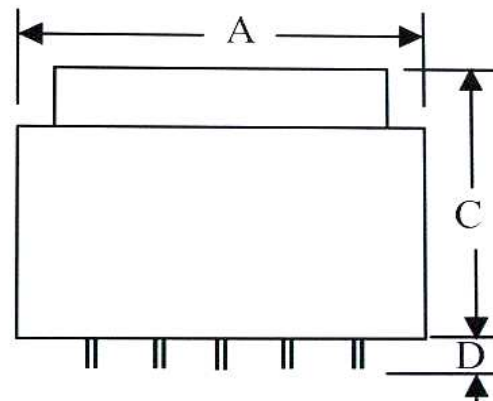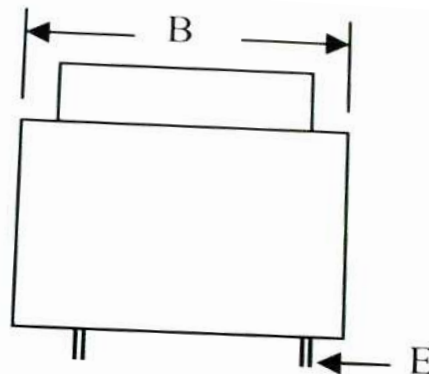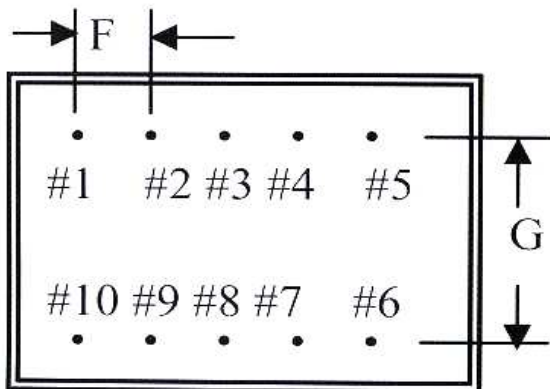


Single Output

Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

2,1VA Standard PCB Encapsulated -Transformer

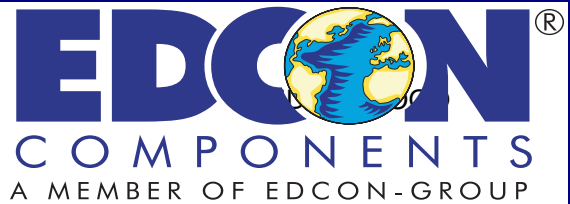

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
2,1 (VA)	33,0	27,8	27,8	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

Ordering Informations

Serie	Core	Output Layer	Output Voltage
V11035	30	D	060

D= Single Output for 230VAC	060 = 6V 072 = 7,2V 090 = 9V 100 = 10V 120 = 12V 150 = 15V 180 = 18V 240 = 24V
DS= Single Output for 115VAC	

2x6V = 2x175mA
 2x7,2V = 2x146mA
 2x9V = 2x117mA
 2x10V = 2x105mA
 2x12V = 2x88mA
 2x15V = 2x70mA
 2x18V = 2x59mA
 2x24V = 2x44mA

Standard PCB Encapsulated Transformer