


# EDCON-COMPONENTS





## 2,3VA Standard PCB Encapsulated -Transformer

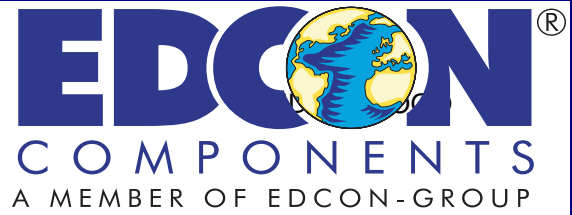


### Technical specifications

Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

### Technical drawing

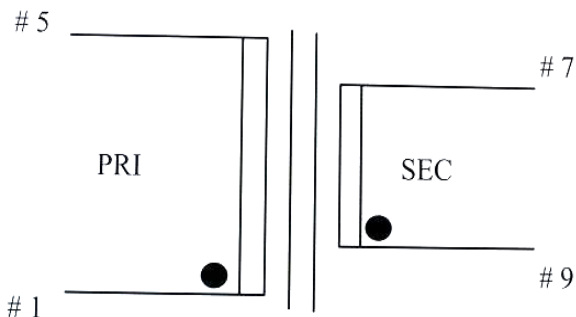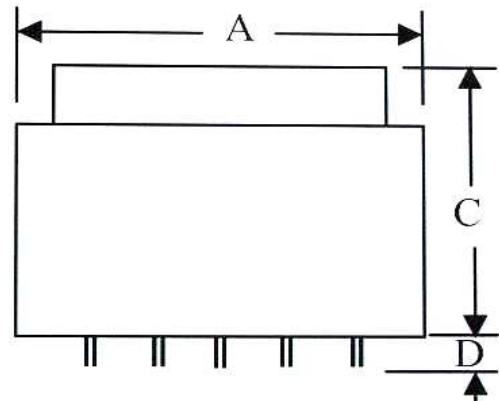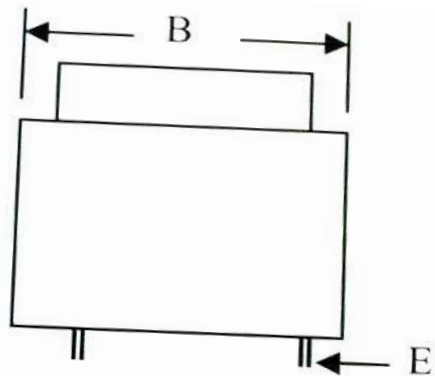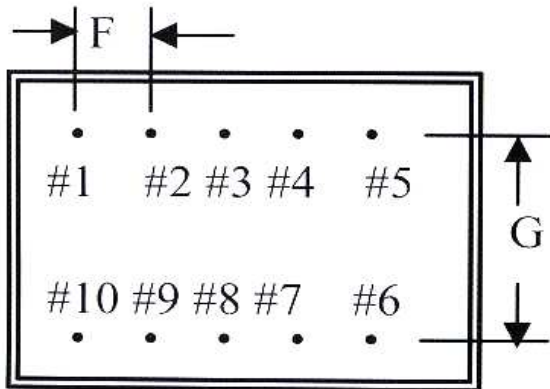

Single Output

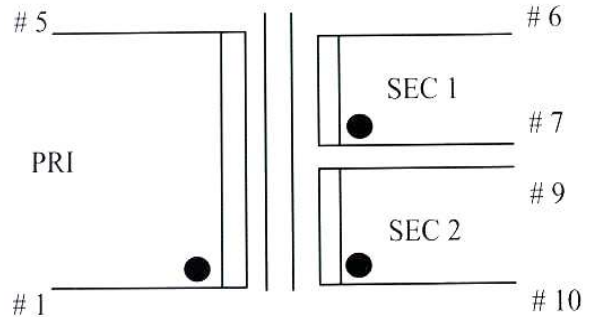


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 2,3VA Standard PCB Encapsulated -Transformer

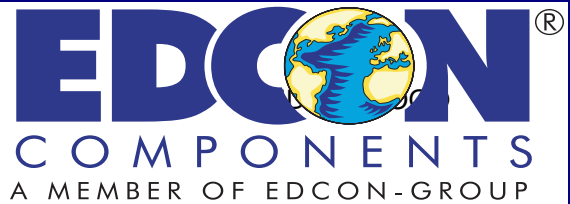

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
<b>2,3 (VA)</b>	33,0	27,8	29,8	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11036	30	D	060	

<b>D=</b> Single Output for 230VAC	<b>060</b> = 6V <b>072</b> = 7,2V <b>090</b> = 9V <b>100</b> = 10V <b>120</b> = 12V <b>150</b> = 15V <b>180</b> = 18V <b>240</b> = 24V
<b>DS=</b> Single Output for 115VAC	

2x6V = 2x191mA
2x7,2V = 2x159mA
2x9V = 2x127mA
2x10V = 2x115mA
2x12V = 2x95mA
2x15V = 2x76mA
2x18V = 2x63mA
2x24V = 2x48mA

Standard PCB Encapsulated Transformer