


EDCON-COMPONENTS






2,4VA Standard PCB Encapsulated -Transformer

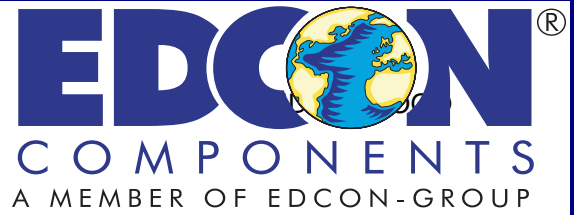

Technical specifications

Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

Technical drawing

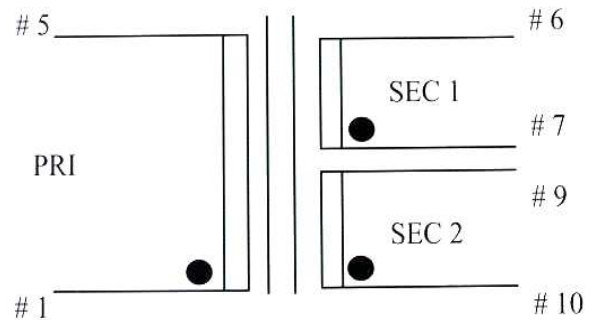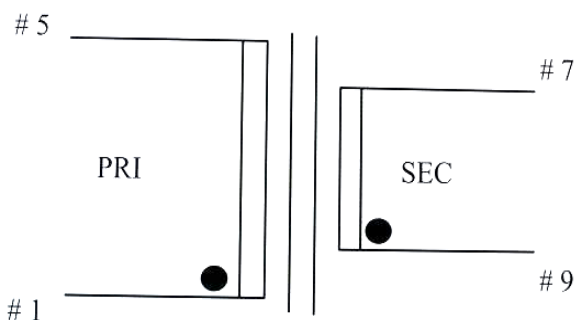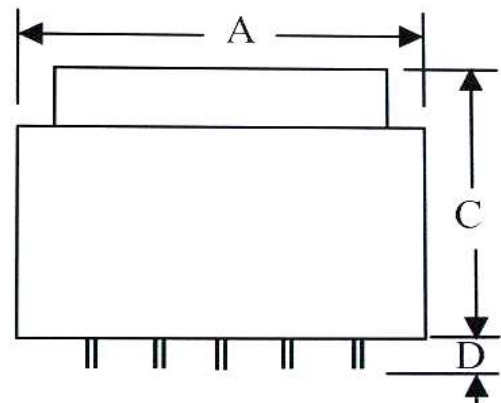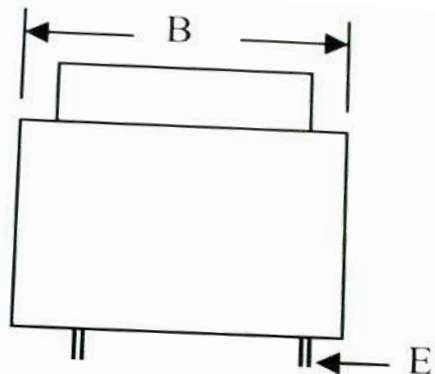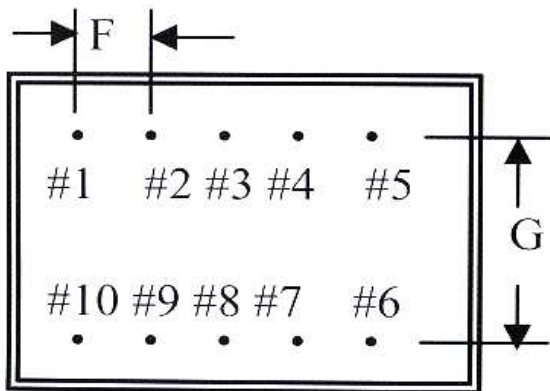


Single Output

Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

2,4VA Standard PCB Encapsulated -Transformer

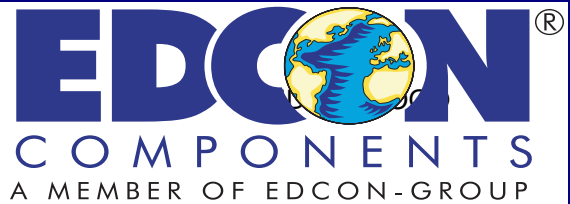

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
2,4 (VA)	33,0	27,8	29,8	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11037	30	D	060	

D= Single Output for 230VAC	060 = 6V
	072 = 7,2V
	090 = 9V
	100 = 10V
DS= Single Output for 115VAC	120 = 12V
	150 = 15V
	180 = 18V
	240 = 24V

2x6V = 2x200mA
 2x7,2V = 2x167mA
 2x9V = 2x134mA
 2x10V = 2x120mA
 2x12V = 2x100mA
 2x15V = 2x80mA
 2x18V = 2x67mA
 2x24V = 2x50mA

Standard PCB Encapsulated Transformer