


# EDCON-COMPONENTS






## 2,8VA Standard PCB Encapsulated -Transformer

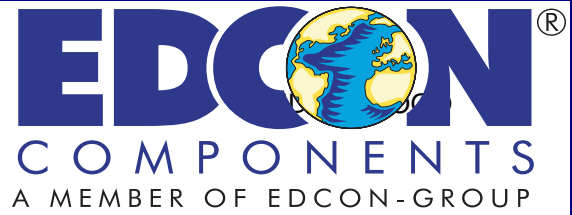

### Technical specifications

Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

### Technical drawing

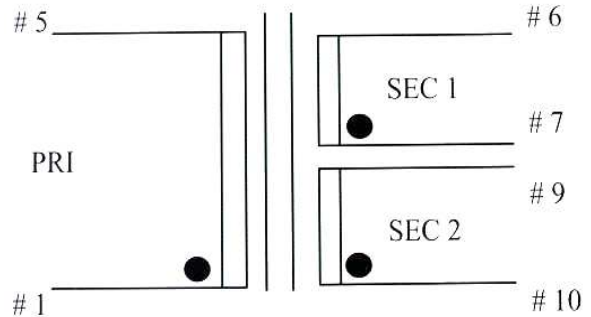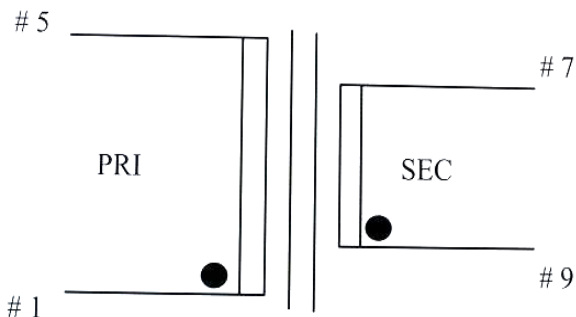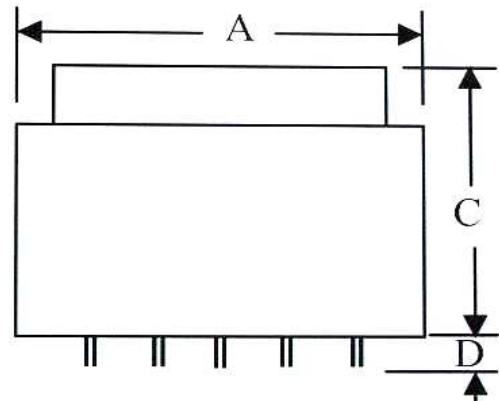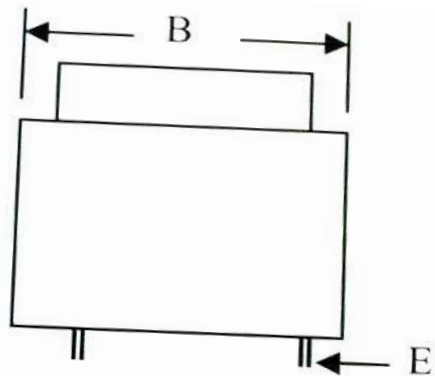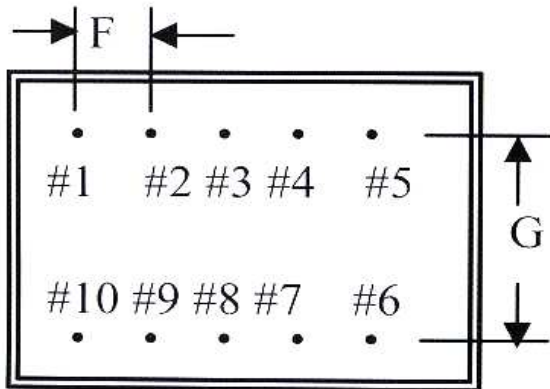


Single Output

Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 2,8VA Standard PCB Encapsulated -Transformer

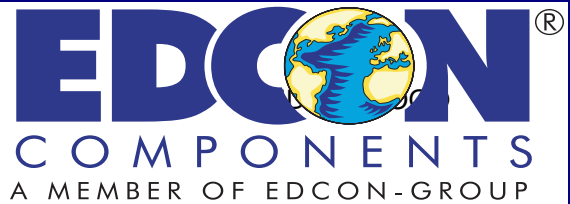

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
<b>2,8 (VA)</b>	33,0	27,8	29,8	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	
<b>V11039</b>	<b>30</b>	<b>D</b>	<b>060</b>	

<b>D=</b> Single Output for 230VAC	<b>060</b> = 6V
	<b>072</b> = 7,2V
	<b>090</b> = 9V
	<b>100</b> = 10V
	<b>120</b> = 12V
<b>DS=</b> Single Output for 115VAC	<b>150</b> = 15V
	<b>180</b> = 18V
	<b>240</b> = 24V

2x6V = 2x233mA
2x7,2V = 2x194mA
2x9V = 2x155mA
2x10V = 2x140mA
2x12V = 2x116mA
2x15V = 2x93mA
2x18V = 2x77mA
2x24V = 2x58mA

Standard PCB Encapsulated Transformer