


# EDCON-COMPONENTS






## 3,0VA Standard PCB Encapsulated -Transformer

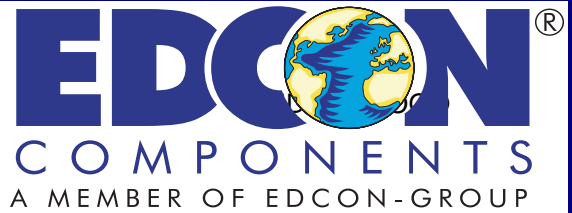

### Technical specifications

Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

### Technical drawing

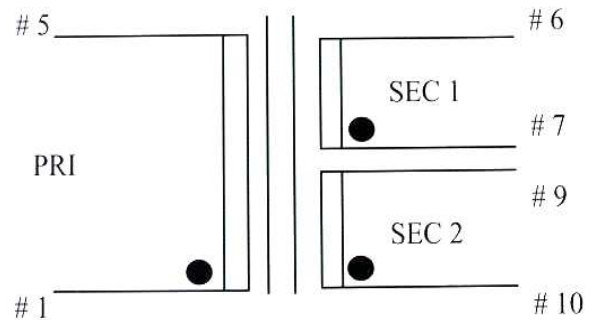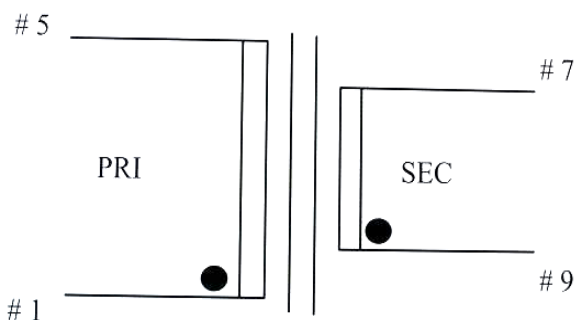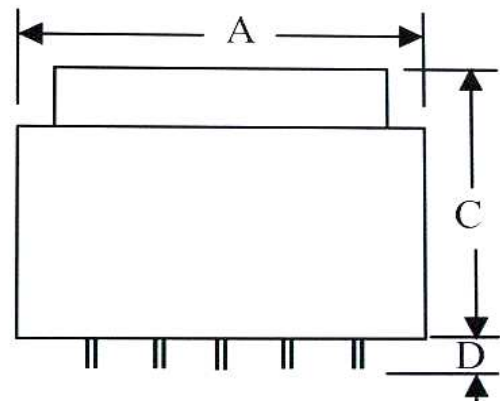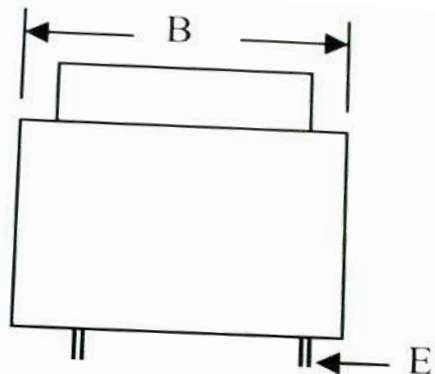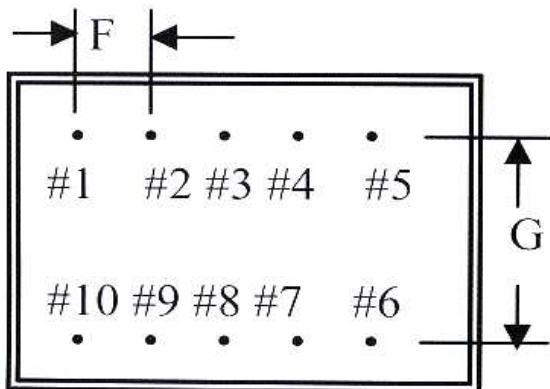


Single Output

Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 3,0VA Standard PCB Encapsulated -Transformer

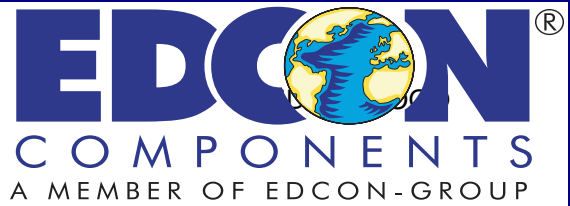

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
3,0 (VA)	33,0	27,8	35,0	4,0	0,8	5,0	20,0
Toler. (mm)	./-0,5	./-0,8	./-0,5	./-1,0	./-0,1	./-0,2	./-0,5

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	
V11040	30	S	060	

D= Single Output for 230VAC	060 = 6V
	072 = 7,2V
	090 = 9V
	100 = 10V
DS= Single Output for 115VAC	120 = 12V
	150 = 15V
	180 = 18V
	240 = 24V

2x6V = 2x250mA
2x7,2V = 2x208mA
2x9V = 2x166mA
2x10V = 2x150mA
2x12V = 2x125mA
2x15V = 2x100mA
2x18V = 2x83mA
2x24V = 2x62mA

Standard PCB Encapsulated Transformer