



EDCON-COMPONENTS

4,0VA Standard PCB Encapsulated -Transformer


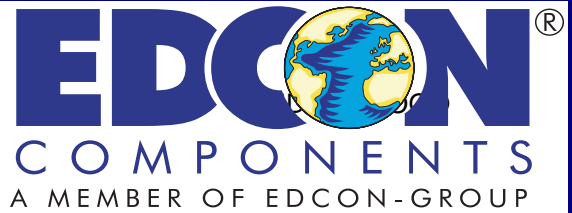


Technical specifications


Power from 0,6VA to 36VA
 Dielectric Strength - 3750 Vrms
 High ambient operation temperature (+75°C)
 Primary (115V 60HZ / 230V/50Hz)
 Secondary Single or Dual Output
 Insulation Class - Class B (130°C)
 Safety Approvals VDE / CE

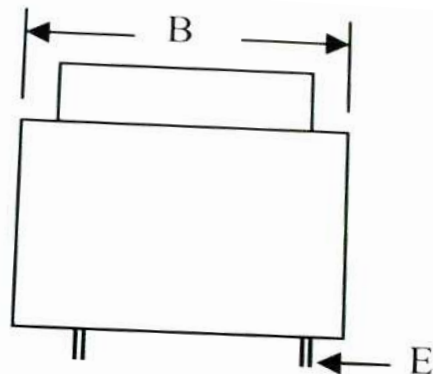


Technical drawing

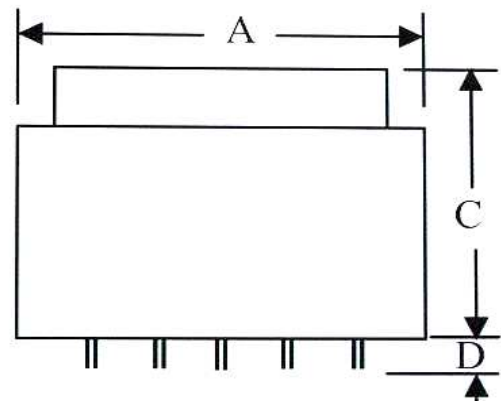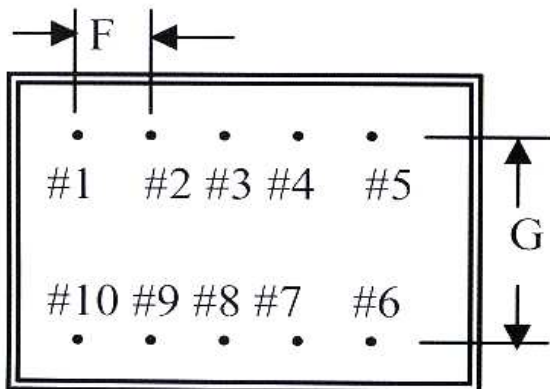

Empty pin shall be omitted if necessary.

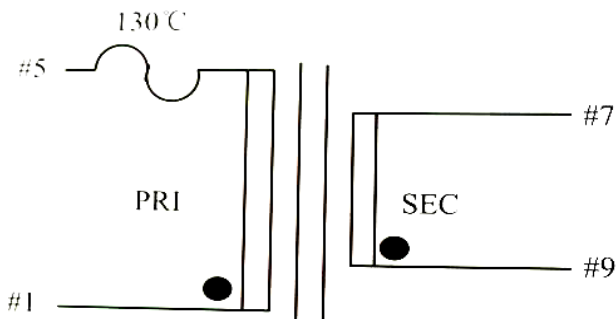

Single Output

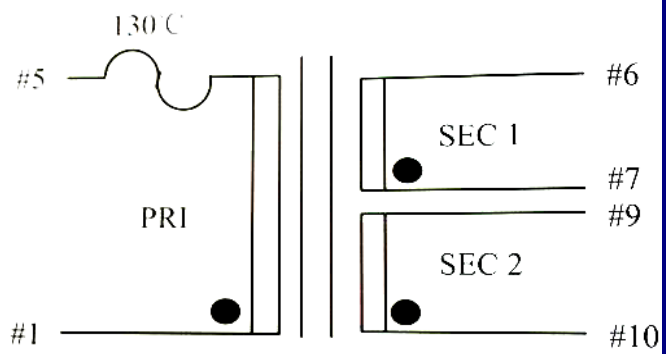


Dual Output

Standard PCB Encapsulated Transformer

EDCON-COMPONENTS

4,0VA Standard PCB Encapsulated -Transformer

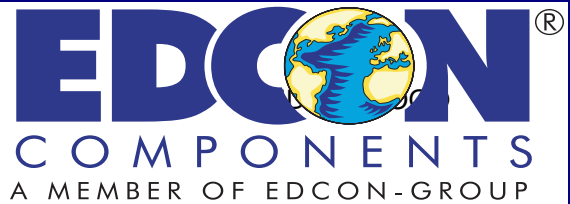

Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
4,0 (VA)	41,5	35,5	28,5	4,0	0,64*0,64	5,0	25,0
Toler. (mm)	max.	max.	max.	./-1,0	./-0,1	./-0,2	./-0,5

Ordering Informations

Serie	Core	Output Layer	Output Voltage
V11042	38	D	060

D= Single Output for 230VAC

060 = 6V
072 = 7,2V
090 = 9V
100 = 10V
120 = 12V
150 = 15V
180 = 18V
240 = 24V

DS= Single Output for 115VAC

2x6V = 2x333mA
2x7,2V = 2x278mA
2x9V = 2x222mA
2x10V = 2x200mA
2x12V = 2x166mA
2x15V = 133mA
2x18V = 2x111mA
2x24V = 2x84mA

Standard PCB Encapsulated Transformer