


# EDCON-COMPONENTS






## 10VA Standard PCB Encapsulated -Transformer

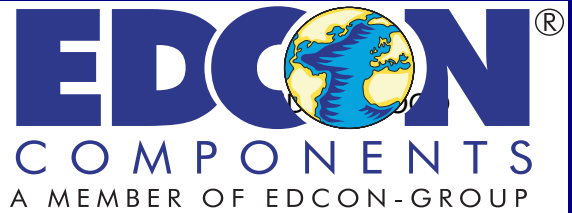

### Technical specifications

- Power from 0,6VA to 36VA
- Dielectric Strength - 3750 Vrms
- High ambient operation temperature (+75°C)
- Primary ( 115V 60HZ / 230V/50Hz )
- Secondary Single or Dual Output
- Insulation Class - Class B ( 130°C )
- Safety Approvals VDE / CE

### Technical drawing

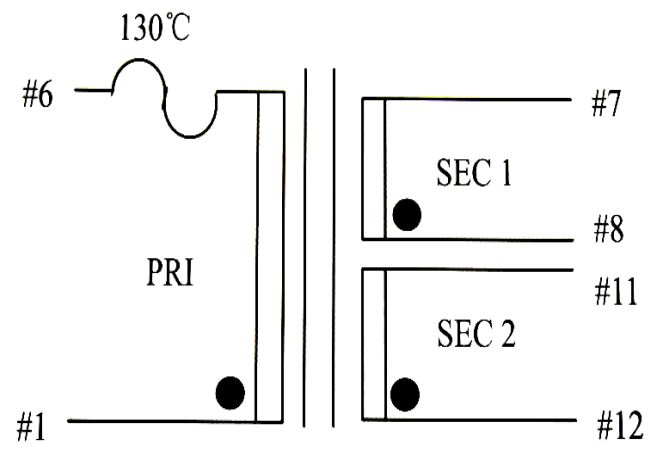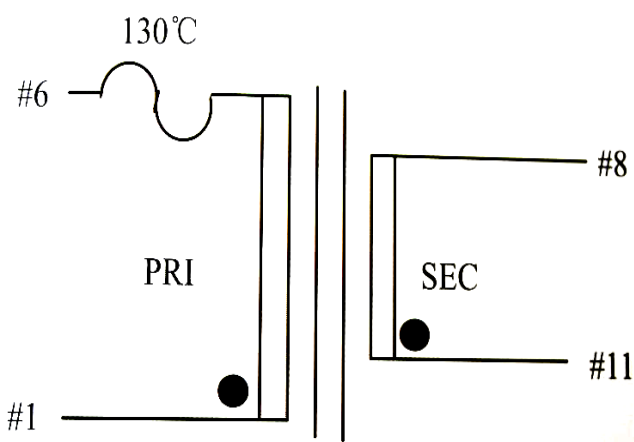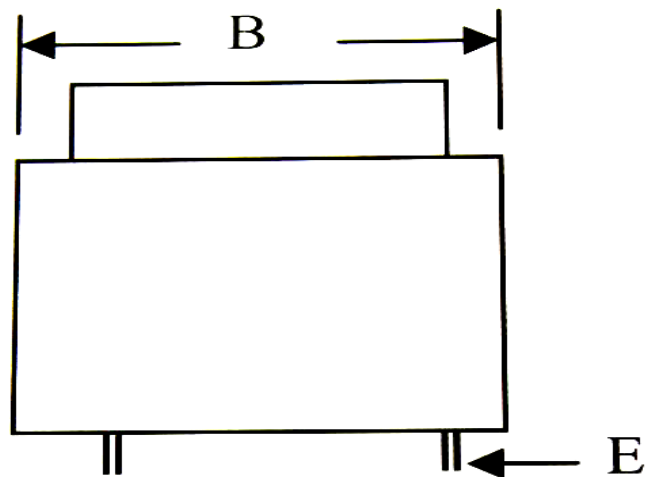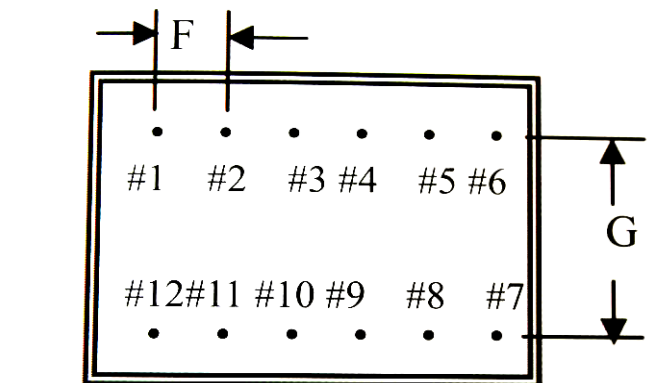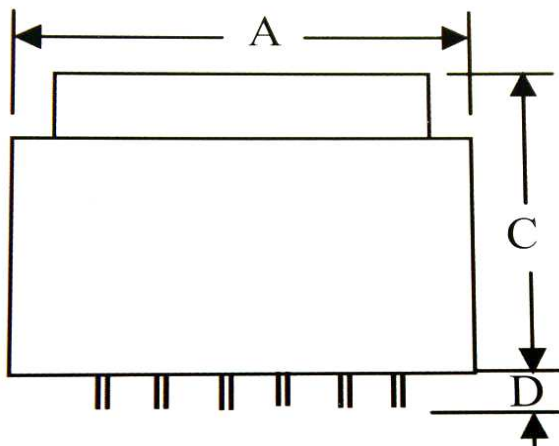


Single Output

Dual Output

Standard PCB Encapsulated Transformer


# EDCON-COMPONENTS

## 10VA Standard PCB Encapsulated -Transformer



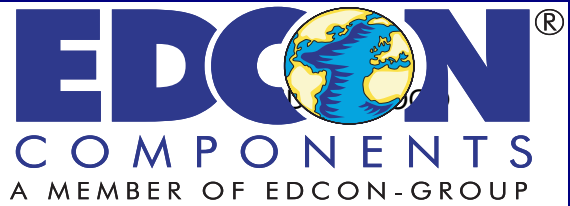


### Technical specifications


Power from 0,6VA to 36VA  
 Dielectric Strength - 3750 Vrms  
 High ambient operation temperature (+75°C)  
 Primary ( 115V 60HZ / 230V/50Hz )  
 Secondary Single or Dual Output  
 Insulation Class - Class B ( 130°C )  
 Safety Approvals VDE / CE

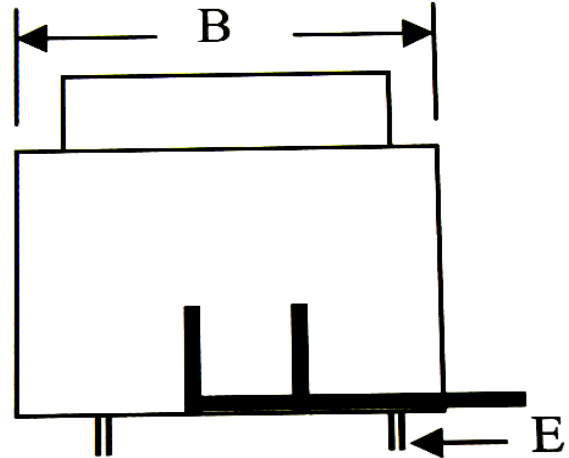

### Technical drawing

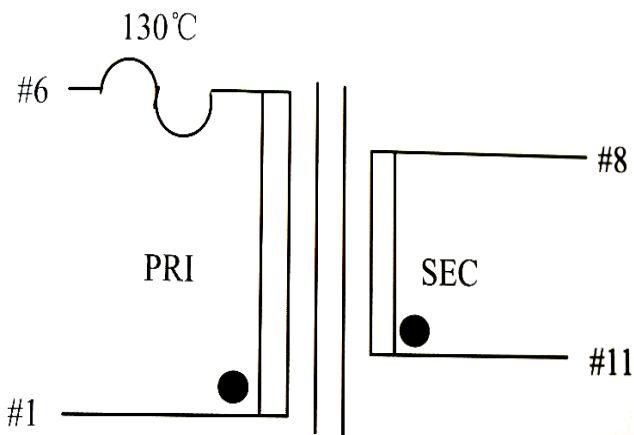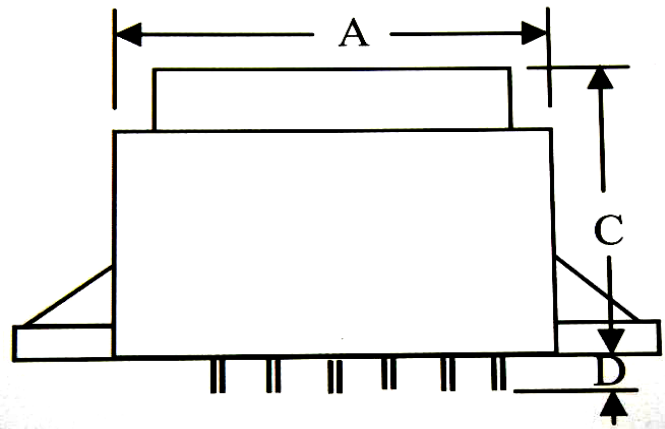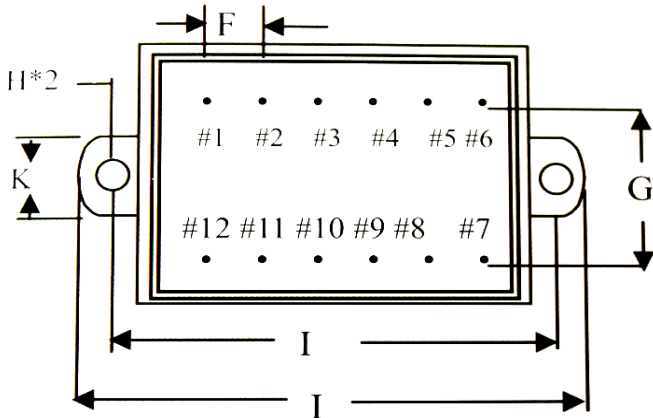

Single Output

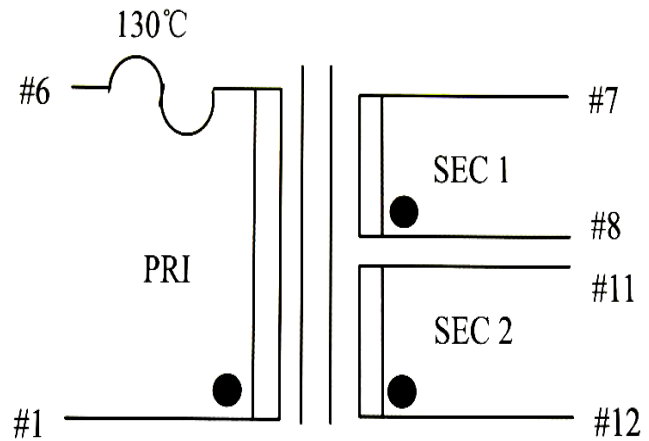


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 10VA Standard PCB Encapsulated -Transformer

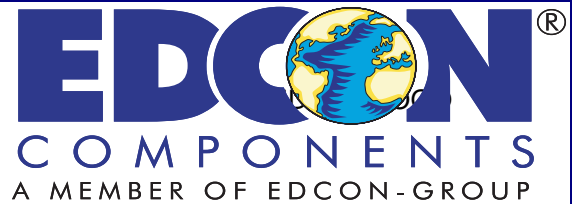

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
<b>10 (VA)</b>	53,0	45,0	35,5	4,0	0,64*0,64	5,0	27,5
Toler. (mm)	Max.	Max.	Max.	./-1,0	./-0,1	./-0,2	./-0,5
	H	I	J	K			
	4,2	59,0	52,5	10,0			
Toler. (mm)	./-0,2	Max.	./-0,5	./-0,5			

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
<b>V11046</b>	<b>48</b>	<b>D</b>	<b>060</b>	<b>M</b>

<b>D=</b> Single Output for 230VAC	<b>060</b> = 6V <b>072</b> = 7,2V <b>090</b> = 9V <b>100</b> = 10V	Empty W/O Mounting ear
<b>DS=</b> Single Output for 115VAC	<b>120</b> = 12V <b>150</b> = 15V <b>180</b> = 18V <b>240</b> = 24V	<b>M=</b> with Mounting ears

2x6V = 2x833mA  
 2x7,2V = 2x694mA  
 2x9V = 2x555mA  
 2x10V = 2x500mA  
 2x12V = 2x416mA  
 2x15V = 2x333mA  
 2x18V = 2x275mA  
 2x24V = 2x213mA

Standard PCB Encapsulated Transformer