



# EDCON-COMPONENTS

## 36VA Standard PCB Encapsulated -Transformer



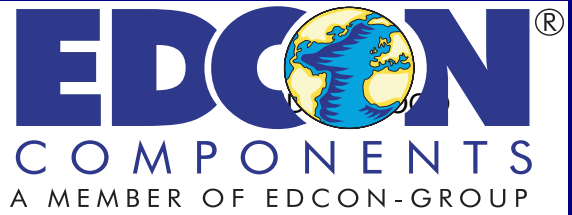


### Technical specifications


- Power from 0,6VA to 36VA
- Dielectric Strength - 3750 Vrms
- High ambient operation temperature (+75°C)
- Primary ( 115V 60HZ / 230V/50Hz )
- Secondary Single or Dual Output
- Insulation Class - Class B ( 130°C )
- Safety Approvals VDE / CE

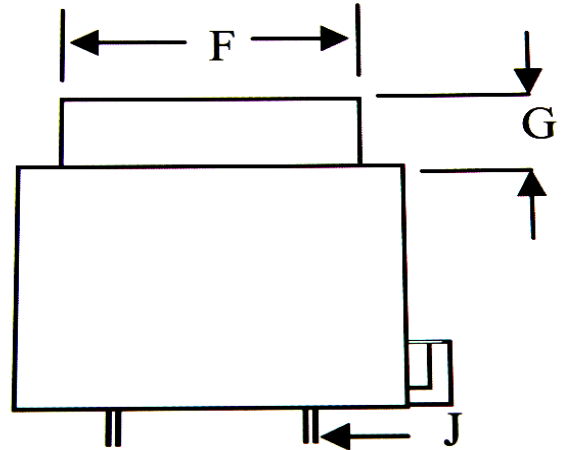

### Technical drawing

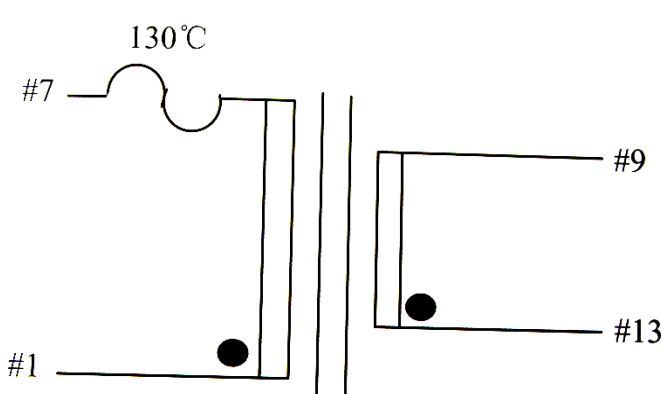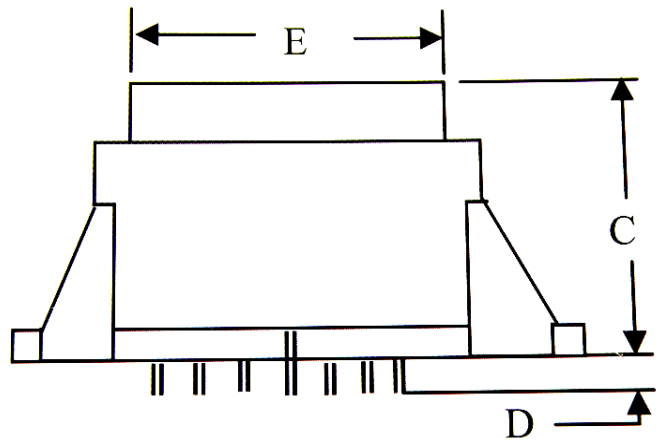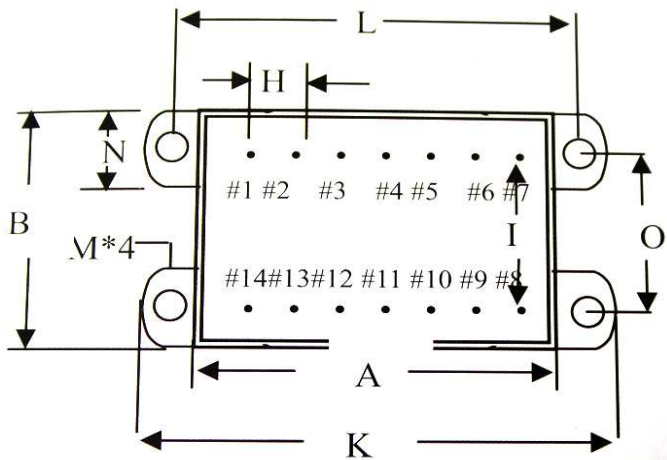

Single Output

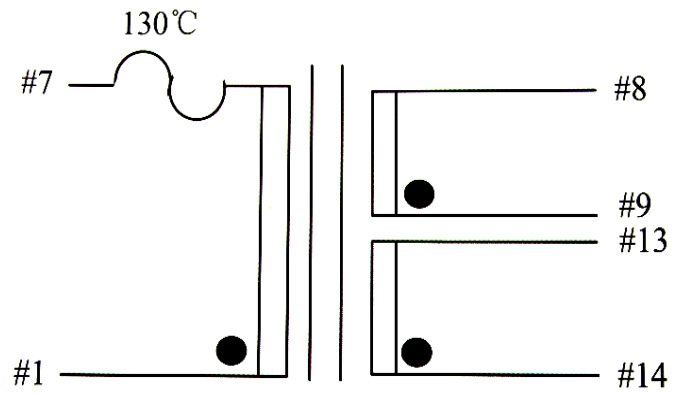


Dual Output

Standard PCB Encapsulated Transformer

# EDCON-COMPONENTS

## 36VA Standard PCB Encapsulated -Transformer

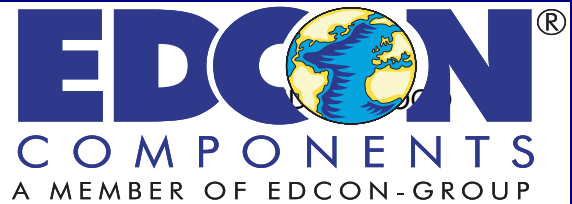

### Technical dimensions

Serie	Dimensions (mm)						
	A	B	C	D	E	F	G
36 (VA)	72,5	61,0	50,0	4,0	0,8	5,0	35,0
Toler. (mm)	Max.	Max.	Max.	./-1,0	./-0,1	./-0,2	./-0,5
	H	I	J	K	L		
	4,2	88,0	77,5	10,8	47,5		
Toler. (mm)	./-0,2	Max.	./-0,5	./-0,5	./-0,5		

### Ordering Informations

Serie	Core	Output Layer	Output Voltage	Mounting Ear
V11056	66	D	060	M

<b>D=</b> Single Output for 230VAC	<b>060</b> = 6V <b>072</b> = 7,2V <b>090</b> = 9V <b>100</b> = 10V <b>120</b> = 12V <b>150</b> = 15V <b>180</b> = 18V <b>240</b> = 24V	Empty W/O Mounting ear
<b>DS=</b> Single Output for 115VAC		<b>M=</b> with Mounting ears

2x6V = 2x3000mA  
 2x7,2V = 2x2500mA  
 2x9V = 2x2000mA  
 2x10V = 2x1800mA  
 2x12V = 2x1500mA  
 2x15V = 2x1200mA  
 2x18V = 2x1000mA  
 2x24V = 2x750mA

Standard PCB Encapsulated Transformer