



## R48005-550

### Features:

Size Radial
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

### Technical Specifications:

**I<sub>h</sub>**= Hold current maximum current device will pass without interruption in 25° C still air unless

**I<sub>t</sub>**= Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

**V<sub>max</sub>**= Maximum Voltage device can withstand without damage at rated current

**V<sub>max. Interrupt</sub>**= Maximum interrupt voltage device can withstand without damage at current

**I<sub>max</sub>**= Maximum fault current device can withstand without damage at rated voltage.

**Time-TO-TRIP**= Maximum Time to trip (s) at assigned current.

**P<sub>d typ</sub>**= Typical Power dissipation : typical amount of power dissipated by the device when in state air environment

**R<sub>min</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>max</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>1max</sub>**= The maximum resistance of the device at 25°C 1hour after being tripped or after reflow soldering:

### Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature ( °C)								
	-.40	-.20	0	23	40	50	60	70	85
550mA	0,85	0,75	0,65	0,55	0,45	0,400	0,350	0,300	0,22

### Approval:



<b>Radial POLY FUSE 120Volt</b>	
Part No.:	<b>R48005-550</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




**Technical Drawing and Informations**

**Dimensions**

A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	<b>10,90</b>		<b>14,00</b>		<b>3,60</b>		<b>7,60</b>		<b>4,30 5,80</b>

**Type 2**

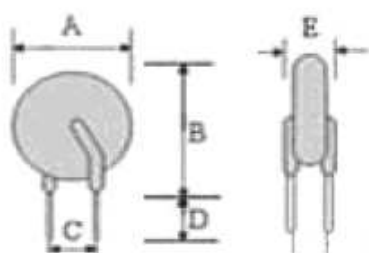

**Performance Rating:**

Range	ICH	IT	V max	I m ax	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Rmin (Ω)	Rmax (Ω)	R1max (Ω)
	<b>550mA</b>	<b>0,55</b>	<b>1,1</b>	<b>120,0</b>	<b>20,0</b>	<b>1,5</b>	<b>1,60</b>	<b>60,0</b>	<b>0,80</b>	<b>1,30</b>


<b>Radial POLY FUSE 120Volt</b>	
Part No.:	<b>R48005-550</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3




**Soldering Information**

**Lead Solder Performance**

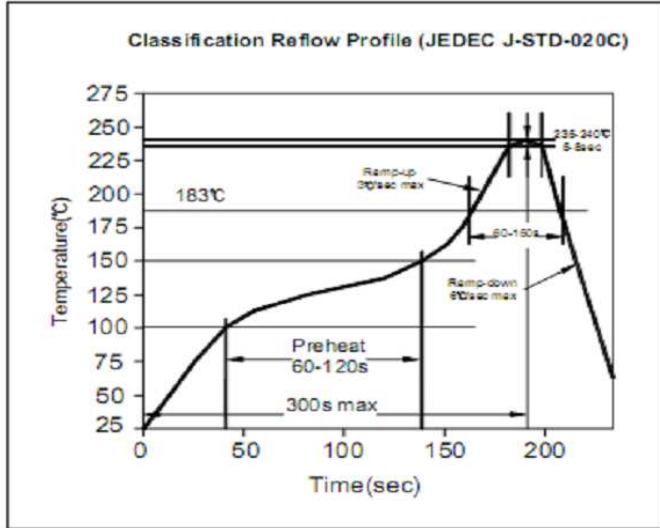

**Lead free Solder Performance**

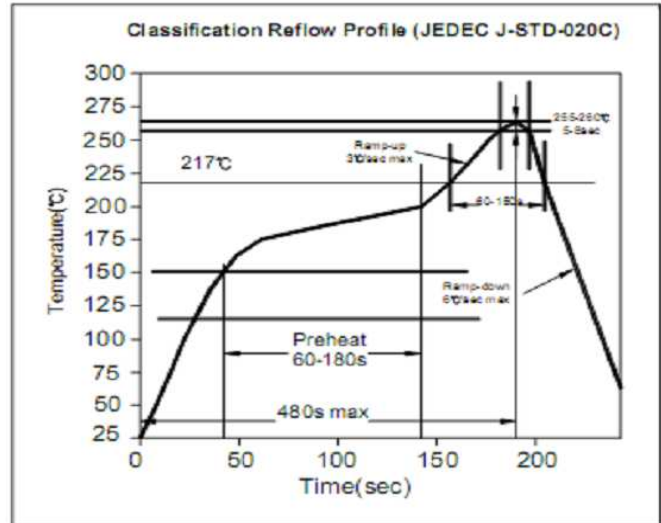

**Ordering Informations:**

Item-No. & Range	ROHS	Packing
------------------	------	---------

<b>R48005-550</b>	<b>R</b>	<b>BU</b>
-------------------	----------	-----------

**550 = 550mA**

<b>R= ROHS</b>	<b>BU= Bulk / Standard</b>
<b>N= Non ROHS</b>	<b>TR= Tape / Reel</b>

<b>Radial POLY FUSE 120Volt</b>	
Part No.:	<b>R48005-550</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3