



## R48006-125

### Features:

Size Radial
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

### Technical Specifications:

**I<sub>h</sub>**= Hold current maximum current device will pass without interruption in 25° C still air unless

**I<sub>t</sub>**= Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

**V<sub>max</sub>**= Maximum Voltage device can withstand without damage at rated current

**V<sub>max. Interrupt</sub>**= Maximum interrupt voltage device can withstand without damage at current

**I<sub>max</sub>**= Maximum fault current device can withstand without damage at rated voltage.

**Time-TO-TRIP**= Maximum Time to trip (s) at assigned current.

**P<sub>d typ</sub>**= Typical Power dissipation : typical amount of power dissipated by the device when in state air environment

**R<sub>min</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>max</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>1max</sub>**= The maximum resistance of the device at 25°C 1hour after being tripped or after reflow soldering:

### Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature ( °C)								
	-.40	-.20	0	23	40	50	60	70	85
1250mA		1,55	1,63	1,25	1,00	0,94	0,81	0,75	0,69

### Approval:



<b>Radial POLY FUSE 240Volt</b>	
Part No.:	<b>R48006-125</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




## Technical Drawing and Informations

### Dimensions

A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	<b>21,20</b>		<b>27,40</b>		<b>5,30</b>		<b>7,60</b>		<b>8,90 11,40</b>

### Type 2



## Performance Rating:

Range	ICH	IT	V max	I max	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Rmin (Ω)	Rmax (Ω)	R1max (Ω)
	<b>1250mA</b>	<b>1,25</b>	<b>2,50</b>	<b>240,0</b>	<b>12,5</b>	<b>3,3</b>	<b>6,25</b>	<b>23,0</b>	<b>0,17</b>	<b>0,18</b>

### Radial POLY FUSE 240Volt

Part No.: **R48006-125**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




**Soldering Information**

**Lead Solder Performance**

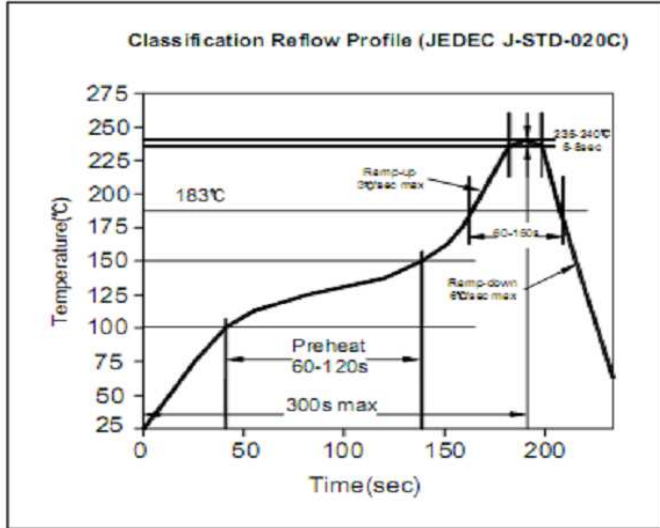

**Lead free Solder Performance**

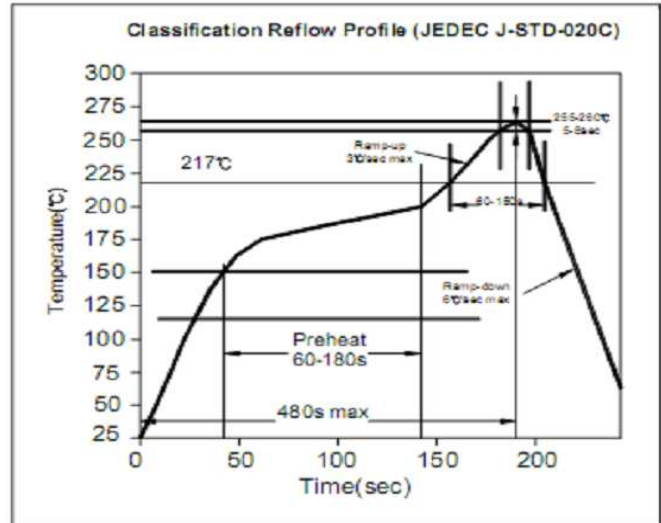

**Ordering Informations:**

Item-No. & Range	ROHS	Packing
------------------	------	---------

<b>R48006-125</b>	<b>R</b>	<b>BU</b>
-------------------	----------	-----------

**125 =**  
1250mA

<b>R=</b> ROHS	<b>BU=</b> Bulk / Standard
<b>N=</b> Non ROHS	<b>TR=</b> Tape / Reel

<b>Radial POLY FUSE 240Volt</b>	
Part No.:	<b>R48006-125</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3