



R48006-200

Features:

| |
|---|
| Size Radial |
| Lead Free and compliant with the European Union |
| Fast tripping resettable circuit protection |
| Surface mount packaging for automated assembly |

Technical Specifications:

I_h= Hold current maximum current device will pass without interruption in 25° C still air unless

I_t= Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

V_{max}= Maximum Voltage device can withstand without damage at rated current

V_{max. Interrupt}= Maximum interrupt voltage device can withstand without damage at current

I_{max}= Maximum fault current device can withstand without damage at rated voltage.

Time-TO-TRIP= Maximum Time to trip (s) at assigned current.

P_{d typ}= Typical Power dissipation : typical amount of power dissipated by the device when in state air environment

R_{min}= Minimum device resistance at 25°C prior to tripping

R_{max}= Minimum device resistance at 25°C prior to tripping

R_{1max}= The maximum resistance of the device at 25°C 1hour after being tripped or after reflow soldering:

Thermal Derating chart-I H (A)

| Range | Maximum ambient operating temperature (°C) | | | | | | | | |
|--------|---|------|------|------|------|------|------|------|------|
| | -.40 | -.20 | 0 | 23 | 40 | 50 | 60 | 70 | 85 |
| 2000mA | | 3,30 | 2,60 | 2,00 | 1,60 | 1,50 | 1,30 | 1,20 | 1,10 |

Approval:



| | |
|-------------------------------------|-------------------|
| Radial POLY FUSE 240Volt | |
| Part No.: | R48006-200 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW: | Lexua | CHKD | Wilson | MATL: | ChuChu | DATE | 06.04.2009 |
| APPD: | Jimmy | | | FINISH | Josy | Sheet | 1 from 3 |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




Technical Drawing and Informations

Dimensions

| A (mm) | | B (mm) | | C (mm) | | D (mm) | | E (mm) | |
|--------|--------------|--------|--------------|--------|-------------|--------|-------------|--------|-------------------|
| Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| | 24,90 | | 33,80 | | 6,10 | | 7,60 | | 8,90 11,40 |

Type 2



Performance Rating:

| Range | ICH | IT | V max | I m ax | Pd typ | Maximum Time to Trip | | Resistance: | | |
|-------|---------------|-------------|-------------|--------------|-------------|----------------------|--------------|-------------|-------------|-------------|
| | (A) | (A) | (V DC) | (A) | (W) | Current (A) | Time (Sec.) | Rmin (Ω) | Rmax (Ω) | R1max (Ω) |
| | 2000mA | 2,00 | 4,00 | 240,0 | 20,0 | 4,5 | 10,00 | 28,0 | 0,09 | 0,13 |

Radial POLY FUSE 240Volt

Part No.: **R48006-200**

Customer:


| | | | | | | | |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW: | Lexua | CHKD | Wilson | MATL: | ChuChu | DATE | 06.04.2009 |
| APPD: | Jimmy | | | FINISH | Josy | Sheet | 2 from 3 |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




Soldering Information

Lead Solder Performance

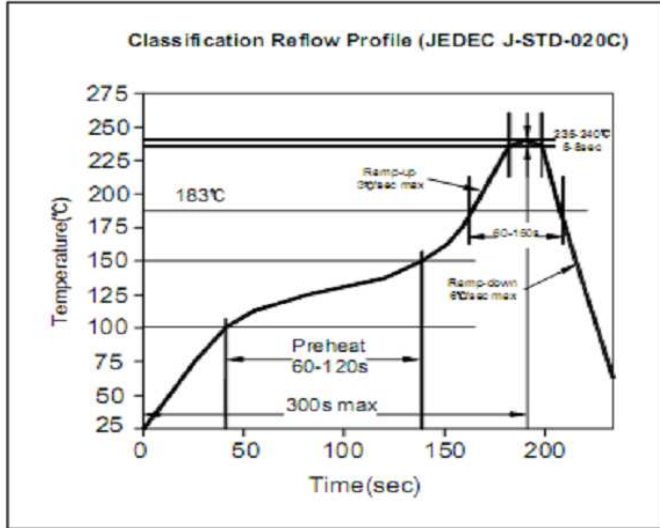

Lead free Solder Performance

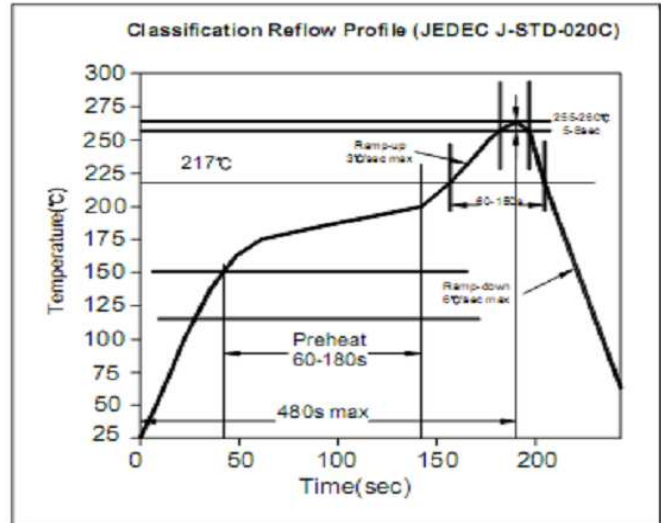

Ordering Informations:

| Item-No. & Range | ROHS | Packing |
|------------------|------|---------|
|------------------|------|---------|

| | | |
|-------------------|----------|-----------|
| R48006-200 | R | BU |
|-------------------|----------|-----------|

200 =
2000mA

| | |
|--------------------|----------------------------|
| R= ROHS | BU= Bulk / Standard |
| N= Non ROHS | TR= Tape / Reel |

| | |
|-------------------------------------|-------------------|
| Radial POLY FUSE 240Volt | |
| Part No.: | R48006-200 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|--------|--------|--------|-------|------------|
| DRW: | Lexua | CHKD | Wilson | MATL: | ChuChu | DATE | 06.04.2009 |
| APPD: | Jimmi | | | FINISH | Josi | Sheet | 3 from 3 |