



## R48007-2000

### Features:

Size Radial
Lead Free and compliant with the European Union
Fast tripping resettable circuit protection
Surface mount packaging for automated assembly

### Technical Specifications:

**I<sub>h</sub>**= Hold current maximum current device will pass without interruption in 25° C still air unless

**I<sub>T</sub>**= Trip current: minimum current that will switch the device from low resistance, Resistance in 25°C still unless otherwise specified.

**V<sub>max</sub>**= Maximum Voltage device can withstand without damage at rated current

**V<sub>max. Interrupt</sub>**= Maximum interrupt voltage device can withstand without damage at current

**I<sub>max</sub>**= Maximum fault current device can withstand without damage at rated voltage.

**Time-TO-TRIP**= Maximum Time to trip (s) at assigned current.

**P<sub>d typ</sub>**= Typical Power dissipation : typical amount of power dissipated by the device when in state air environment

**R<sub>min</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>max</sub>**= Minimum device resistance at 25°C prior to tripping

**R<sub>1max</sub>**= The maximum resistance of the device at 25°C 1hour after being tripped or after reflow soldering:

### Thermal Derating chart-I H (A)

Range	Maximum ambient operating temperature ( °C)								
	-.40	-.20	0	23	40	50	60	70	85
2000mA	3,100	2,750	2,360	2,000	1,650	1,460	1,274	1,100	0,820

### Approval:



<b>Radial POLY FUSE 250Volt</b>	
Part No.:	<b>R48007-2000</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	1 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




## Technical Drawing and Informations

### Dimensions

A (mm)		B (mm)		C (mm)		D (mm)		E (mm)	
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
	<b>22,50</b>		<b>29,00</b>		<b>3,00</b>		<b>5,00</b>		<b>10,20</b>

### Type 2

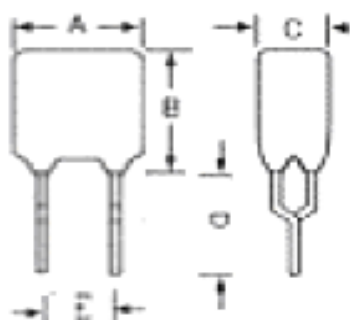

### Performance Rating:

Range	ICH	IT	V max	I m ax	Pd typ	Maximum Time to Trip		Resistance:		
	(A)	(A)	(V DC)	(A)	(W)	Current (A)	Time (Sec.)	Rmin (Ω)	Rmax (Ω)	R1max (Ω)
	<b>2000mA</b>	<b>2,000</b>	<b>4,00</b>	<b>250,0</b>	<b>10,0</b>	<b>3,0</b>	<b>5,0</b>	<b>20,0</b>	<b>0,10</b>	<b>0,40</b>

### Radial POLY FUSE 250Volt

Part No.: **R48007-2000**

Customer:


DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmy			FINISH	Josy	Sheet	2 from 3

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009




**Soldering Information**

**Lead Solder Performance**

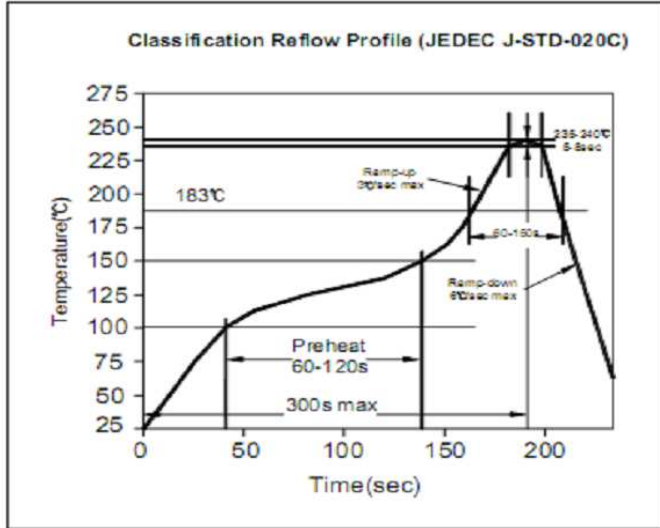

**Lead free Solder Performance**

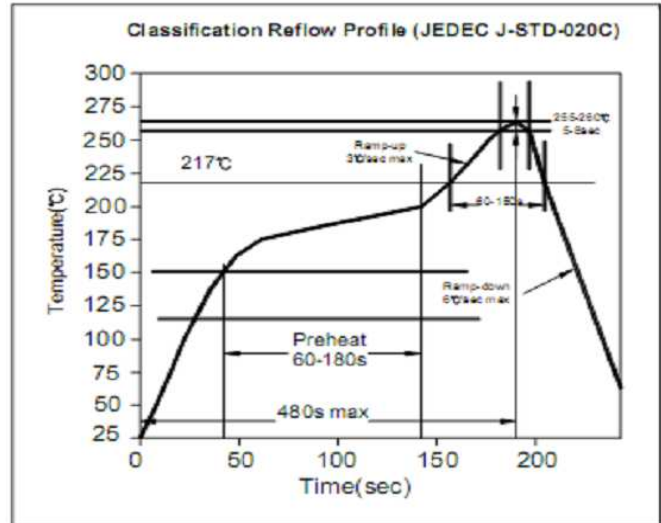

**Ordering Informations:**

Item-No. & Range	ROHS	Packing
------------------	------	---------

<b>R48007-2000</b>	<b>R</b>	<b>BU</b>
--------------------	----------	-----------

**2000 =**  
2000mA

<b>R=</b> ROHS	<b>BU=</b> Bulk / Standard
<b>N=</b> Non ROHS	<b>TR=</b> Tape / Reel

<b>Radial POLY FUSE 250Volt</b>	
Part No.:	<b>R48007-2000</b>
Customer:	

DRW:	Lexua	CHKD	Wilson	MATL:	ChuChu	DATE	06.04.2009
APPD:	Jimmi			FINISH	Josi	Sheet	3 from 3