


EDCON-COMPONENTS






T13A002

Technical Specifications:

Operating Temperature:
Rated Load:
Contact Resistance:
Insulation Resistance:
Withstanding Voltage:
Actuating Force:
Lifetime:

. -30°C ~ + 70°C
DC 30V / 0,5A
< 0,03 Ohm
> 100M Ohm
AC 500V (50Hz) 1min.
3 ~ 20N
5000 cycles

Technical Drawing:

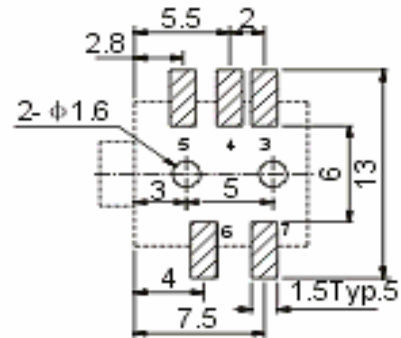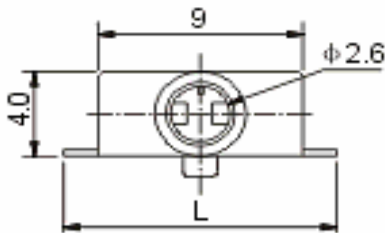


L	12.0	CK-2.5-005	CK-2.5-005-1	CK-2.5-005-2	CK-2.5-005-3
	11.0	CK-2.5-0050	CK-2.5-0050-1	CK-2.5-0050-2	CK-2.5-0050-3

2,5mm SMT Audio jack
Part No.: T13A002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	06.05.2007
APPD:	Schumi			FINISH	Jamy	Sheet	1 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009


EDCON-COMPONENTS




Reel Specifications

Solder Profile

Lead Solder

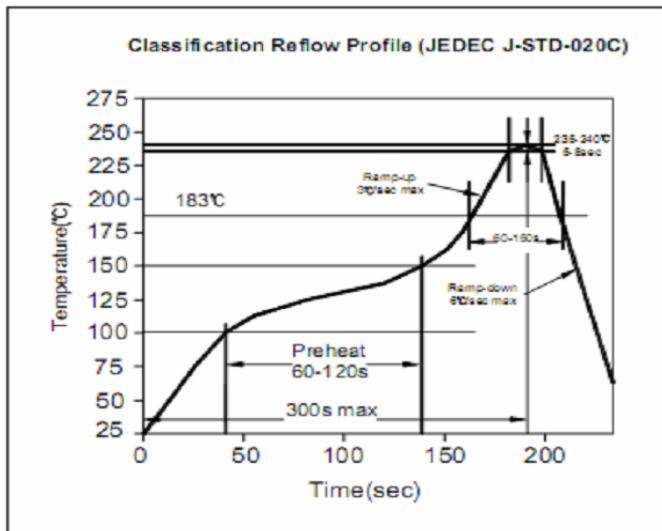

Lead free Solder

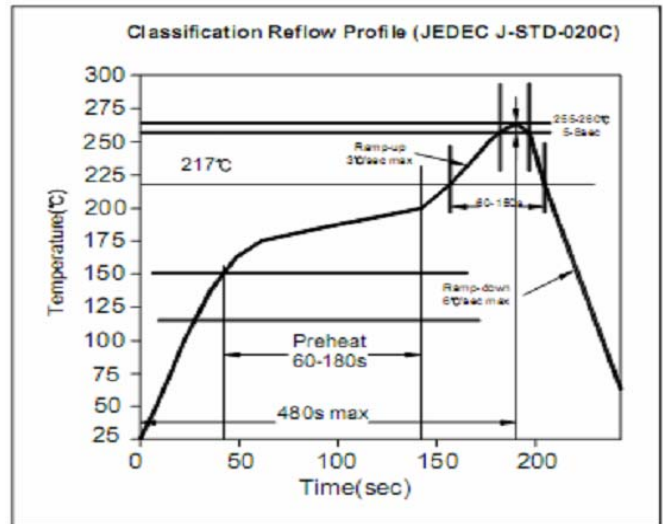

Ordering Informations:

Item-No.	Circuit	ROHS	Packing			
T13A002	A	R	BU			

A	R= ROHS	BU= Bulk (Standard)
B	N= Non	
C	ROHS	TR=
D		Tape/Reel
E		TR= Tray
F		Packing
G		
H		

2,5mm SMT Audio jack	
Part No.:	T13A002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	06.05.2007
APPD:	Schumi			FINISH	Jamy	Sheet	2 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009