

EDCON-COMPONENTS






T13A007

Technical Specifications:

| |
|------------------------|
| Operating Temperature: |
| Rated Load: |
| Contact Resistance: |
| Insulation Resistance: |
| Withstanding Voltage: |
| Actuating Force: |
| Lifetime: |
| |
| |

| |
|----------------------|
| . -30°C ~ + 70°C |
| DC 30V / 0,5A |
| < 0,03 Ohm |
| > 100M Ohm |
| AC 500V (50Hz) 1min. |
| 3 ~ 20N |
| 5000 cycles |
| |
| |

Technical Drawing:

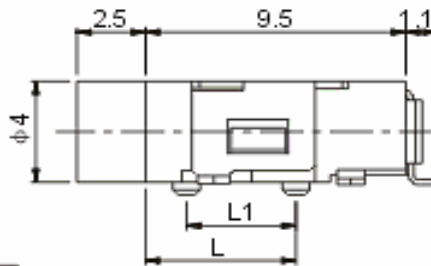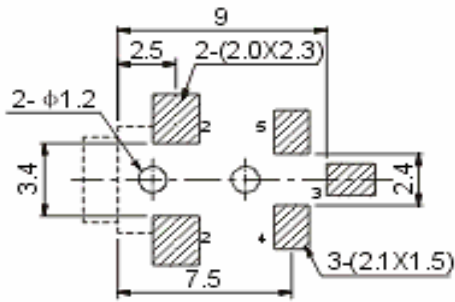

| | | | |
|--------------|-------------|---------------|---------------|
| L=5.5 L1=4.0 | CK-2.5-009 | CK-2.5-009-2 | CK-2.5-009-3 |
| L=0 L1=0 | CK-2.5-009A | CK-2.5-009A-2 | CK-2.5-009A-3 |
| L=5.5 L1=1.3 | CK-2.5-009B | CK-2.5-009B-2 | CK-2.5-009B-3 |
| SCHEMATIC | | | |

| |
|--------------------------|
| 2,5mm SMT Audio jack |
| Part No.: T13A007 |
| Customer: |

| | | | |
|--------------|--------------|-----------------|------------------|
| DRW: Jason | CHKD: Wilson | MATL: Wilson | DATE: 06.05.2007 |
| APPD: Schumi | FINISH: Jamy | Sheet: 1 from 2 | |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009


EDCON-COMPONENTS




Reel Specifications

Solder Profile

Lead Solder

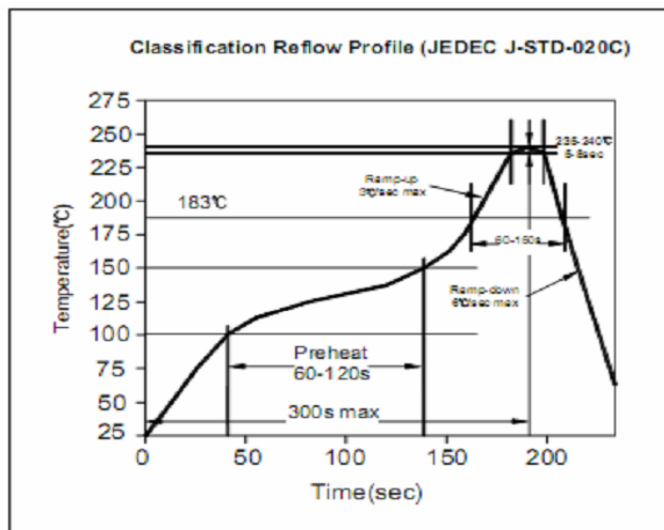

Lead free Solder

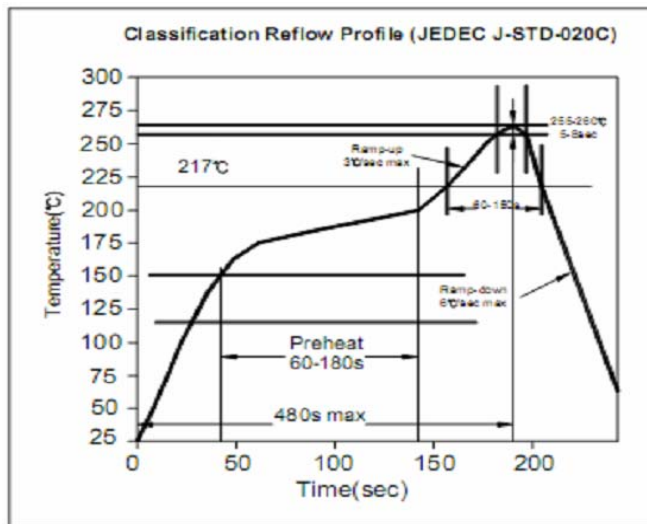

Ordering Informations:

| | | | | | | |
|----------|---------|------|---------|--|--|--|
| Item-No. | Circuit | ROHS | Packing | | | |
| T13A007 | A | R | BU | | | |

| | | |
|---|---------|---------------------|
| A | R= ROHS | BU= Bulk (Standard) |
| B | N= Non | |
| C | ROHS | TR= |
| D | | Tape/Reel |
| E | | TR= Tray |
| F | | Packing |
| G | | |
| H | | |
| I | | |

| | |
|----------------------|----------------|
| 2,5mm SMT Audio jack | |
| Part No.: | T13A007 |
| Customer: | |

| | | | | | | | |
|-------|--------|------|--------|--------|--------|-------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | DATE | 06.05.2007 |
| APPD: | Schumi | | | FINISH | Jamy | Sheet | 2 from 2 |

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009