


# EDCON-COMPONENTS






## T13G125

### Technical Specifications:

Operating Temperature:	-30°C ~ + 70°C
Rated Load:	DC 30V / 0,5A
Contact Resistance:	< 0,03 Ohm
Insulation Resistance:	> 100M Ohm
Withstanding Voltage:	AC 500V (50Hz) 1min.
Actuating Force:	3 ~ 20N
Lifetime:	5000 cycles

Operating Temperature:	-30°C ~ + 70°C
Rated Load:	DC 30V / 0,5A
Contact Resistance:	< 0,03 Ohm
Insulation Resistance:	> 100M Ohm
Withstanding Voltage:	AC 500V (50Hz) 1min.
Actuating Force:	3 ~ 20N
Lifetime:	5000 cycles

### Technical Drawing:

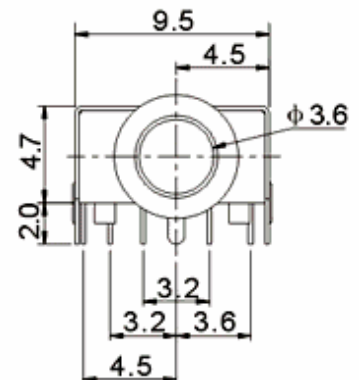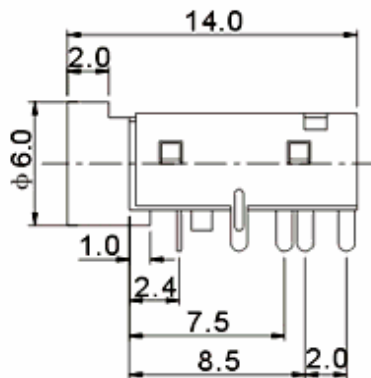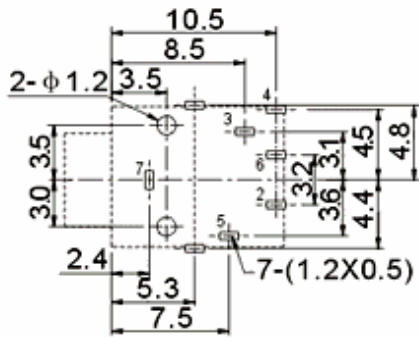


CK-3.5-043D	CK-3.5-043D-2	CK-3.5-043D-3
CK-3.5-043D-4	CK-3.5-053D	CK-3.5-053D-2

3,5mm THT Audio jack	
Part No.:	<b>T13G125</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	06.05.2007
APPD:	Schumi			FINISH	Jamy	Sheet	1 from 2


Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009

# EDCON-COMPONENTS




## Solder Profile

### Lead Solder

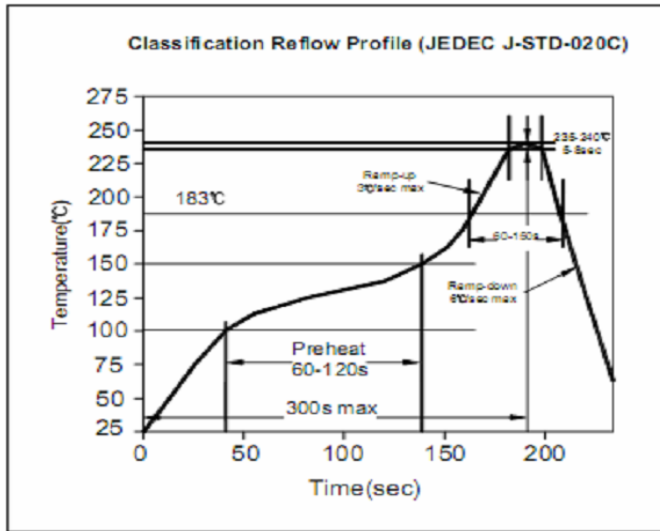

### Lead free Solder

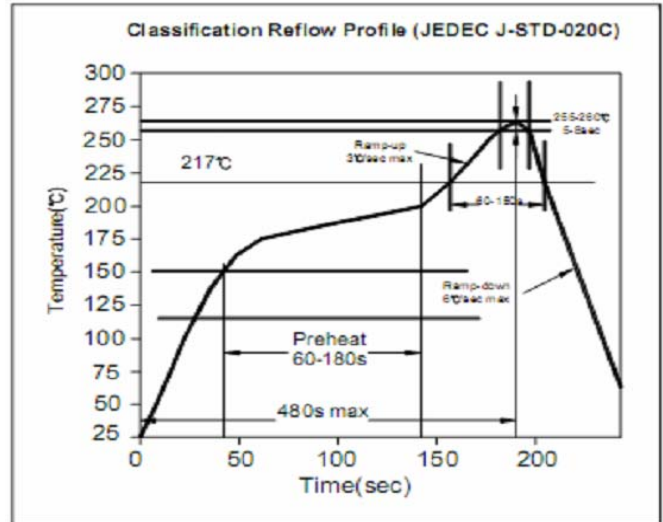

## Ordering Informations:

Item-No.	Circuit	ROHS	Packing			
<b>T13G125</b>	<b>A</b>	<b>R</b>	<b>BU</b>			

<b>A</b>	<b>R= ROHS</b>	<b>BU= Bulk (Standard)</b>
<b>B</b>	<b>N= Non ROHS</b>	
<b>C</b>		<b>TY= Tray Packing</b>
<b>D</b>		
<b>E</b>		
<b>F</b>		

3,5mm THT Audio jack	
Part No.:	<b>T13G125</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	06.05.2007
APPD:	Schumi			FINISH	Jamy	Sheet	2 from 2

Copyright by EDCON-COMPONENTS H.Schmitt 11.6.2009