






EDCON-COMPONENTS

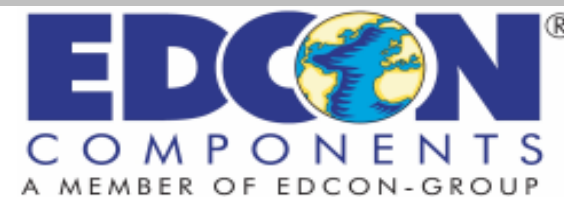

SPECIFICATION:

Temperature:	. -25°C ~ +70°C
Rated Load	DC 30V 0,5A
Contact Resistance	≤ 0,03 Ω
Insulation Resistance	≥ 100M Ω
Withstand Voltage	AC 250V (50Hz) 1min.
Insetion and Extraction For	5 ~30N
Lifetime	1000 Time

Drawing

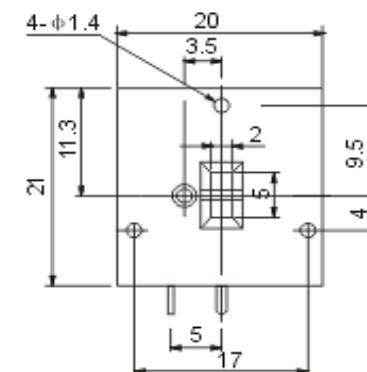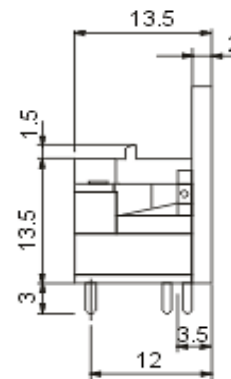


Audio Box Connector

Part No.: **T13Q001**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	ROHS	Packing					
T13Q001	02	RT	T0	R	TY					


02= total	RT = Right angle THT	T0 = Tin plated	R =ROHS conform	BU = Bulk
			N = NO ROHS conform	TY = Tray Packing

Audio Box Connector

Part No.: **T13Q001**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

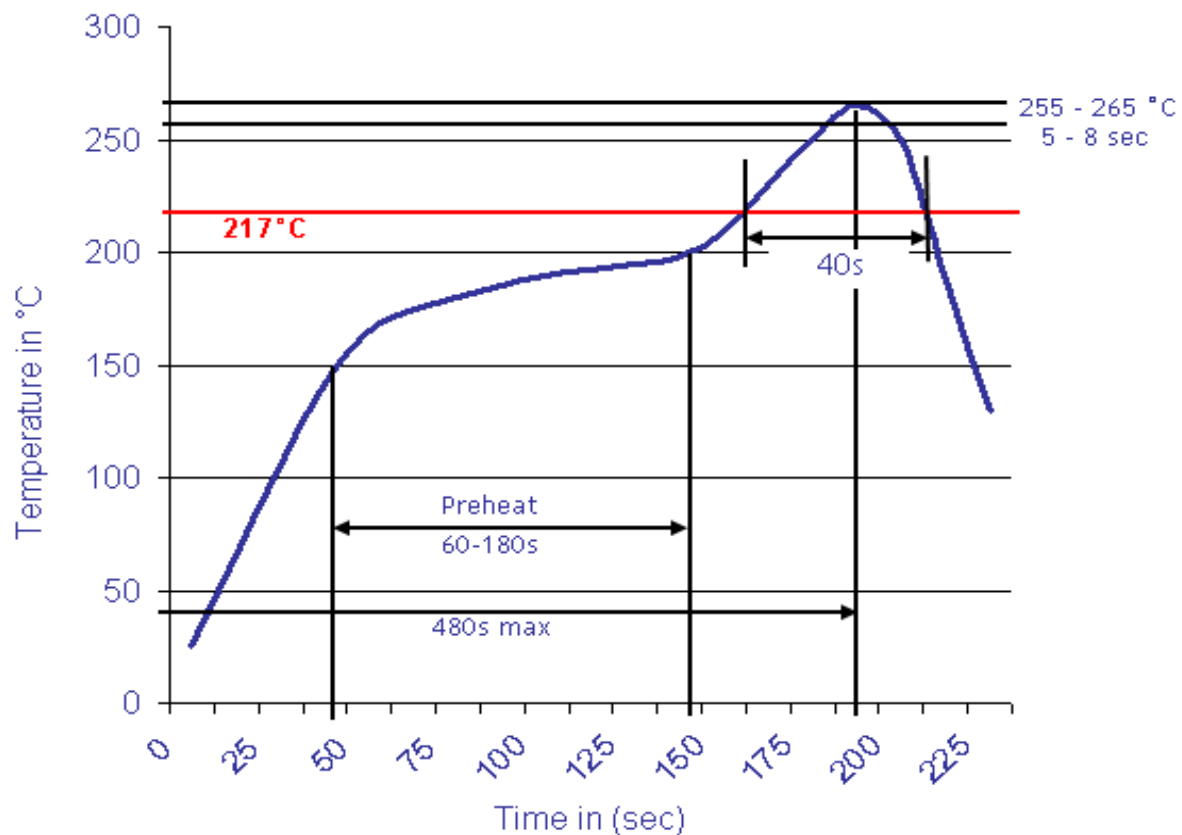

Audio Box Connector

Part No.: **T13Q001**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	08.06.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	