




T65002

Technical Specifications:

Operating Temperature:
Rated Load:
Contact Resistance:
Insulation Resistance:
Withstanding Voltage:
Actuating Force:
Lifetime:

-.40°C ~ 70°C
DC 30V / 0,2A
< 0,03 Ohm
> 100M Ohm
AC 500V (50Hz) 1min.
10 ~ 35N
5000 cycles

Technical Drawing:

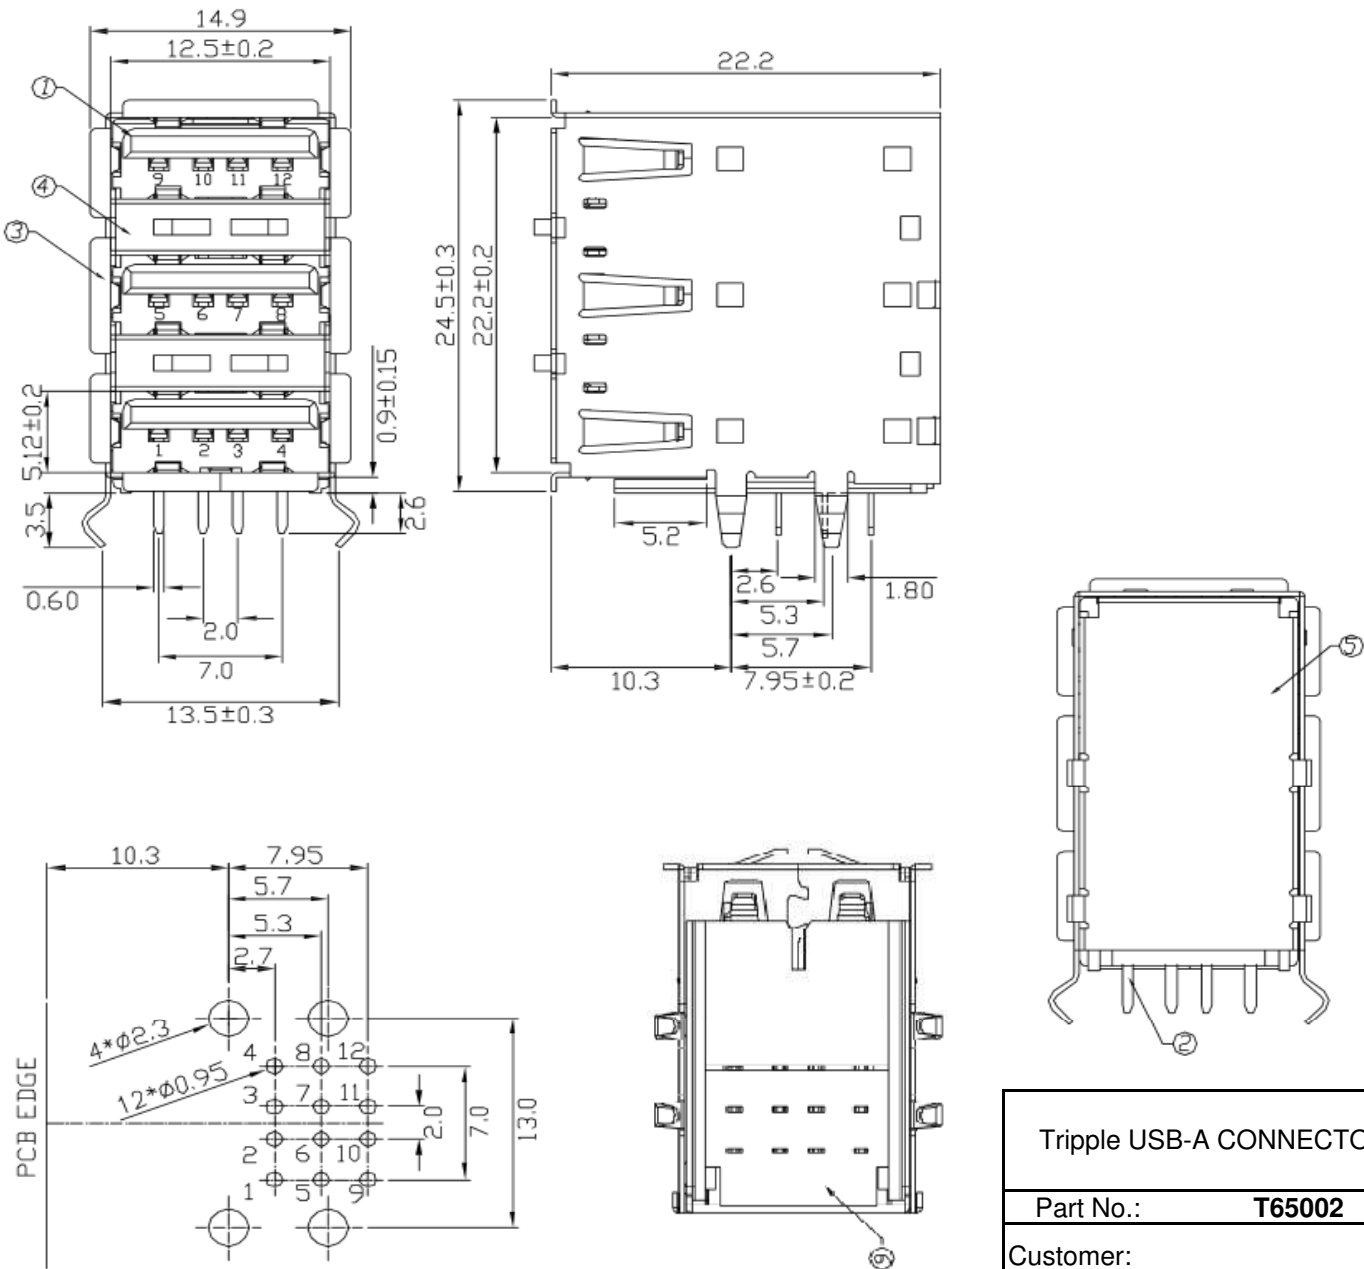

Triple USB-A CONNECTOR	
Part No.:	T65002
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	07.12.2021
APPD:	Schumi			FINISH	Jamy	Sheet	1 from 2

EDCON-COMPONENTS




Solder Profile

Lead Solder

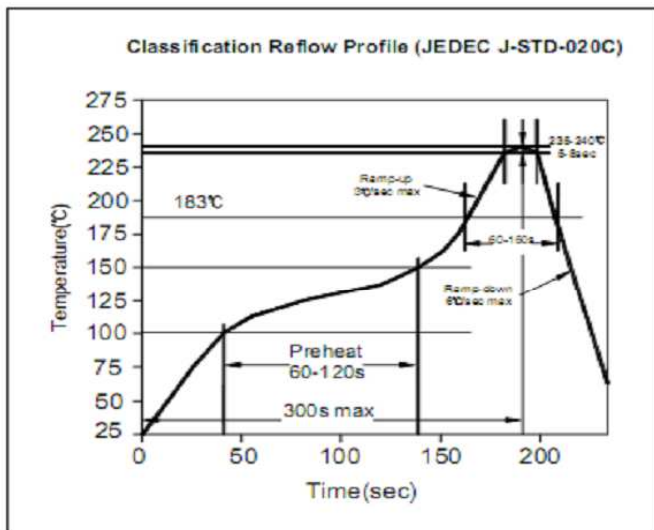

Lead free Solder

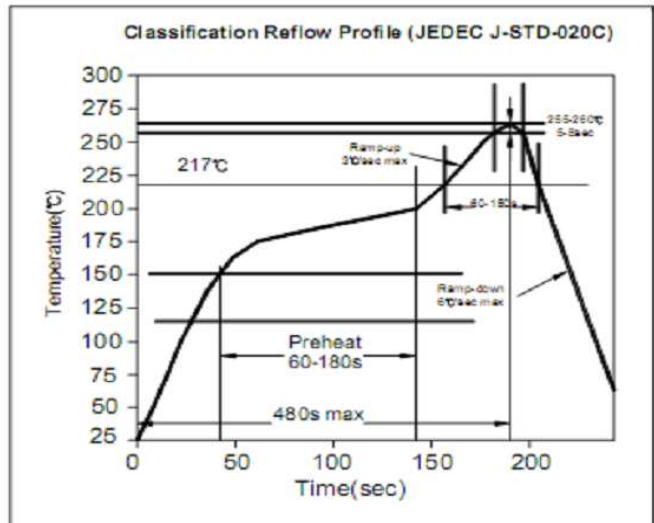

Ordering Informations:

Item-No.	ROHS	Packing				
T65002	R	BU				

R= ROHS	BU= Bulk (Standard)	
N= Non ROHS	TY= Tray Packing	
	TU= Tube Packing	

Tripple USB-A CONNECTOR
Part No.: T65002
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	DATE	07.12.2021
APPD:	Schumi			FINISH	Jamy	Sheet	2 from 2

Copyright by S.Tiede