


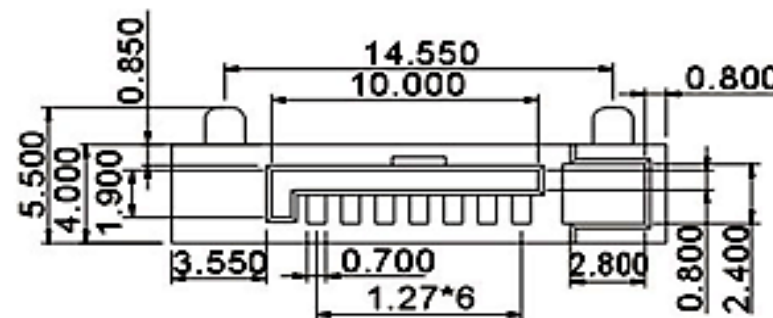


EDCON-COMPONENTS

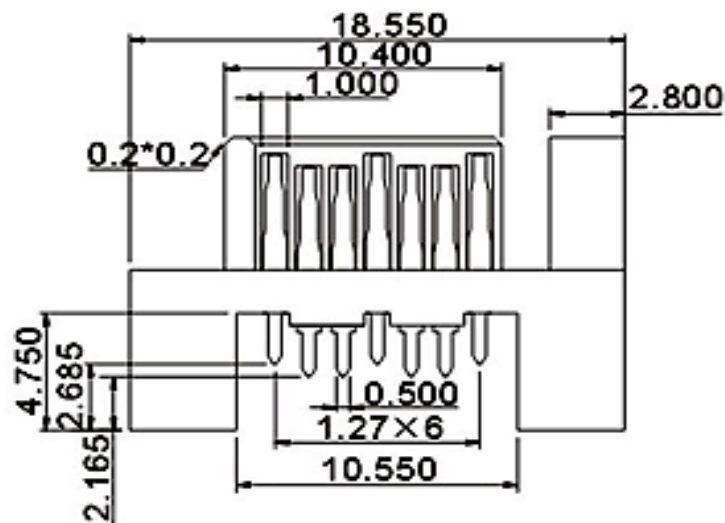

Technical Discription


Temperature Range:	. -30°C ~ +70°C
Rated Load	DC30V 0,5A
Contact Resistance:	≤ 0,03 Ω
Insulation Resistance:	≥ 500M Ω
Withstanding Voltage:	AC 500V / 50Hz) 1 min.
Insertion and Extraction Force:	3 ~ 20N
Lifetime:	5000 cycles

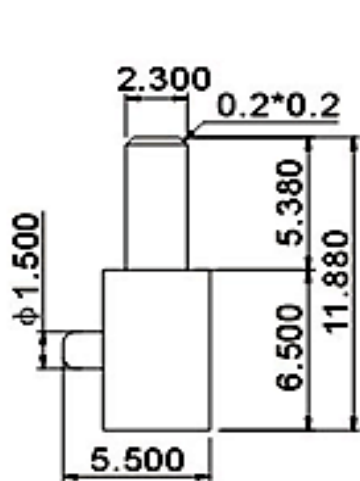

SATA Connector	
Part No.:	T77002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS




Ordering Informations

Serie	Pos.	ROHS	Packing							
T77002	07	R	TY							

07= 7Pos.	R= ROHS Conform	TY= Tray Package
	R= ROHS Conform	BU= Bulk Ware


SATA Connector	
Part No.:	T77002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



Lead Free Soldering Curve

Classification Reflow Profile (JEDEC J-STD-020C)

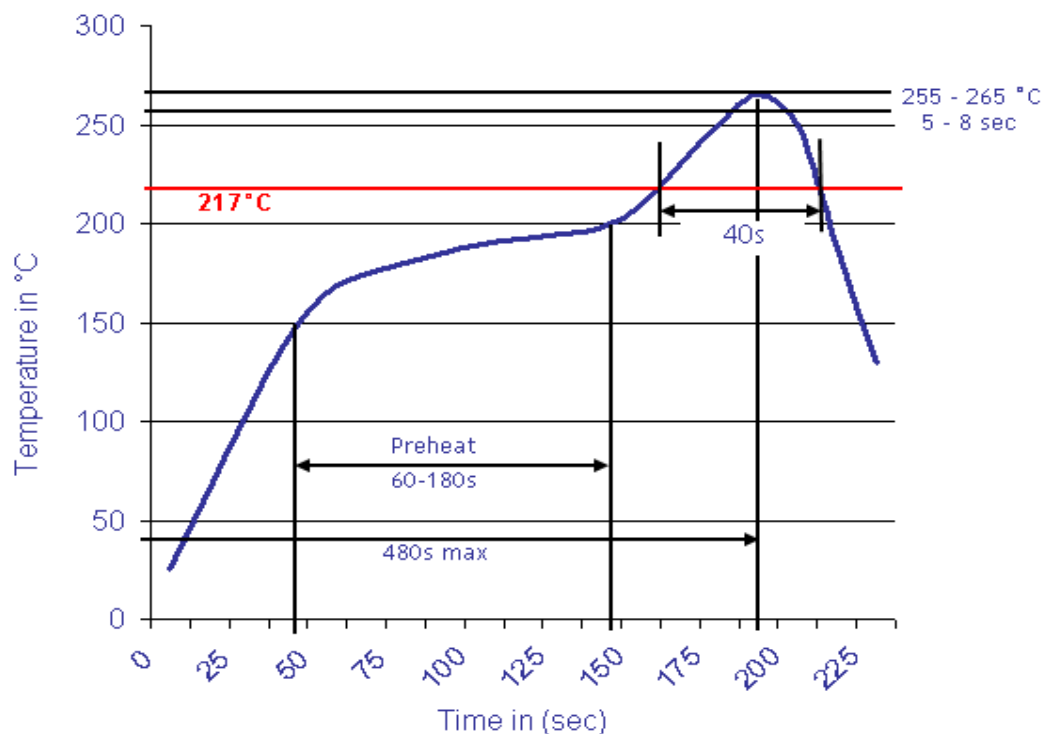

SATA Connector	
Part No.:	T77002
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	