



EDCON-COMPONENTS

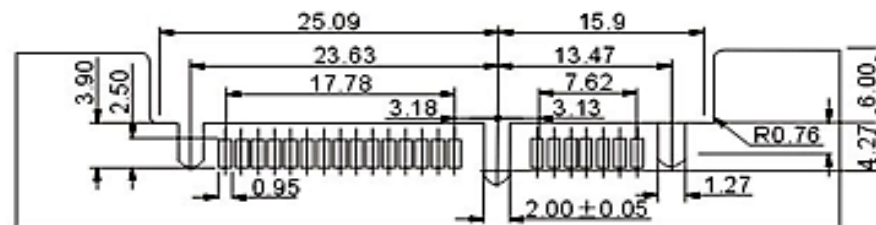

Technical Discription

Temperature Range: . -30°C ~ +70°C
 Rated Load DC30V 0,5A
 Contact Resistance: ≤ 0,03 Ω
 Insulation Resistance: ≥ 500M Ω
 Withstanding Voltage: AC 500V / 50Hz) 1 min.
 Insertion and Extraction Force: 3 ~ 20N
 Lifetime: 5000 cycles

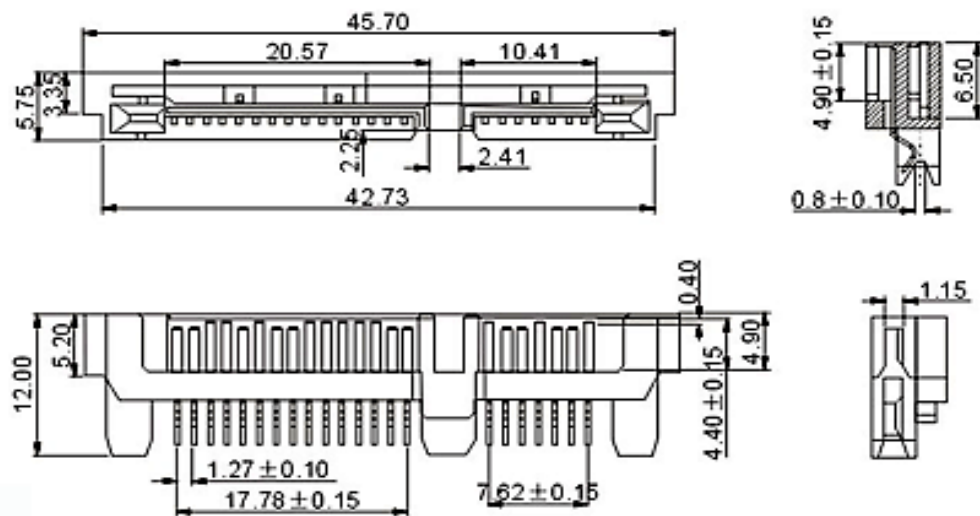

SATA Connector	
Part No.:	T77008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Pos.	ROHS	Packing							
T77008	22	R	TY							

22= 15+7Pos.	R= ROHS Conform	TY= Tray Package
	R= ROHS Conform	BU= Bulk Ware


SATA Connector	
Part No.:	T77008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Lead Free Soldering Curve

Classification Reflow Profile (JEDEC J-STD-020C)

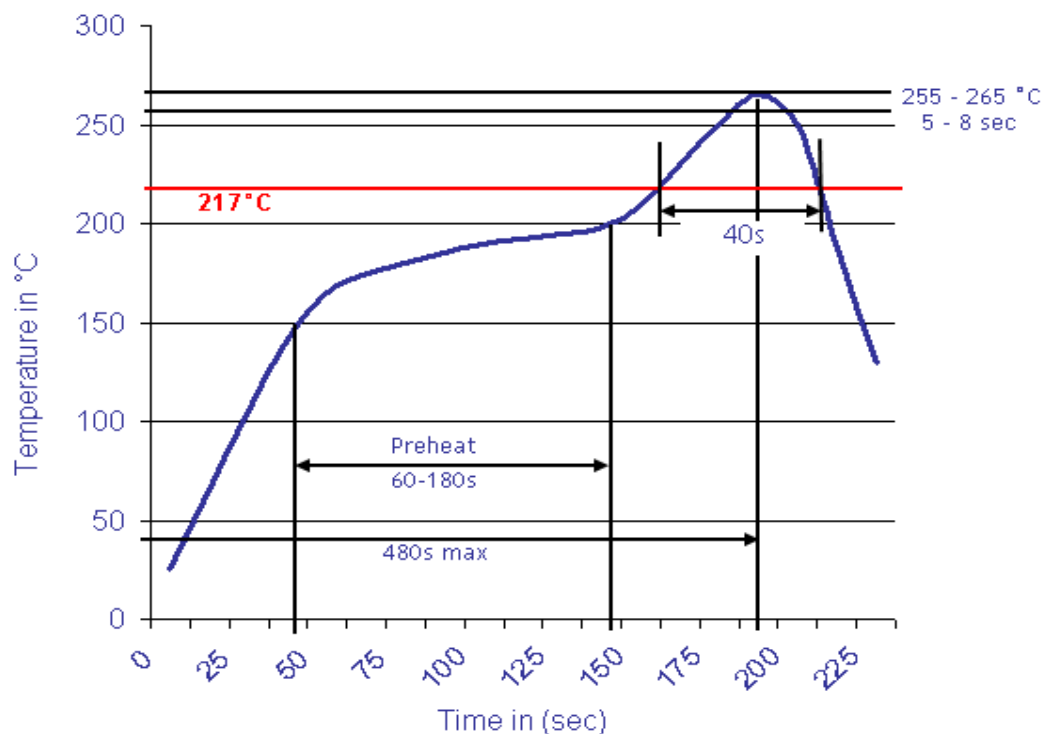

SATA Connector	
Part No.:	T77008
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	