


# EDCON-COMPONENTS



## Technical Discription

Temperature Range:  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$   
 Rated Load: DC12V 0,5A  
 Contact Resistance:  $\leq 0,03 \Omega$   
 Insulation Resistance:  $\geq 100\text{M} \Omega$   
 Withstanding Voltage: AC 250V / 50Hz) 1 min.  
 Insertion and Extraction Force: 100~300gr. F  
 Lifetime: 100000 cycles

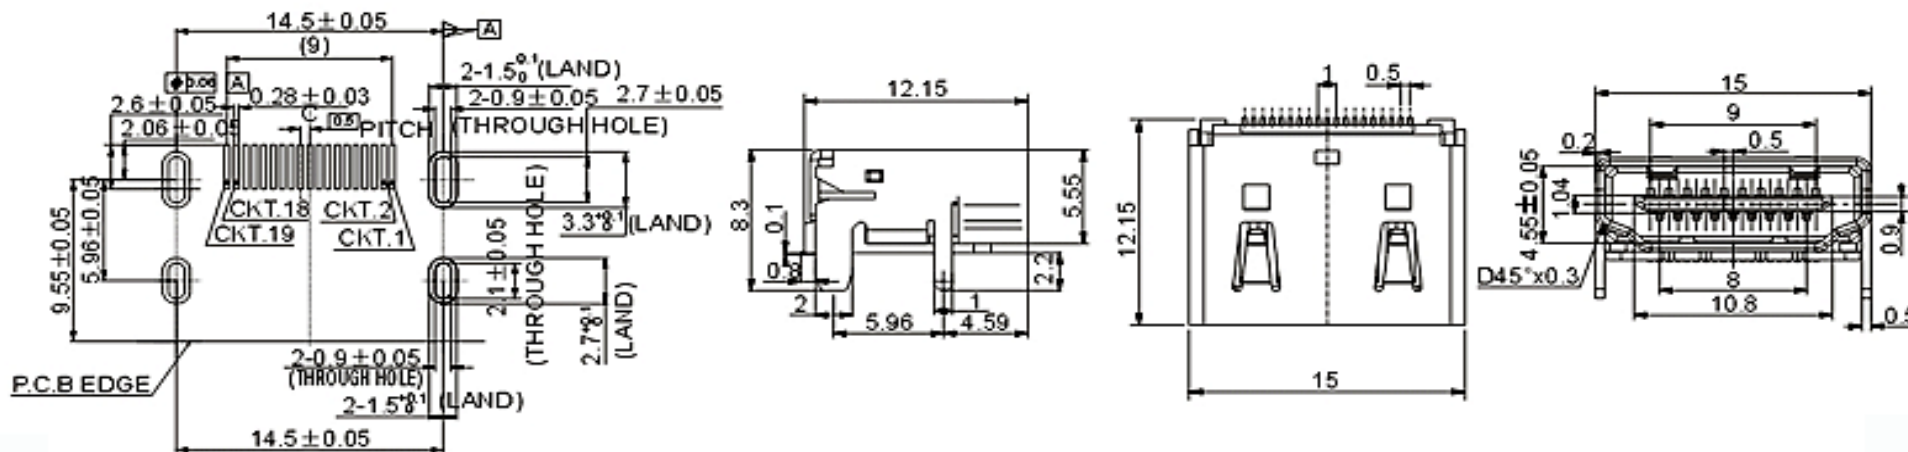

<b>HDMI Connector</b>	
Part No.:	<b>T81005</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

# EDCON-COMPONENTS



## Ordering Informations

Serie	Pos.	ROHS	Packing							
<b>T81005</b>	<b>19</b>	<b>R</b>	<b>BU</b>							

<b>19=</b> 19Pos.	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk Ware
	<b>N=</b> NON ROHS Conform	


<b>HDMI Connector</b>	
Part No.:	<b>T81005</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



**Lead Free Soldering Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

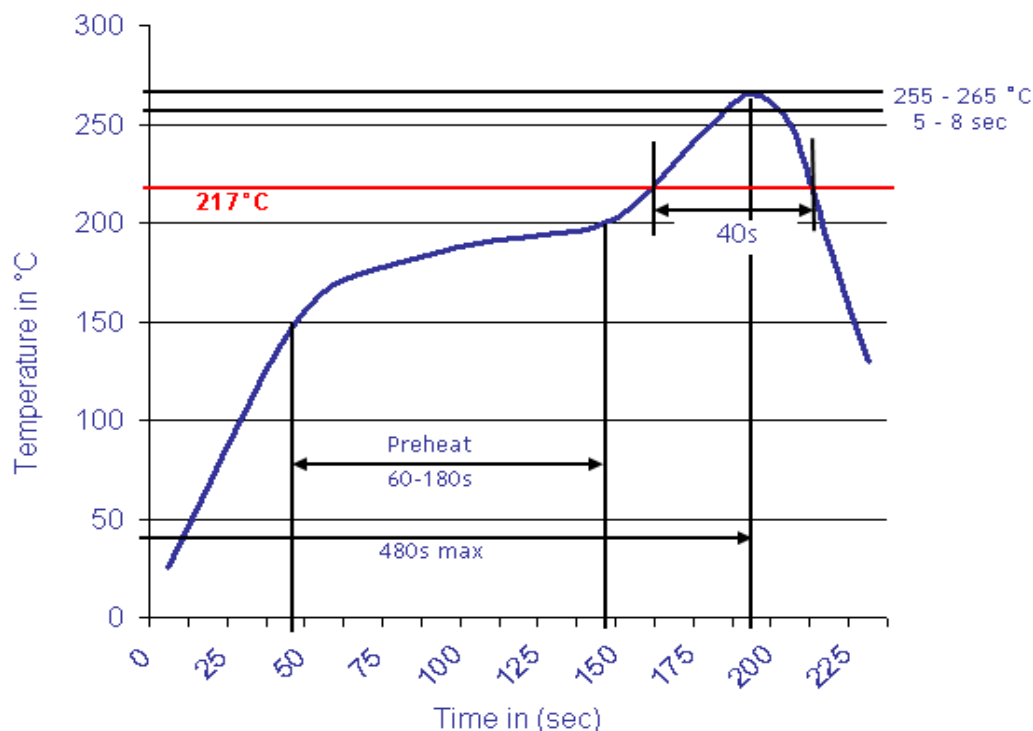

<b>HDMI Connector</b>	
Part No.:	<b>T81005</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	07.10.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3