







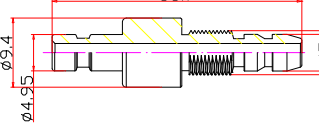

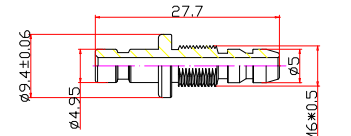

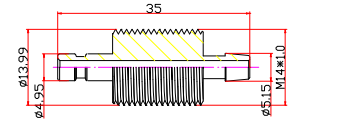
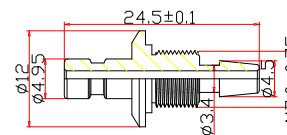


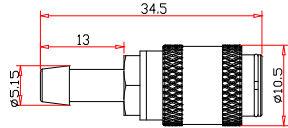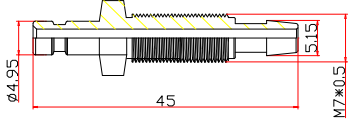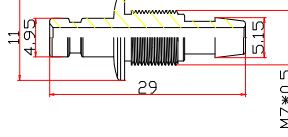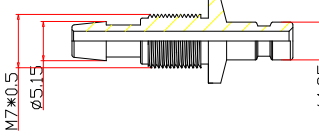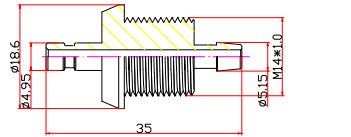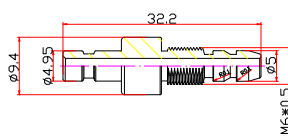

# EDCON-COMPONENTS

## T85005 Metal gas path connectors


1. Gas path connectors are applicable to the connection of gas (water) pipelines of medical instrument and relevant devices		
Main technical specifications of metal/plastic gas path	Working temperature	-30℃~+60℃
	Leakage rate	Not more than 4mmHg/min (0.5Kpa/min) when the pressure difference of metal gas path is 400mmHg
	Mechanical life	>1000 times (connection and disconnection)

 <p><b>T85005-T</b></p>	 <p><b>T85005-J</b></p>	 <p><b>T85005-Z1</b></p>
 <p><b>T85005-Z2</b></p>	 <p><b>T85005-Z3</b></p>	 <p><b>T85005-Z4</b></p>
 <p><b>T85005-Z5</b></p> <p>Drilling pattern dimension</p> 	 <p><b>T85005-Z6</b></p> <p>Drilling pattern dimension</p> 	 <p><b>T85005-Z7</b></p> <p>Drilling pattern dimension</p> 
 <p><b>T85005-Z8</b></p>	 <p><b>T85005-Z9</b></p> <p>Drilling pattern dimension</p> 	


# EDCON-COMPONENTS

## Plastic gas path connectors


1. Gas path connectors are applicable to the connection of gas (water) pipelines of medical apparatuses and related devices		
Main technical specifications of metal/plastic gas path	Working temperature	-30℃~+60℃
	Leakage rate	Not higher than 4mmHg/min (0.5Kpa/min) when the pressure difference of the plastic gas path is 600mmHg
	Mechanical life	>1000 times (connection and disconnections)

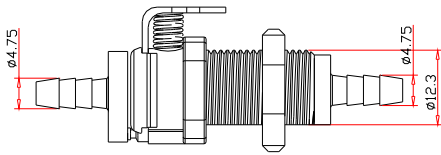

**Plastic gas path T85005-S**



Board dimensions

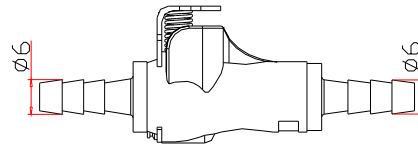

**Plastic gas path T85005-A**

