


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (3finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	Ø0,66mm or Square Pin 0,64mm
.-Insertion:	3N typ.
.-Withdrawel:	1,5N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Maximal position of deliver:	2
Maximal position of deliver:	40

Technical Drawing

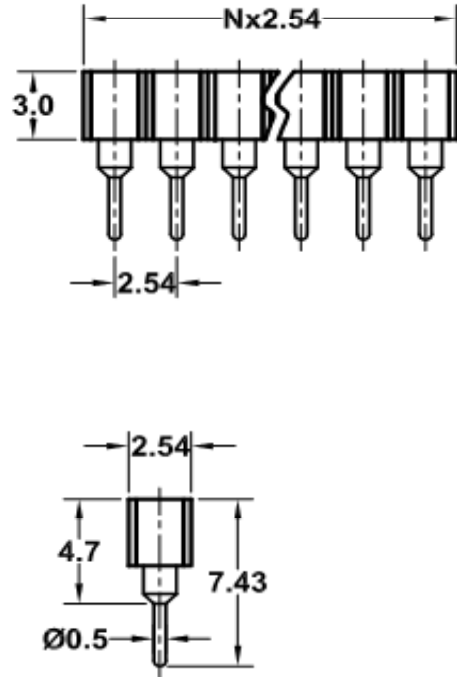

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing	
T40056	40	A	3	R	B1	

2 ~ 40	A = Tin 150µ"	1 = Tin 150µ"	R = ROHS conform	B1 = Bulk 100PCS
	(Standard)	2 = Tin 200µ"		
	B = Tin 200µ"	3 = GF (Standard)	N = NON ROHS conform	TR = Tape/Reel w. Pic and Place Pad
	C = GF			
	D = Gold 2µ"	4 = Gold 2µ"		TU = Tupe w. Pic and Place Pad
	E = Gold 3µ"	5 = Gold 3µ"		
	F = Gold 10µ"	6 = Gold 10µ"		
	G = Gold 15µ"	7 = Gold 15µ"		
H =Special	8 =Special			

**Machined Contact Pitch
2,54mm**

Part No.: **T40056**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	05.12.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by S.Tiede