



Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (3finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	0,40 to 0,56mm
Forces:	polished steel gauge(Ø)0,43mm
.-Insertion:	3N typ.
.-Withdrawel:	1,5N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Maximal position of deliver:	4
Maximal position of deliver:	80

Technical Drawing

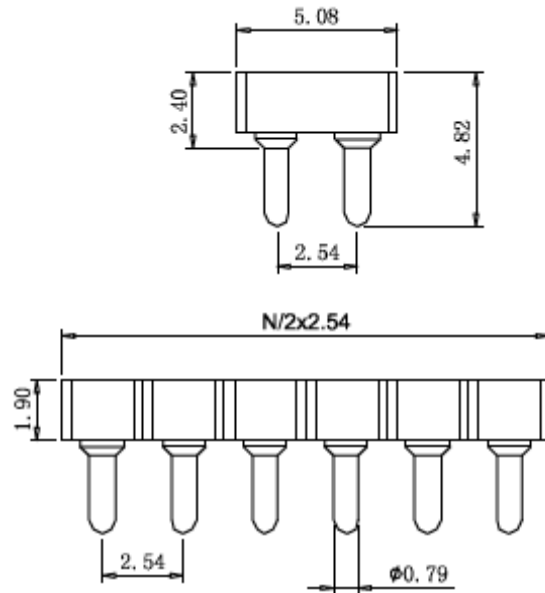

PCB Layout

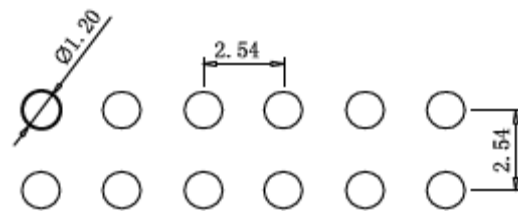

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing
T40059	04	A	3	R	B1

04 ~ 80	A = Tin 150µ"	1 = Tin 150µ"	R = ROHS conform	B1 = Bulk 100PCS			
	(Standard)	2 = Tin 200µ"					
	B = Tin 200µ"	3 = GF (Standard)			N = NON ROHS conform		
	C = GF						
	D = Gold 2µ"	4 = Gold 2µ"				TR = Tape/Reel w. Pic and Place Mylar-Foil	
	E = Gold 3µ"	5 = Gold 3µ"					
	F = Gold 10µ"	6 = Gold 10µ"					TU = Tupe w. Pic and Place Mylar Foil
	G = Gold 15µ"	7 = Gold 15µ"					
H =Special	8 =Special						

**Machined Contact Pitch
2,54mm**

Part No.: **T40059**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	21.07.2017
APPD:	Join			FINISH	Shieh	Sheet	1 from 1