

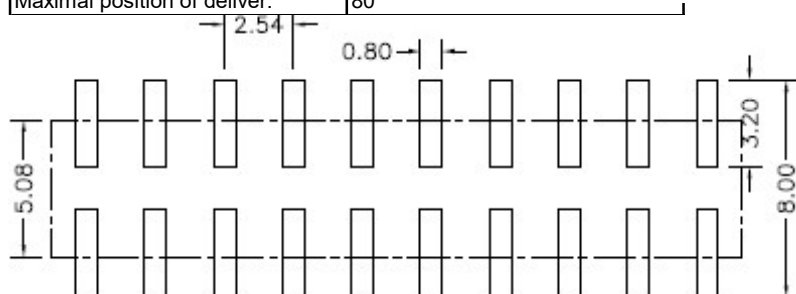
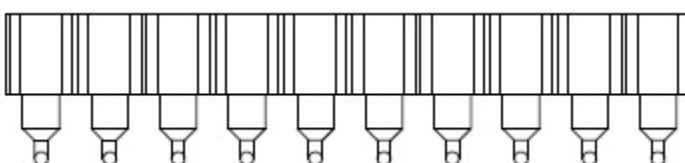


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (3finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	Ø 0,66mm
Forces:	polished steel gauge(Ø)0,43mm
.-Insertion:	2N typ.
.-Withdrawal:	1N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Temperature range:	.-40°C to +105°C
Maximal position of deliver:	4
Maximal position of deliver:	80

Technical Drawing

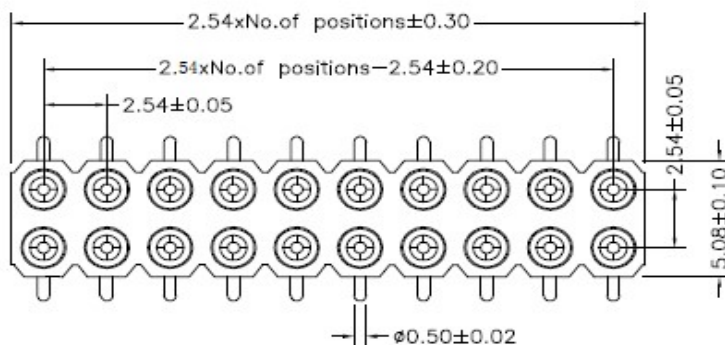

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing	
-------	-------------	--------------------	--------------------	------	---------	--

T40107	-	XX	A	3	R	B1
---------------	---	-----------	----------	----------	----------	-----------

4 ~ 80	A= Tin 150μ" (Standard)	1= Tin 150μ" 2= Tin 200μ"	R= ROHS conform	B1= Bulk 100PCS
	B= Tin 200μ"	3= GF (Standard)	N= NON ROHS conform	TR = Tape/Reel w. Pic and Place Cad
	C= GF			
	D= Gold 2μ"	4= Gold 2μ"		TU = Tupe w. Pic and Place Pad
	E= Gold 3μ"	5= Gold 3μ"		
	F= Gold 10μ"	6= Gold 10μ"		
	G= Gold 15μ"	7= Gold 15μ"		
	H=Special	8=Special		

Machined Contact Pitch 2,54mm

Part No.: **T40107**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.10.2025
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by S.Tiede