
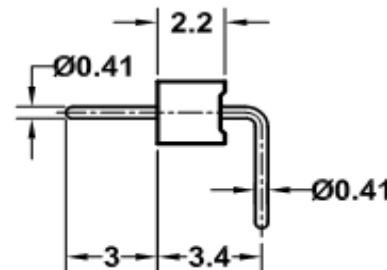


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Mating Pin: (Ø)	0,41mm
Mechanical Life:	min 500 cycles
Rated Current:	1A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 500V rms
Minimal position of deliver:	2
Maximal position of deliver:	50
Special Plastic:	Nylon 6T High Temperature Mat.

Technical Drawing

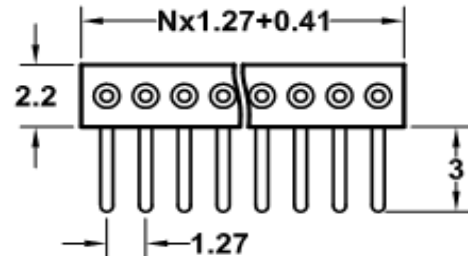

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	ROHS	Packing	Special function	
T40132	50	A	R	B1	HT	

02 ~ 50	A= Tin 150µ" (Standard)	R= ROHS conform	B1= Bulk 100PCS	HT= High Temperature Plastic Material
	B= Tin 200µ"	N= NON ROHS conform		
	C= GF			
	D= Gold 2µ"			
	E= Gold 3µ"			
	F= Gold 10µ"			
	G= Gold 15µ"			
	H= Special			

Machined Contact Pitch 1,27mm	
Part No.:	T40132
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1