
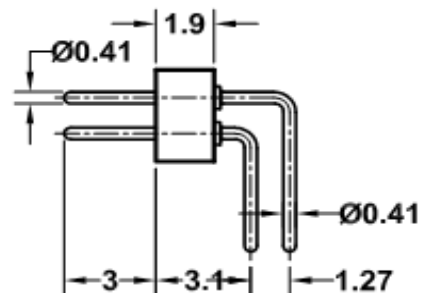


### Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Mating Pin: ( Ø )	0,41mm
Mechanical Life:	min 500 cycles
Rated Current:	1A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 500V rms
Minimal position of deliver:	4
Maximal position of deliver:	100

### Technical Drawing

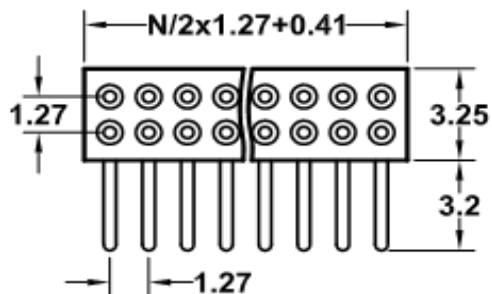

### Ordering Information

Serie	No. of Pos.	Solder Pin Plating	ROHS	Packing		
-------	-------------	--------------------	------	---------	--	--

<b>T40133</b>	<b>100</b>	<b>A</b>	<b>R</b>	<b>B1</b>		
---------------	------------	----------	----------	-----------	--	--

<b>04 ~ 100</b>	<b>A=</b> Tin 150µ" (Standard)	<b>R=</b> ROHS conform	<b>B1=</b> Bulk 100PCS	
	<b>B=</b> Tin 200µ"	<b>N=</b> NON ROHS conform	<b>Ix =</b> individuell	
	<b>C=</b> GF			
	<b>D=</b> Gold 2µ"			
	<b>E=</b> Gold 3µ"			
	<b>F=</b> Gold 10µ"			
	<b>G=</b> Gold 15µ"			
	<b>H=</b> Special			

<b>Machined Contact Pitch 1,27mm</b>	
Part No.:	<b>T40133</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1