
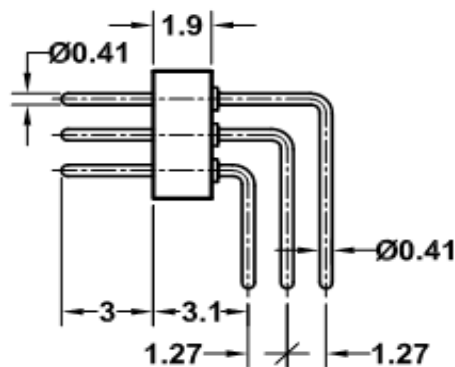


Technical Specification

| | |
|------------------------------|--|
| Insulator: | Black glass filled polyester PPS-GF-30-FR |
| Flammability: | UL 94V-0 |
| Sleeve: | Brass CuZn 36Pb3 (36000) |
| Mating Pin: (Ø) | 0,41mm |
| Mechanical Life: | min 500 cycles |
| Rated Current: | 1A |
| Contact Resistance: | max. 10m Ohm |
| Dielectric Strength: | min 500V rms |
| Minimal position of deliver: | 6 |
| Maximal position of deliver: | 150 |
| | |
| | |
| | |

Technical Drawing

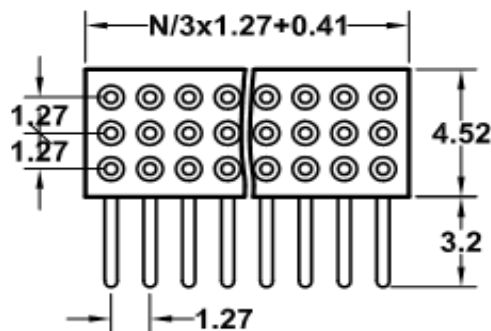

Ordering Information

| Serie | No. of Pos. | Solder Pin Plating | ROHS | Packing | | |
|-------|-------------|--------------------|------|---------|--|--|
|-------|-------------|--------------------|------|---------|--|--|

| | | | | | | |
|---------------|------------|----------|----------|-----------|--|--|
| T40135 | 150 | A | R | B1 | | |
|---------------|------------|----------|----------|-----------|--|--|

| | | | |
|-----------------|--------------------------------|----------------------------|-------------------------|
| 06 ~ 150 | A= Tin 150µ" (Standard) | R= ROHS conform | B1= Bulk 100PCS |
| | B= Tin 200µ" | N= NON ROHS conform | |
| | C= GF | | Ix = individuell |
| | D= Gold 2µ" | | |
| | E= Gold 3µ" | | |
| | F= Gold 10µ" | | |
| | G= Gold 15µ" | | |
| | H= Special | | |

| Machined Contact Pitch 1,27mm | |
|--|---------------|
| Part No.: | T40135 |
| Customer: | |

| | | | | | | | |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW: | Jason | CHKD | Jules | MATL: | Wu | DATE | 06.06.2009 |
| APPD: | Join | | | FINISH | Shieh | Sheet | 1 from 1 |