
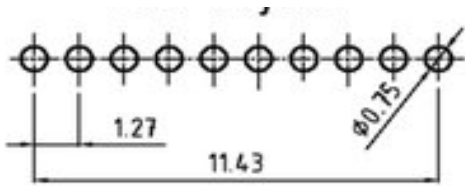
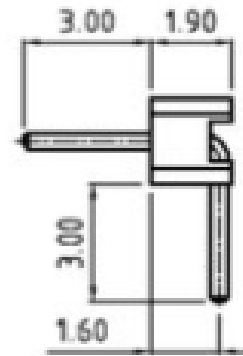


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Mating Pin: (Ø)	0,41mm
Mechanical Life:	min 500 cycles
Rated Current:	1A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 500V rms
Minimal position of deliver:	2
Maximal position of deliver:	50
Special Plastic:	Nylon 6T High Temperature Mat.

Technical Drawing

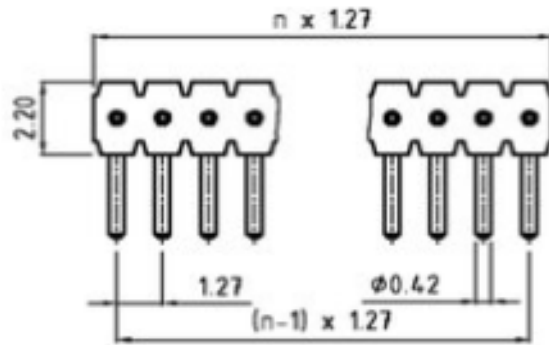

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	ROHS	Packing		
-------	-------------	--------------------	------	---------	--	--

T40142	50	C	R	B1		
---------------	-----------	----------	----------	-----------	--	--

02 ~ 50	A= Tin 150µ" (Standard)	R= ROHS conform	B1= Bulk 100PCS
	B= Tin 200µ"	N= NON ROHS conform	
	C= GF		Ix = individuall
	D= Gold 2µ"		
	E= Gold 3µ"		
	F= Gold 10µ"		
	G= Gold 15µ"		
	H=Special		

Machined Contact Pitch 1,27mm Diameter 0,42mm	
Part No.:	T40142
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	05.08.2021
APPD:	Join			FINISH	Shieh	Sheet	1 from 1