


Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (3finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	0,70 to 0,9mm Square 0,64
Forces:	polished steel gauge(Ø)0,76mm
.-Insertion:	1,2N typ.
.-Withdrawel:	0,6N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Maximal position of deliver:	2
Maximal position of deliver:	40

Technical Drawing

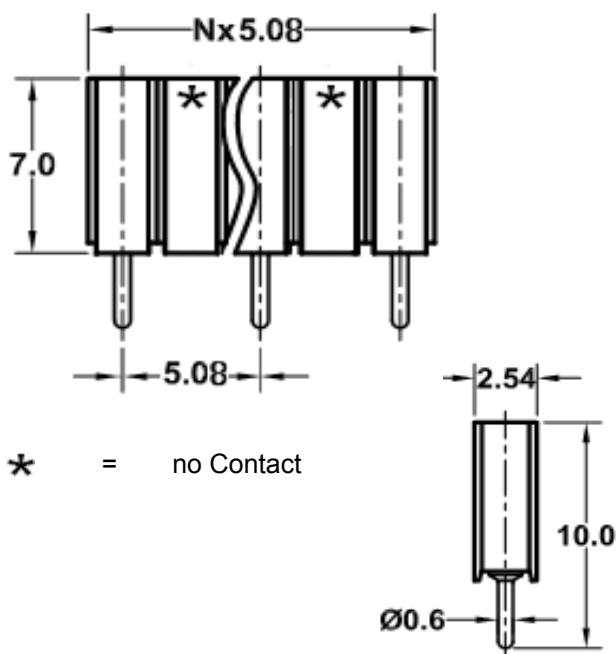

Ordering Information

Serie	No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing
T40220	40	A	3	R	B1

2 ~ 40	A = Tin 150µ" (Standard)	1 = Tin 150µ" 2 = Tin 200µ"	R = ROHS conform N = NON ROHS conform	B1 = Bulk 100PCS
	B = Tin 200µ"	3 = GF (Standard)		TR = Tape/Reel w. Pic and Place Pad
	C = GF	4 = Gold 2µ"		
	D = Gold 2µ"	5 = Gold 3µ"		TU = Tupe w. Pic and Place Pad
	E = Gold 3µ"	6 = Gold 10µ"		
	F = Gold 10µ"	7 = Gold 15µ"		
	G = Gold 15µ"	8 = Special		
	H = Special			

Machined Contact Pitch 5,08mm

Part No.: **T40220**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1