


EDCON COMPONENTS
A MEMBER OF EDCON-GROUP

Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Contact Clip (3finger):	Beryllium Copper (C17200)
Mating Pin: (Ø)	0,40 to 0,56mm
Forces:	polished steel gauge(Ø)0,43mm
.-Insertion:	2N typ.
.-Withdrawel:	1N typ.
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Pin length L=	5,0mm
Maximal position of deliver:	2
Maximal position of deliver:	40

Technical Drawing

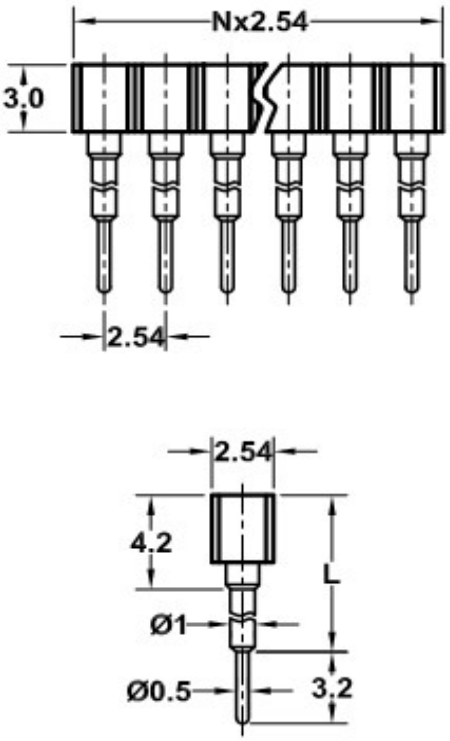

Ordering Information

Serie		No. of Pos.	Solder Pin Plating	Inner Clip Plating	ROHS	Packing	
T40303	-	**40**	**A**	**3**	**R**	**B1**	

2 ~ 40	**A**= Tin 150µ" (Standard)	**1**= Tin 150µ"	**R**= ROHS conform	**B1**= Bulk 100PCS
	B= Tin 200µ"	**2**= Tin 200µ"	**N**= NON ROHS conform	**TR** = Tape/Reel w. Pic and Place Pad
	C= GF	**3**= GF (Standard)		
	D= Gold 2µ"	**4**= Gold 2µ"		
	E= Gold 3µ"	**5**= Gold 3µ"		**TU** = Tupe w. Pic and Place Pad
	F= Gold 10µ"	**6**= Gold 10µ"		
	G= Gold 15µ"	**7**= Gold 15µ"		
	H=Special	**8**=Special		

Machined Contact Pitch 2,54mm

Part No.: **T40303**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	05.11.2026
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by S.Tiede

www.edcon-components.com email: info@edcon-components.com