


EDCON-COMPONENTS




Specifications

Material Housing	Thermoplastic High Temp UL94V-0
	Color Natural
Material Latch:	Thermoplastic High Temp UL94V-0
	Color Black
Terminal:	Copper Alloy
Fitting Nail:	Copper Alloy
Plating Finish:	Matt Tin / Gold flash overall
Fitting Nail:	Matt Tin overall
Electrical:	
Current Rating:	0,4A/AC/DC
Voltage Rating:	50V AC/DC
Temperature Range:	.- 25°C ~ +85°C
Contact Resistance:	40m Ohm max.
Insulation Resistance:	500M Ohm min.
Withstanding Voltage:	250V AC/Minute
Relative Humidity:	90% max.

P.C.B Layout

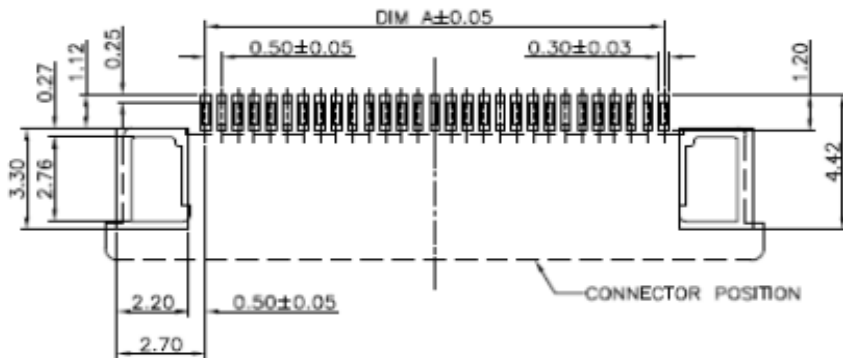

Drawing

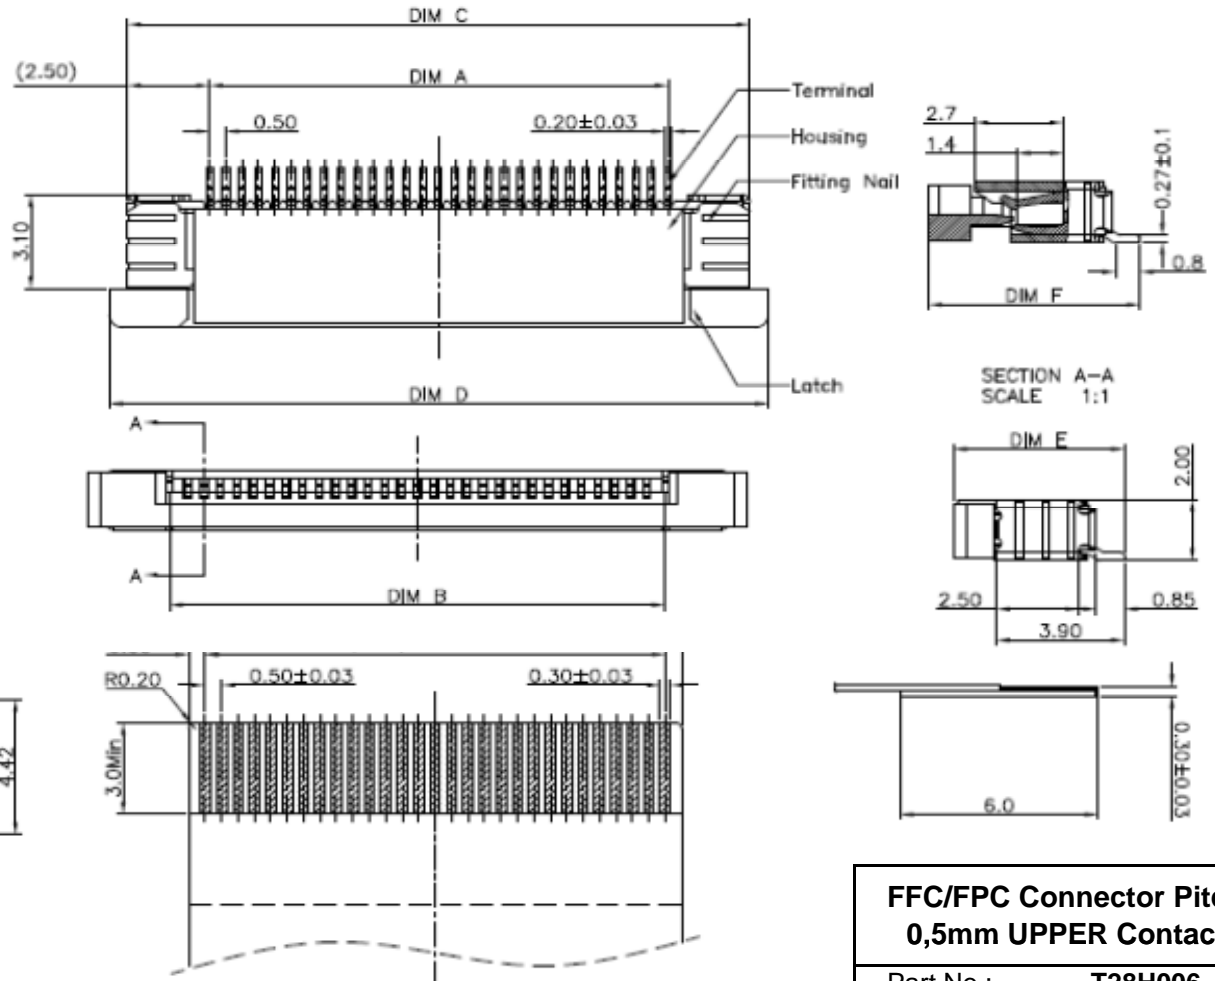

**FFC/FPC Connector Pitch
0,5mm UPPER Contact**

Part No.: **T28H006-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.07.2020
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Construction	Contact Plating	Material	Special function	Special function	ROHS	Packing		
T28H006-	xx	RS	T0	TP	0	0	R	TR		

XX= total		G0= Gold Flash		0= No function	0= No function	N=NON ROHS conform	
		T0= Tin plated	TP= themoplastic UL94V-0			R=ROHS conform	TU= Tube
		RS= Right angle SMT					TR= Tape Reel Packing

FFC/FPC Connector Pitch 0,5mm UPPER Contact	
Part No.:	T28H006-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.07.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

www.edcon-components.com


email: info@edcon-components.com




Lead Solder Curve

Lead free Solder Curve

Classification Reflow Profile (JEDEC J-STD-020C)

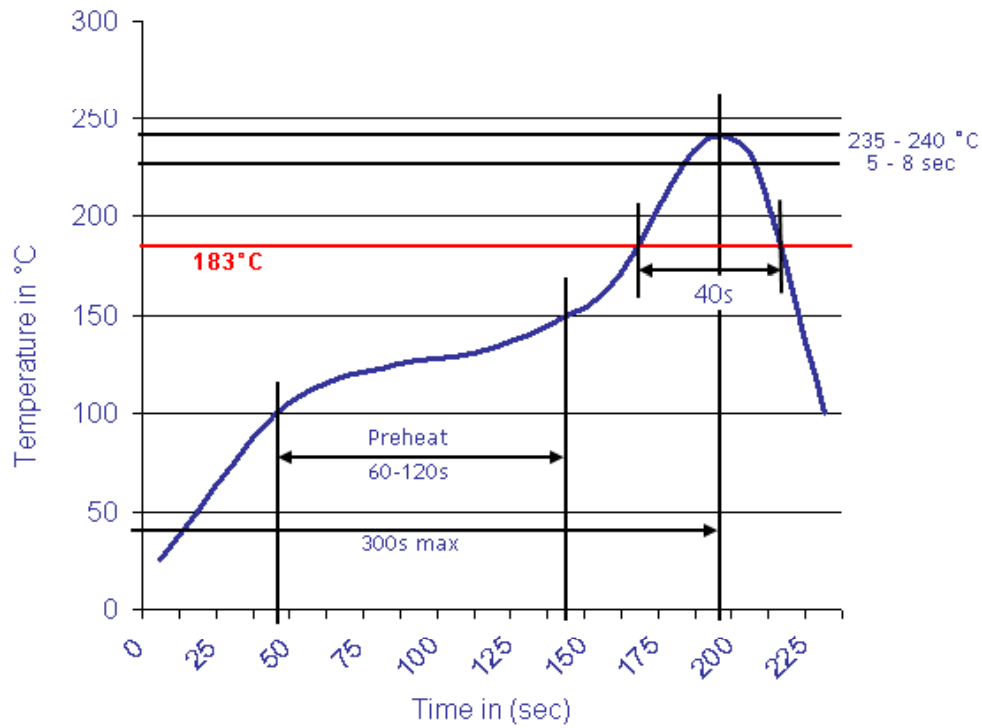

Classification Reflow Profile (JEDEC J-STD-020C)

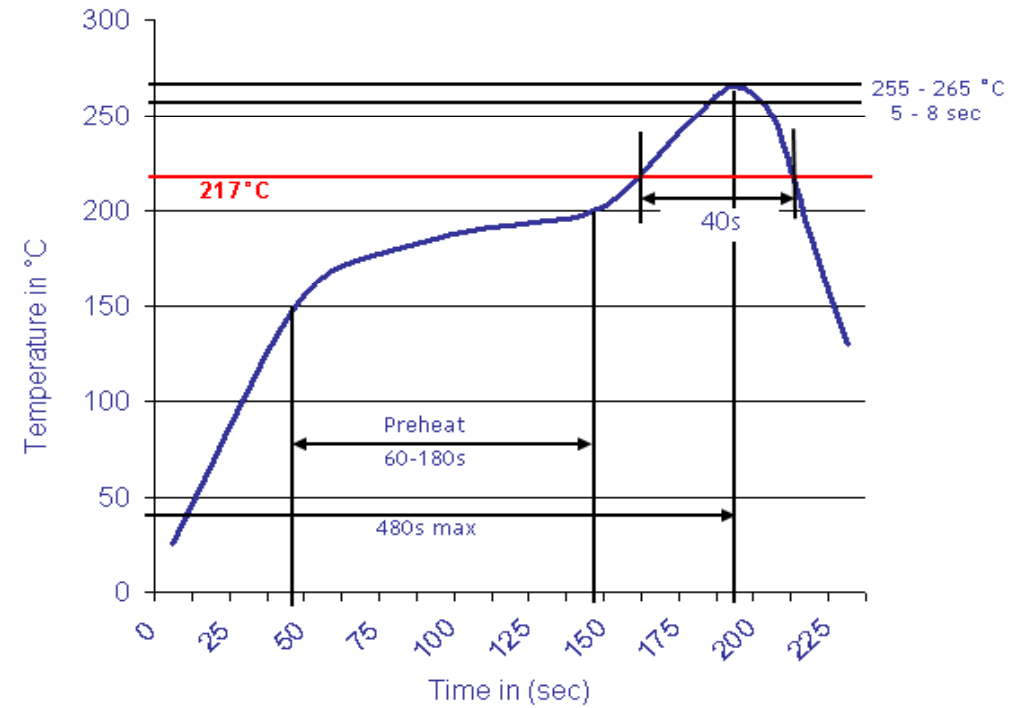

FFC/FPC Connector Pitch 0,5mm UPPER Contact	
Part No.:	T28H006-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.07.2020
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

www.edcon-components.com

email: info@edcon-components.com