






### Technical Specification



Pos.

Shield Cover:	Zn Alloy Chrome PTD
Strain Boot:	PVC
Leaf Spring:	Steel
Hook Button:	Zn Alloy Nickel PTD.
Set screw:	Steel nickel plated
T Holder:	Steel nickel plated
Hosing:	ABS
Terminals:	Brass Silver PTD.
Rating:	100VAC 1A max.
Contact Resistance:	Pin 30m Ohm max. Shell 50m Ohm max.
Insulation Resistance:	100M Ohm at 500VDC min.
Voltage Withstanding:	250VAC for 1 minute

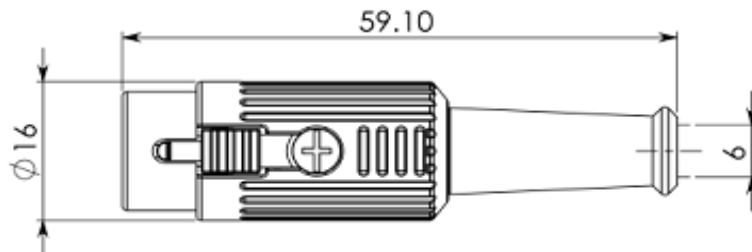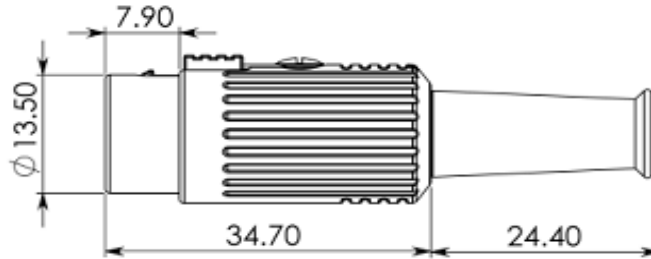

### Ordering Information

Serie	Pos.	ROHS	Packing			
T20C068	5B	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN CABLE PLUG METALL COVER WITH LOCK	
Part No.:	<b>T20C068</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	01.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008