

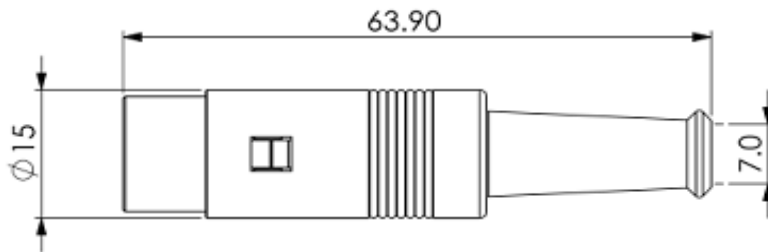


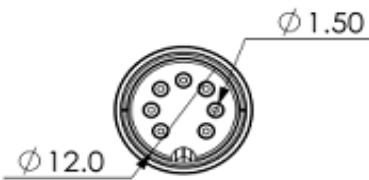

Pos.

**Technical Specification**

|                        |  |
|------------------------|--|
| Shell cover:           | Brass Nickel plated                    |
| Strain boot:           | PVC                                    |
| Shield Cover A:        | Steel Nickel plated                    |
| Shield Cover B:        | Steel Nickel plated                    |
| Housing:               | ABS                                    |
| Terminals:             | Brass Silver plated                    |
| Rating:                | 100VAC 1A max.                         |
| Contact Resistance:    | Pin 30m Ohm max.<br>Shell 50m Ohm max. |
| Insulation Resistance: | 100M Ohm at 500VDC min.                |
| Voltage Withstanding:  | 250VAC for 1 minute                    |

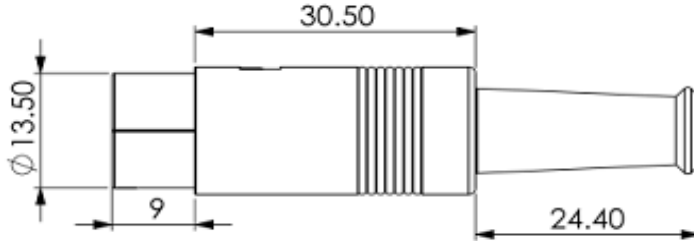

**Ordering Information**

| Serie   | Pos. | ROHS | Packing |  |  |  |
|---------|------|------|---------|--|--|--|
| T20C093 | 4    | R    | B       |  |  |  |

|  |             |                 |  |
|--|-------------|-----------------|--|
|  | N= non ROHS | B= Bulk-Ware    |  |
|  | R= ROHS     | IN= individuell |  |
|  |             |                 |  |

|                                       |                |
|---------------------------------------|----------------|
| DIN CABLE PLUG METALL COVER WITH LOCK |                |
| Part No.:                             | <b>T20C093</b> |
| Customer:                             |                |

|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 01.06.2007 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 1 from 1   |