





Pos.


Technical Specification

Shield Cover: Zn Alloy Chrome plated
 Bayonett Cap: Zn Alloy Chrome plated
 Strain Boot: PVC
 Set Screw: Steel Nickel plated
 T Holder: Steel Nickel plated
 Housing: ABS
 Terminals: Brass silver plated

Rating: 100VAC 1A max.
 Contact Resistance: Pin 30m Ohm max.
 Shell 50m Ohm max.
 Insulation Resistance: 100M Ohm at 500VDC min.
 Voltage Withstanding: 250VAC for 1 minute

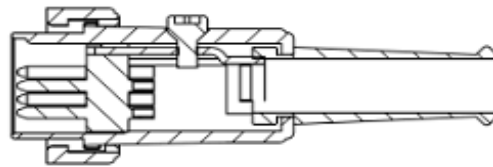

SECTION A-A

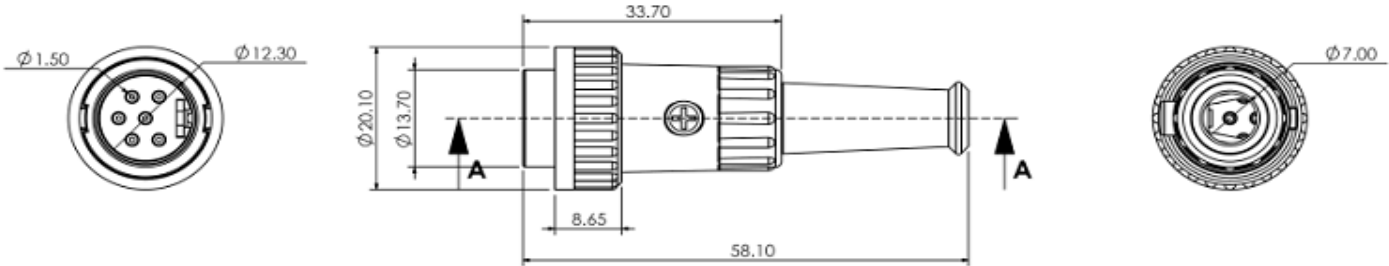

Ordering Information

Serie	Pos.	ROHS	Packing			
T20C137	3	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN CABLE PLUG METALL COVER WITH BAJONET LOCK	
Part No.:	T20C137
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	01.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 1