





### Technical Specification




Shell Cover:	Brass Nickel plated
Strain Boot:	PVC
T-Holder:	Steel Nickel plated
GND Contactour:	Phosphor Bronze Nickel plated
Set Screw:	Steel Nickel plated
Housing:	ABS
Terminals:	Copper Silver plated
Rating:	100VAC 1A max.
Contact Resistance:	Pin 30m Ohm max. Shell 50m Ohm max.
Insulation Resistance:	100M Ohm at 500VDC min.
Voltage Withstanding:	250VAC for 1 minute

Pos.

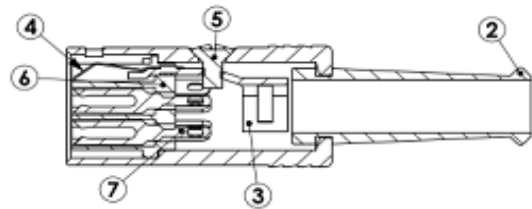

SECTION A-A

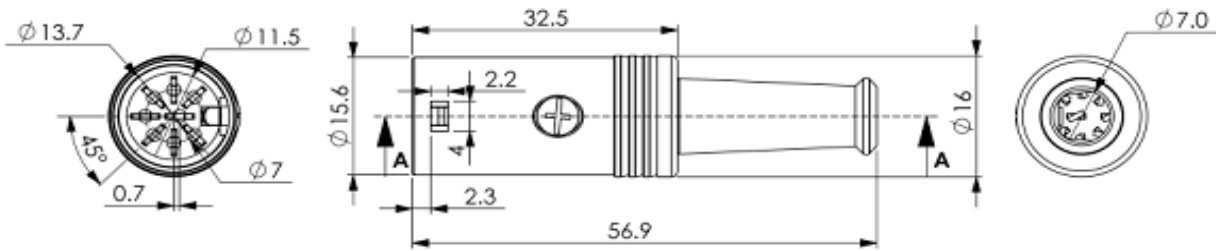

### Ordering Information

Serie	Pos.	ROHS	Packing			
T20D029	5B	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN FEMALE MOLDING PLASTIC COVER W. PUSH LOCKING	
Part No.:	<b>T20D029</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	01.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 1