







Technical Specification



Shell Cover:	Brass Nickel plated
Strain Boot:	PVC
Shield Cover A:	Steel Nickel plated
Shield Cover AB:	Steel Nickel plated
Housing:	ABS
Terminals:	Copper Silver plated
Rating:	100VAC 1A max.
Contact Resistance:	Pin 30m Ohm max. Shell 50m Ohm max.
Insulation Resistance:	100M Ohm at 500VDC min.
Voltage Withstanding:	250VAC for 1 minute

Pos.

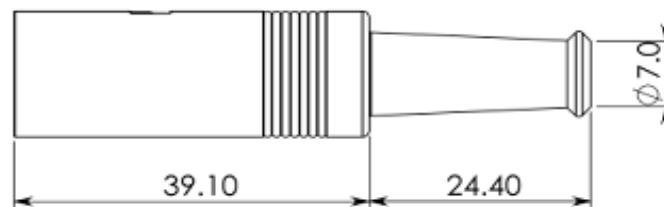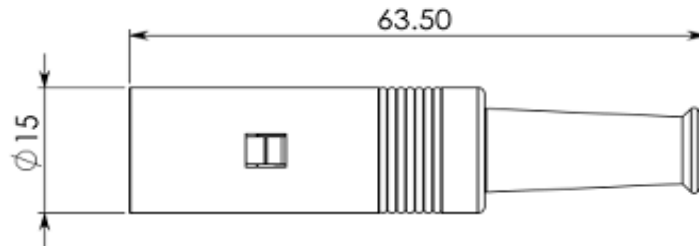

Ordering Information

Serie	Pos.	ROHS	Packing			
T20D065	8B	R	B			

	N= non ROHS	B= Bulk-Ware	
	R= ROHS	IN= individuell	

DIN FEMALE METAL COVER W. PUSH LOCKING	
Part No.:	T20D065
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	01.06.2007
APPD:	Join			FINISH	Shieh	Sheet	1 from 1

Copyright by EDCON-COMPONENTS H.Schmitt 20.6.2008