


EDCON-COMPONENTS

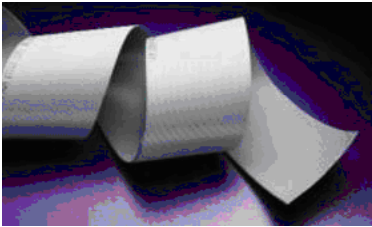


Technical Information

Style	UL2651	Voltage Rating:	300V
AWG / Construction:	28 = 7/0.127mm	Current Rating:	1A
Stranded Tinned Copper		Dielectric withstand.	2000V AC/minute
Pitch	1,27mm	Temperature Range:	-20°C ~ 105°C
Insulation thickness	0,9mm	Contact Resistance:	0,127<237Ω/km 0.100 <397Ω/km
Cores	2 ~ 68Pos.	Insulation Resistance:	100MΩ/km min.
Conductor Wire	Copper		
Insulation Material:	Polyvinyl Chloride (PVC)		

Technical Specification

Cores	O.D (N)	O.D (W)	Tolerance (mm)	Feet/ Reel	Meter / Reel
2	0,90	2,54	+.0,15	1639	500
3	0,90	3,81	+.0,15	1639	500
4	0,90	5,08	+.0,15	1639	500
5	0,90	6,35	+.0,15	1639	500
6	0,90	7,62	+.0,20	251	76,5
7	0,90	8,89	+.0,20	251	76,5
8	0,90	10,16	+.0,20	251	76,5
9	0,90	11,43	+.0,20	251	76,5
10	0,90	12,70	+.0,20	251	30,5 / 76,5
11	0,90	13,97	+.0,20	251	30,5 / 76,5
12	0,90	15,24	+.0,20	251	30,5 / 76,5
13	0,90	16,51	+.0,20	251	30,5 / 76,5
14	0,90	17,78	+.0,20	251	30,5 / 76,5
15	0,90	19,05	+.0,20	251	30,5 / 76,5
18	0,90	22,86	+.0,30	251	30,5 / 76,5
20	0,90	25,40	+.0,30	251	30,5 / 76,5
22	0,90	27,94	+.0,30	251	30,5 / 76,5
24	0,90	30,48	+.0,30	251	30,5 / 76,5
26	0,90	33,02	+.0,30	251	30,5 / 76,5
28	0,90	35,56	+.0,30	251	30,5 / 76,5
30	0,90	38,10	+.0,30	251	30,5 / 76,5
32	0,90	40,64	+.0,40	251	30,5 / 76,5
34	0,90	43,18	+.0,40	251	30,5 / 76,5
36	0,90	45,72	+.0,40	251	30,5 / 76,5

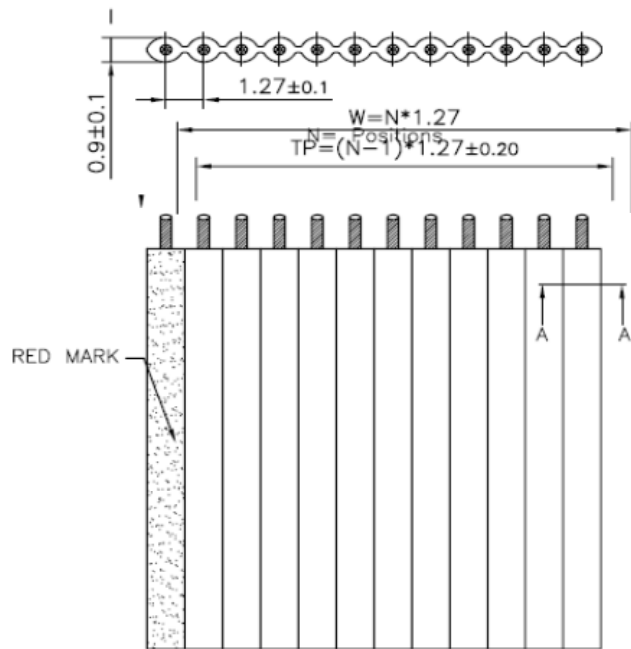


**FLAT CABLE AWG28 Gray
Pitch 1,27mm**

Part No.: **T29001-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS

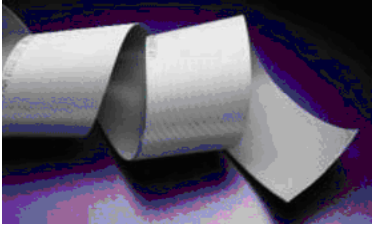

Technical Specification

Cores	O.D (N)	O.D (W)	Tolerance (mm)	Feet/ Reel	Meter / Reel
38	0,90	48,26	+.0,40	251	30,5 / 76,5
40	0,90	50,80	+.0,40	251	30,5 / 76,5
42	0,90	53,34	+.0,40	251	30,5 / 76,5
44	0,90	55,88	+.0,40	251	30,5 / 76,5
46	0,90	58,42	+.0,40	251	30,5 / 76,5
48	0,90	60,96	+.0,40	251	30,5 / 76,5
50	0,90	63,50	+.0,40	251	30,5 / 76,5
60	0,90	76,20	+.0,50	251	30,5 / 76,5
64	0,90	81,28	+.0,50	251	30,5 / 76,5
68	0,90	86,36	+.0,50	251	30,5 / 76,5

Ordering Informations

Serie	Cores	Color	M/Reel
-------	-------	-------	--------

T29001-	10	GR	76
----------------	-----------	-----------	-----------

10= 2~68Pos.	GR= Gray w. RED-Line	30= 30,5 Meter/Reel
		76= 76,5 Meter/Reel
		150= 150 Meter/Reel

**FLAT CABLE AWG28 Gray
Pitch 1,27mm**

Part No.: **T29001-**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.01.2019
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

www.edcon-components.com

email: info@edcon-components.com