







# EDCON-COMPONENTS



## Technical Description

Curent Rating:	50A W to W
Voltage Rating:	600V
Contact Resistance:	20mΩ max.
Withstanding Voltage:	1000VAC/minute
Insulator Material:	Nylon UL94V-0
Operating Temperature:	.-40°c to + 130°C
Standard Body Colour:	Black
Contact Material:	Copper
Contact Plating:	TIN-Plated
No Pin available:	2 ~ 6 circuits
Wire Size:	AWG 8 ~ 16
Use w. Terminals:	T68U005

## Drawing

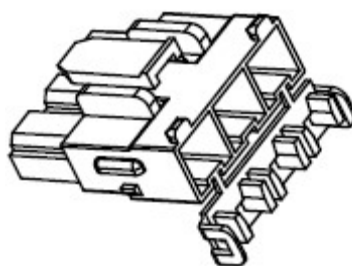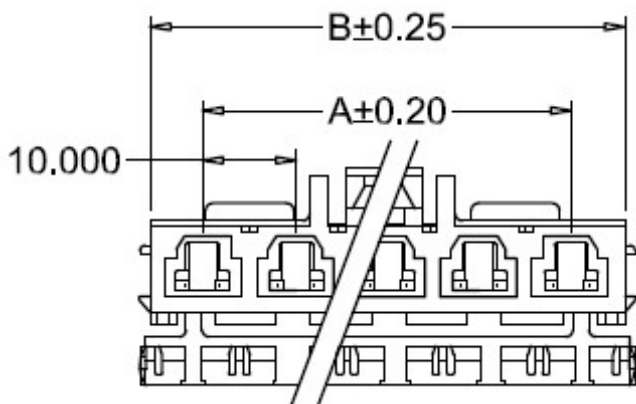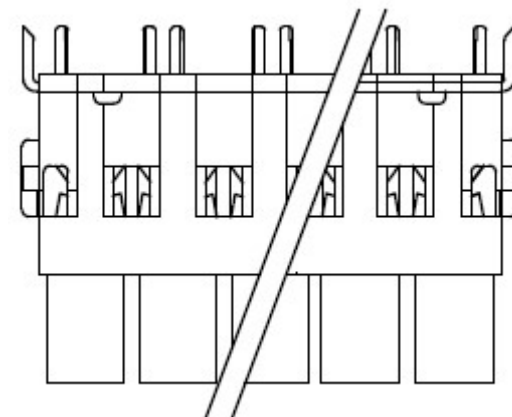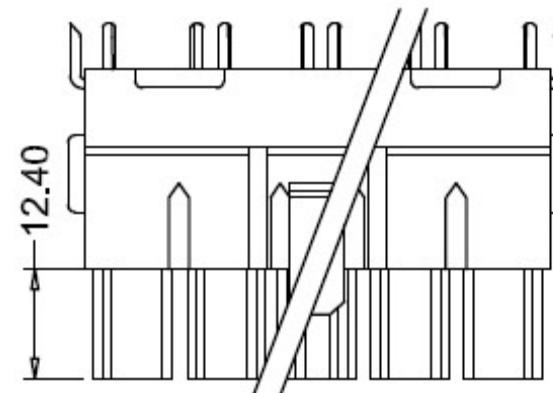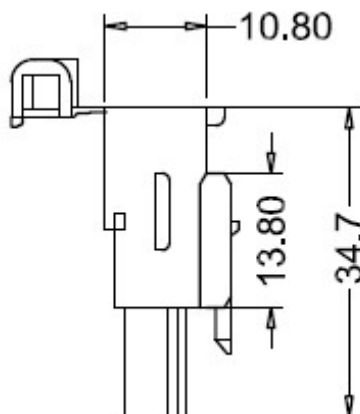

**Housing for Wire to Board  
Connector (Wafer) Straight Pin  
Pitch 10,0mm**

Part No.: **T68U002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2018
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 3

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



### Dimension (mm)

No Pin	A	B	C	D
2	10,00	31,30		
3	20,00	41,30		
4	30,00	51,30		
5	40,00	61,30		
6	50,00	71,30		

**Housing for Wire to Board  
Connector (Wafer) Straight Pin  
Pitch 10,0mm**

Part No.: **T68U002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2018	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3	

# EDCON-COMPONENTS



## Ordering Informations

Serie	No. Of Position	Special Function	Special Function	Color of Body	Special Function	Special Function	ROHS	Packing		
<b>T68U002</b>	<b>02</b>	<b>NN</b>	<b>NN</b>	<b>BK</b>	<b>N</b>	<b>N</b>	<b>R</b>	<b>BU</b>		

02= 2Pos.				N= No Function	N= No Function	R= ROHS Conform	BU= Bulk-Ware
2 ~ 6Pos.			BK= Black			N= NON ROHS Conform	TU= Tube Packing
							TC= Tube w. Cap Packing
							TR= Tape/Reel Packing w. Cap w. needed
							IV= Individual Packing

<b>Housing for Wire to Board Connector (Wafer) Straight Pin Pitch 10,0mm</b>	
Part No.:	<b>T68U002</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	22.03.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3